INSTALLATION

DX8100 Series
Digital Video Recorder

C2629M-A (6/07)

Contents

Before You Begin 8

Additional Warnings 9

Regulatory Notices 10

Video Quality 10

Description 11
- What is A DVR? 11
- Features 12
  - New Product Features 12
  - Additional Features 12
- Models 13
- Optional Accessories 14

Parts List 15

Application Examples 16

Equipment Rack Mounting 18

Back Panel Layout 20

Hardware Setup 21
- Basic Connections 21
- Network Setup 22
- RS-422/RS-485 Communication Port Setup 22
- Alarm Input Installation 24
- Relay Output Installation 25

Software Setup 26
- Starting the Unit 26
- Logging in for the First Time 26
- Shutting Down 27
- Exiting to Windows Operating System 27
- Setting the System Language 28
  - Configuring the Regional Setting in the Windows Operating System 28
  - Configuring the Language Setting of the DX8100 31
- Setting the System Time 32
- Enabling and Using Ctrl+Alt+Del 33
  - Using Ctrl+Alt+Del 33
- Network Software Configuration 33
  - DHCP Setup 35
  - Static IP Setup 35
  - TCP/IP Port and Bandwidth Throttle Setup 36
  - Accessing Network Information 37
  - DNS/WINS Setup 37
- RS-422/RS-485 Communication Port Software Configuration 38
- Client Software Setup 39
  - Recommended System Requirements 39
  - Installing the PC Client Application 40
  - Enabling IPSec Security Services 43
  - Disabling IPSec Security Services 43
  - Installing the Client Emergency Agent Application 43
  - Installing the DX8100 Viewer 47
  - Installing the DX8100 Web Client 49
  - Recommended System Requirements for Mobile (PDA) Client 51
  - Installing the Mobile (PDA) Client application 51

Accessing DX8100 Electronic Documentation 54

Appendix A: Printer Setup 56
Printer Hardware Setup 56
Printer Software Setup 57
Setting Up a Local Plug-and-Play Printer 57
Setting Up a Local Printer that is Not Plug-and-Play 60
Setting Up a Network Printer 64

Appendix B: Connecting the Optional DX8108/DX8116-MUX Card 67

Appendix C: Connecting Audio Devices 68
Setting Up Standard Audio Inputs 68
Setting Up Optional Audio Connections 68
Setting Up Audio Output 70

Appendix D: Connecting an Uninterruptible Power Supply (UPS) 71
UPS to DVR Communication and Power Connections 71
Software Setup for a USB Connected UPS Device 72

Appendix E: External Storage Expansion Using DX9200HDDI 74

Appendix F: Connecting a KBD300A Keyboard 75
Required Items 76
Installing KBD300A Hardware 76
Selecting the KBD300A Operational Mode 77

Appendix G: Connecting ATM/POS Devices 78
ATM/POS Configurations 78
Connecting ATM/POS Hardware 79
Using the VSI-PRO Triport Cable 79
Setting Up a RS-232 ATM/POS Device Configuration 80
Setting Up a RS-422 ATM/POS Device Configuration 81
Configuring DX8100 ATM/POS Communication Options 84

Specifications 90

List of Illustrations

1 System with Single DX8100 . . . 16
2 System with Multiple DX8100s . . . 16
3 System with Multiple DX8100s and Multiple Clients . . . 16
4 Network with DX8000, Third-Party Domes, ATM/POS, Using KDB300A Keyboard . . . 17
5 Remove Left and Right Side Plates . . . 18
6 Attaching Rack Ears and Handles . . . 18
7 Rack Mount Installation . . . 19
8 Back Panel Layout . . . 20
9 Basic Connections . . . 21
10 LAN/WAN Cable Connection . . . 22
11 RS-422/RS-485 Configuration Example 1 . . . 23
12 RS-422/RS-485 Configuration Example 2 . . . 23
13 Cable Wiring Schemes . . . 24
14 Alarm Terminal Installation . . . 24
15 Relay Terminal Installation . . . 25
16 Front Panel and Power Switch . . . 26
17 User Log-in Dialog Box . . . 26
18 Set Admin Password Dialog Box . . . 27
19 Shut Down Dialog Box . . . 27
20 Shut Down Dialog Box . . . 28
21 Control Panel with Regional Options Selected . . . 28
22 Regional Options Dialog Box . . . 29
23 Select System Locale Dialog Box . . . 29
24 Regional Options Dialog Box . . . 30
25 General Dialog Box . . . 30
26 Change Regional Options Dialog Box . . . 30
27 System Page: Selecting the Language . . . 31
28 Setting the System Time . . . 32
29 Network Setup Page: Software Configuration . . . 34
30 DHCP Setup . . . 35
31 Static IP Setup . . . 35
32 Base Port and Bandwidth Throttle Setup . . . 36
33 IP Configuration Status Box . . . 37
34 DNS/WINS Setup . . . 38
35 RS-422/RS-485 Port Setup Page . . . 38
36 Resource CD Screen: PC Client Installation Option . . . 40
37 Resource CD Software Installation Options . . . 40
38 DX8100 Security Setup Dialog Box . . . 40
39 DX8100 Client Setup Dialog Box . . . 41
40 Software License Agreement Dialog Box . . . 41
41 Select Installation Folder Dialog Box . . . 42
42 Installation is Completed Successfully Dialog Box . . . 42
43 Enabling IPSec Security for the PC Client Application . . . 43
44 Disabling IPSec Security for the PC Client Application . . . 43
45 Resource CD Screen: Emergency Agent Installation Option . . . 44
46 Resource CD Software Installation Options . . . 44
47 DX8100 Emergency Agent Setup Dialog Box . . . 45
48 Emergency Agent Software License Agreement Dialog Box . . . 45
49 Select Installation Folder Dialog Box . . . 45
50 Installation is Completed Successfully Dialog Box . . . 46
51 Resource CD Window_C2629M-A_0001 . . . 47
52 Resource CD Software Installation Options . . . 47
53 DX8100 Viewer Dialog Box . . . 48
54 Software License Agreement Dialog Box . . . 48
55 Select Installation Folder Dialog Box . . . 48
56 Installation is Completed Successfully Dialog Box . . . 49
57 Enter Network Password Dialog Box . . . 50
58 Security Warning Dialog Box: ActiveX Control Installation www activex . . . 50
59 PDA to PC Connection . . . 51

60 Resource CD Window: Mobile Client Installation Option . . . 51
61 Resource CD Software Installation Options . . . 52
62 Pocket PC Installation Dialog Box . . . 52
63 License Agreement Dialog Box . . . 53
64 Installing Applications Dialog Box . . . 53
65 Application Downloading Complete Dialog Box . . . 53
66 Resource CD Window: Mobile Client Installation Option . . . 54
67 Resource CD Window: PC Client Installation Option . . . 55
68 Printer Connection . . . 56
69 Printer Setup Window (Plug-and-Play) . . . 57
70 Add Printer Wizard Dialog Box (Plug-and-Play) . . . 58
71 Local or Network Printer Dialog Box (Plug-and-Play) . . . 58
72 Finding and Initializing a Plug-and-Play Printer . . . 59
73 Completing the Add Printer Wizard Dialog Box (Plug-and-Play) . . . 59
74 Printer Window (Not Plug-and-Play) . . . 60
75 Welcome to the Add Printer Dialog Box . . . 60
76 Local or Network Printer Dialog Box (Not Plug-and-Play) . . . 61
77 Select the Printer Port Dialog Box (Not Plug-and-Play) . . . 61
78 Add Printer Wizard Dialog Box (Not Plug-and-Play) . . . 62
79 Name Your Printer Dialog Box (Not Plug-and-Play) . . . 62
80 Printer Sharing Dialog Box (Not Plug-and-Play) . . . 63
81 Print Test Page Dialog Box (Not Plug-and-Play) . . . 63
82 Completing the Add Printer Wizard Dialog Box (Not Plug-and-Play) . . . 63
83 Printer Window (Network) . . . 64
84 Welcome to the Add Printer Wizard Dialog Box (Network) . . . 64
85 Local or Network Printer Dialog Box (Network) . . . 65
86 Locate Your Printer Dialog Box (Network) . . . 65
87 Browse For Printer Dialog Box (Network) . . . 65
88 New Printer Detection Dialog Box (Network) . . . 66
89 Completing the Add Printer Wizard Dialog Box . . . 66
90 DX8100-MUX8/16 Display Card Connections . . . 67
91 Audio Connector Installation . . . 68
92 Example: 8-Audio Input Cable Configuration . . . 69
93 Example: 16-Audio Input Cable Pinouts . . . 69
94 Audio Output Configuration Example . . . 70
95 UPS to DX8100 Connections . . . 71
96 Control Panel Window with Power Options Selected . . . 72
97 Power Options Properties Dialog Box . . . 72
98 Critical Battery Alarm Actions Dialog Box . . . 73
99 KBD300A Connected to the DX8100 . . . 75
100 KBDKIT Wall Block and RJ-45 Cable Wiring . . . 76
101 Connecting the KBD300A to the DX8100 . . . 77
102 Setting the KBD300A DIP Switch . . . 77
103 VSI-PRO DB9-to-DB9 Triport Cable . . . 79
104 RS-232 ATM/POS Device Configuration . . . 80
105 RS-422 ATM/POS Device Configuration . . . 80
106 Multiple ATM/POS Device Configuration . . . 82
107 PV140 RS-232 to RS-422/485 Converter . . . 82
108 PV140 and User-Supplied RJ-45 Cable Wiring . . . 83
109 Port/Device Page . . . 84
110 Device Configuration Page: General Tab . . . 85
111 Data Format List Page . . . 85
112 Data Format Dialog Box . . . 86
113 Data Format List . . . 86
114 Assigning a Data Format to An ATM/POS Device . . . 87
115 Event-Recording Link Settings Page . . . 88
116 Schedule Setup Page . . . 88
117 Example of ATM/POS Data Transaction Recording . . . 89

List of Tables

A	DX8100 Optional Accessories	14
B	Video Coaxial Cable Requirements	21
C	TCP/IP Ports Used by the DX8100	36
D	RS-422/RS-485 Port Settings	39
E	DX8100 Documentation	54
F	Parts of the DX8100 and KBD300A Installation	75
G	Items Needed to Install the KBD300A	76
H	ATM/POS Configurations	78
I	VSI-PRO DB9-to-DB9 Triport Cable	79
J	Items Required for a Single RS-232 ATM/POS Device Configuration	80
K	Items Required for a Dual RS-422 ATM/POS Device Configuration	81
L	Items Required for the Multiple ATM/POS Device Configuration	82
M	VSI-PRO DB9-to-DB9 Triport Cable	83
N	PV140 DB9 Pinouts	83

Before You Begin

Before installing or using your DX8100 Series digital video recorder (DVR), complete and save the information on this page.

Installing the DX8100 DVR on a network will require support from your network administrator. The minimum network requirements for DX8100 Series DVRs include a *switched* Ethernet LAN with a bandwidth of 100 Mbps. Contact your administrator to assist you in configuring the network features of the unit.

Obtain and write down the following information from your network administrator:

1. A unique site name for each DVR. (Site names can be up to 32 characters and can include spaces.)

   _____ _____

   _____ _____

2. A unique system ID for each DVR. (You must change the system ID of each DX8100 you connect on a network segment to avoid conflicts. System IDs must start with a letter, can be up to 15 characters long, and cannot contain spaces or special characters.)

   _____ _____

   _____ _____

3. The TCP/IP port numbers that will be used by all DX8100 servers and clients on the network.

_____	_____	_____	9005 (fixed)	13900 (fixed)
Base Port	Upgrade Port	Emergency Agent Port	Information Port	Ping Port
(Default = 9002)	(Default = 9003)	(Default = 9004)	(Default = 9005)	(Default = 13900)

If your network is not configured for DHCP, obtain and write down the following information from your network administrator:

4. A unique IP address for each DVR. (For example, 10.0.0.101, 10.0.0.102, 10.0.0.103, etc.)

   ___.___.___.___ ___.___.___.___

   ___.___.___.___ ___.___.___.___

5. The subnet mask for each IP address. (For example, is 255.0.0.0.)

   ___.___.___.___ ___.___.___.___

   ___.___.___.___ ___.___.___.___

6. The default gateway IP address for each unit.

   ___.___.___.___ ___.___.___.___

   ___.___.___.___ ___.___.___.___

7. The Primary DNS Server IP address for each unit.

   ___.___.___.___ ___.___.___.___

   ___.___.___.___ ___.___.___.___

8. The Secondary DNS Server IP address for each unit.

   ___.___.___.___ ___.___.___.___

   ___.___.___.___ ___.___.___.___

9. The Multicast Group IP address.

   ___.___.___.___ ___.___.___.___

   ___.___.___.___ ___.___.___.___

Additional Warnings

There are important observations and warnings that you should be aware of.

- Read and keep all instructions, including the Important Safety Instruction sheet that was supplied with your DVR.
- When using the networking capabilities of the DX8100, Pelco recommends that each DX8100 Series DVR be connected to a secure, private network. Do not directly connect your DVR to a public network such as the Internet.
- It is recommended that the recorder be connected to an uninterruptible power supply (UPS) capable of supplying 2 A for 120 VAC power systems or 1 A for 230 VAC power systems

⚠ **CAUTION:** The recorder should be installed in an air conditioned room where the temperature is maintained between 50° and 90° F (10° and 35°C) with relative humidity not to exceed 80 percent, noncondensing.

⚠ **WARNING:**

- When using the networking capabilities of the DX8100, you should connect each DX8100 Series DVR to a secure, private network. Do not directly connect your DVR to a public network such as the Internet.
- All operating system files, applications, and utilities necessary to operate the DX8100 have been preinstalled on the unit. Do not install or use any software, including antivirus utilities, other than those installed at the factory.
- Do not install any additional hardware on the DX8100 Series DVR other than those devices listed in the documentation accompanying the unit. Do not remove, replace, or change any existing hardware without first consulting Pelco Product Support or an authorized Pelco service center.

Regulatory Notices

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RADIO AND TELEVISION INTERFERENCE

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that the interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

You may also find helpful the following booklet, prepared by the FCC: "How to Identify and Resolve Radio-TV Interference Problems." This booklet is available from the U.S. Government Printing Office, Washington D.C. 20402.

Changes and Modifications not expressly approved by the manufacturer or registrant of this equipment can void your authority to operate this equipment under Federal Communications Commission's rules.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Video Quality

FRAME RATE NOTICE REGARDING USER-SELECTED OPTIONS

Pelco systems are capable of providing high quality video for both live viewing and playback. However, the systems can be used in lower quality modes, which can degrade picture quality, to allow for a slower rate of data transfer and to reduce the amount of video data stored. The picture quality can be degraded by either lowering the resolution, reducing the picture rate, or both. A picture degraded by having a reduced resolution may result in an image that is less clear or even indiscernible. A picture degraded by reducing the picture rate has fewer frames per second, which can result in images that appear to jump or move more quickly than normal during playback. Lower frame rates may result in a key event not being recorded by the system.

Judgment as to the suitability of the products for users' purposes is solely the users' responsibility. Users shall determine the suitability of the products for their own intended application, picture rate and picture quality. In the event users intend to use the video for evidentiary purposes in a judicial proceeding or otherwise, users should consult with their attorney regarding any particular requirements for such use.

Description

The DX8100 Series digital video recorders (DVRs) are professional security-level DVRs based on a new and innovative hardware platform that is powered by unparalleled and unique high-performance software. As the security requirements of your business expand into multiple sites and become more diversified, you need a professional DVR that you can quickly and effortlessly increase the channel and recording capacity.

- The DX8100 is interoperable with your existing DX8000 DVRs, allowing you to build upon your existing security system. A DX8100 client can operate and administer both the DX8100 and DX8000 within the same network.
- When you need to quickly and easily add more security cameras, the new DX8100-EXP 16-channel expansion unit extends the 8- or 16-channel DX8100 to 24 or 32 channels. With or without the channel expansion unit, all of the cameras can now take advantage of the increased frame rate of 2CIF and 4CIF recording. The DX8100 records video up to 480 images per second ips at a maximum CIF image size.
- If your security project requirements increase storage capacity, you can extend internal storage up to 3 TB. With the optional DX9200 HDDI, you can further increase the DX8100 storage capacity. Alternately, you can use the DX9200 HDDI as a redundant RAID solution.
- As your audio security needs grow, use the DX8108-AUD or DX8116-AUD audio option to add a total of 8 or 16 audio inputs.
- Sophisticated video security applications require a network of DVRs to monitor multiple locations. The 10/100/1000 megabit Ethernet port supports today's high-speed networks. You can network your DX8100 and DX8000 systems and remotely operate the DVRs for continuous, motion detection, alarm, ATM/POS, normal scheduled recording, and administer and view live and playback video. For time-critical security applications, you must ensure that all video recordings are synchronized to an accurate time source. The DX8100 supports the network time protocol (NTP), which allows you to synchronize all networked DX8100s to one NTP time server.

WHAT IS A DVR?

A DVR is a video recording and playback device that incorporates all of the essential capabilities of a VCR but adds significant advantages. Like a VCR, video is recorded (from one or more cameras) and stored for later playback and retrieval. However, in a DVR, video data is recorded and stored on a hard disk instead of magnetic tape. Storing video in this manner facilitates instant, random access to data, as opposed to sequential access inherent to tape-based recording. This means no fast-forwarding or rewinding is necessary to locate the data a user wants to view or export.

Another key advantage of hard disk is decreased maintenance. With no need to replace tapes, DVRs with hard disks can be left unattended for extended periods of time. Since video remains in the digital domain, data is easy to store, transport, and manipulate. Unlike analog video recordings, digital data does not suffer from a loss in quality when copied or moved from device to device.

Because DVRs rely on hard disks instead of tape, data storage is virtually unlimited. Video data can also take advantage of compression technology to increase the efficiency of storage media. Modern DVRs, such as the DX8100, allow users to record, play back, and view live video simultaneously. Keeping data in a digital format means video can be easily backed up to a variety of storage media. This also means that alphanumeric information, such as date, time, and transaction statistics, can be synchronously recorded with video.

FEATURES

This section describes new and additional DX8100 DVR features.

NEW PRODUCT FEATURES

The DX8100 v1.0 release includes new features as follows:

- Windows® XP Embedded
- MUX card output
- Two built-in audio channels
- Optional Layer two multicasting
- Interoperable with DX8000 DVRs
- 16-Channel expansion box option
- Maximum increased storage capacity of 3 TB
- External storage RAID option with DX9200HDDI
- Increased frame rate for 2CIF and 4CIF recording
- Standard analog output
- NTP time server compatible
- Standard DVD-R writes to CD-R and DVD-R media
- Up to 704 x 480 recording resolution (4CIF)
- Up to 32 camera inputs and outputs with auto termination

ADDITIONAL FEATURES

The DX8100 includes additional features as follows:

- Up to 36 camera views for DX8100 Server or Client
- Online Help
- Up to 32 channels of audio recording (optional)
- Choice of 8/16/24/32 alarm inputs and 8/16/24 relay outputs
- Camera view favorites
- Instant playback
- Quick menu option to turn on/off relays
- Live audio over the network
- Video loss event start and recovery time
- Video loss event linked to an alarm
- Up to 480 ips recording rate at 320 x 240 resolution (NTSC)
- Up to 100 servers in client tree
- Connect any five DX8100 servers in a network or any combination of DX8100 and DX8000 DVRs
- Network bandwidth throttling
- 10/100/1000 megabit ethernet port
- Multi-event recording schedules
- Multiple displays for live viewing or playback while recording
- 6X digital zoom on playback
- Pre-motion and pre-alarm recording
- On-screen PTZ control with positioning device programming capability
- Includes remote PC, Web, and handheld client software
- Pelco-engineered compression technology offering high-quality and small file sizes
- Local and remote administration, live, search, and playback viewing
- Individual camera channel configuration
- Single screen display of different cameras from various sites

- Dynamically adjustable frame rate and image quality for motion, alarm recording, and pre-alarm recording
- Pre-alarm recording up to 60 seconds (up to 15 minutes with optional 512 MB RAM upgrade)*
- Monitor system changes using activity logs
- User-friendly and highly intuitive graphical user interface (GUI)
- Local and remote software upgrade capabilities
- Multilevel password and user configuration
- Automatic image watermarking
- Multilanguage support (English, French, German, Italian, Polish, Portuguese, Russian, and Spanish)
- User-definable PTZ presets, patterns, and preset tours
- Display up to 36 local and remote cameras on a single screen (only in CIF)
- Print still images from video
- Export video and still images in multiple formats, including DX8100 native, AVI, ASF, BMP, TIFF, and JPEG
- DX8100 viewer included with video exports
- API facilitates development and integration of third-party applications
- Ability to configure any number of camera inputs for covert mode
- Scheduled backup

*Pre-alarm time estimate based on 16-channel recording at a resolution of 320 x 240 (CIF) and a frame rate of 5 ips.

MODELS

The DX8100 Series DVR is available in various model configurations. For example, the model number for a 32-channel system with 1000 GB storage, analog display, and audio input option is DX8132-1000MA. Typically, if an audio option is ordered, a 32-channel system comes with a 32-channel audio option. The model number for a customized system is specified differently. For example, if you ordered a 32-channel system with 1000 GB storage and an 8-input audio option the model numbers would be DX8132-1000 (32 video channels) and DX8108-AUD (8 audio inputs) respectively. For more information about ordering customized configurations, contact your Pelco sales representative.



Channels	Storage in GB	Options
8	250	M = MUX
16	500	A = Audio
24	750	
32	1000	
	1500	
	2000	
	2250	
	3000	

OPTIONAL ACCESSORIES

The table below describes DX8100 optional accessories. Refer to the documentation supplied with the optional accessories for installation instructions.

Table A. DX8100 Optional Accessories

Option Number	Description	Reference Documentation
DX8100-EXP	DX8100 16-channel expansion unit Kit	C2636M
DX8100-ISCI	DX8100 internal ultra 160 SCSI card	C2635M
DX8108-AUD	DX8100 8-channel audio input card	C2638M
DX8116-AUD	DX8100 16-channel audio input card	C2638M
DX81XP-UPG	Windows XP Embedded software upgrade for DX8100	C2666M
DX8100-512RAM	DX8100 memory upgrade from 512 MB to 1 GB	N/A
DX8108-MUX	DX8100 8-channel multiplexed analog output display card	C2665M
DX8116-MUX	DX8100 16-channel multiplexed analog output display card	C2665M
DX9200HDDI	External RAID storage expansion unit	C637M-B
DX81HDD250KIT	DX8100 SATA 250 GB upgrade	C2639M
DX81HDD500KIT	DX8100 SATA 500 GB upgrade	C2639M
DX81HDD750KIT	DX8100 SATA 750 GB upgrade	C2639M
KBD300A	KBD300A Universal keyboard (requires KBDKIT)	Refer to *Appendix F: Connecting a KBD300A Keyboard*
KBDKIT/KBDKIT-X	Remote keyboard wiring kit	Refer to *Appendix F: Connecting a KBD300A Keyboard*
VSI-PRO	AVE Video serial interfaces for ATM/POS	Refer to *Appendix G: Connecting ATM/POS Devices*

Parts List

DX8100 parts are listed as follows:

Qty	Description
1	Recorder
2	Power cords (1 USA standard and 1 European standard)
1	Keyboard
1	Mouse
1	Rack mounting kit 2 Rack ears 2 Rack handles 2 Chassis brackets 2 Adjustable support rails (front) 2 Adjustable support rails (rear) 6 Screws, 8-32 x 0.375-inch, Phillips, pan head with lock washers 16 Screws, 10-32 x 0.375-inch, Phillips, flat head 4 Screws, 10-32 x 0.750-inch, Phillips, pan head with nylon washers 10 Screws, #4, sheet metal, pan head, Phillips, black, 0.375-inch
2	Keys in slot 2 and the main Capture card moved to slot 3.
1 or 2	Alarm input terminal blocks (green) 1 terminal block provides 8 alarm inputs 2 terminal blocks provide 16 alarm inputs
1 or 2	Relay output terminal blocks (blue) 1 relay output terminal block provides 8 relay outputs 2 relay output terminal blocks provide 16 relay outputs
1	Quick Start Installation guide
1	Quick Start Operations guide
1	Installation manual
1	DX8100 Recovery DVD
1	DX8100 Resource DVD Includes DX8100 applications for the PC Client, Client Emergency Agent, Native Viewer, and Mobile Client; and both client and server operation/programming manuals
1	Nero® Express CD burning software, v 7.2.3.3

Application Examples

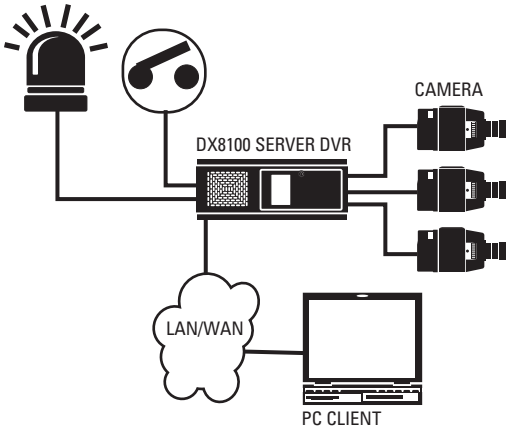

Figure 1. System with Single DX8100

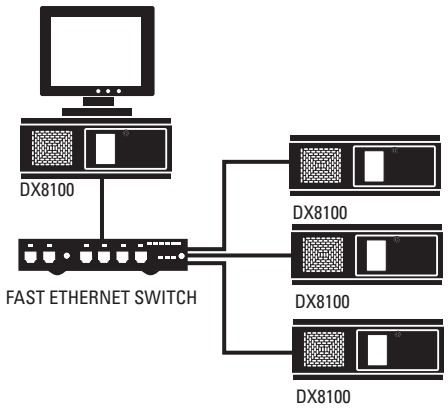

Figure 2. System with Multiple DX8100s

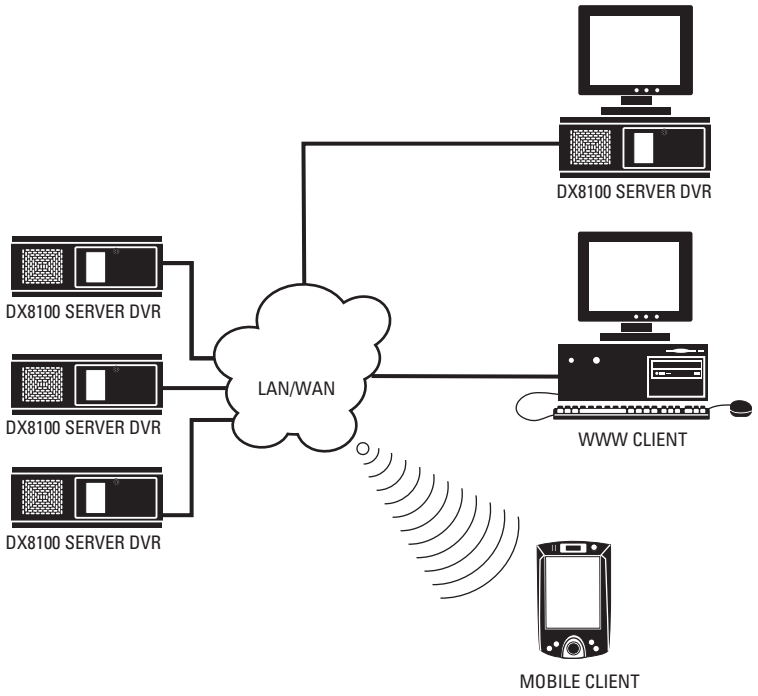

Figure 3. System with Multiple DX8100s and Multiple Clients

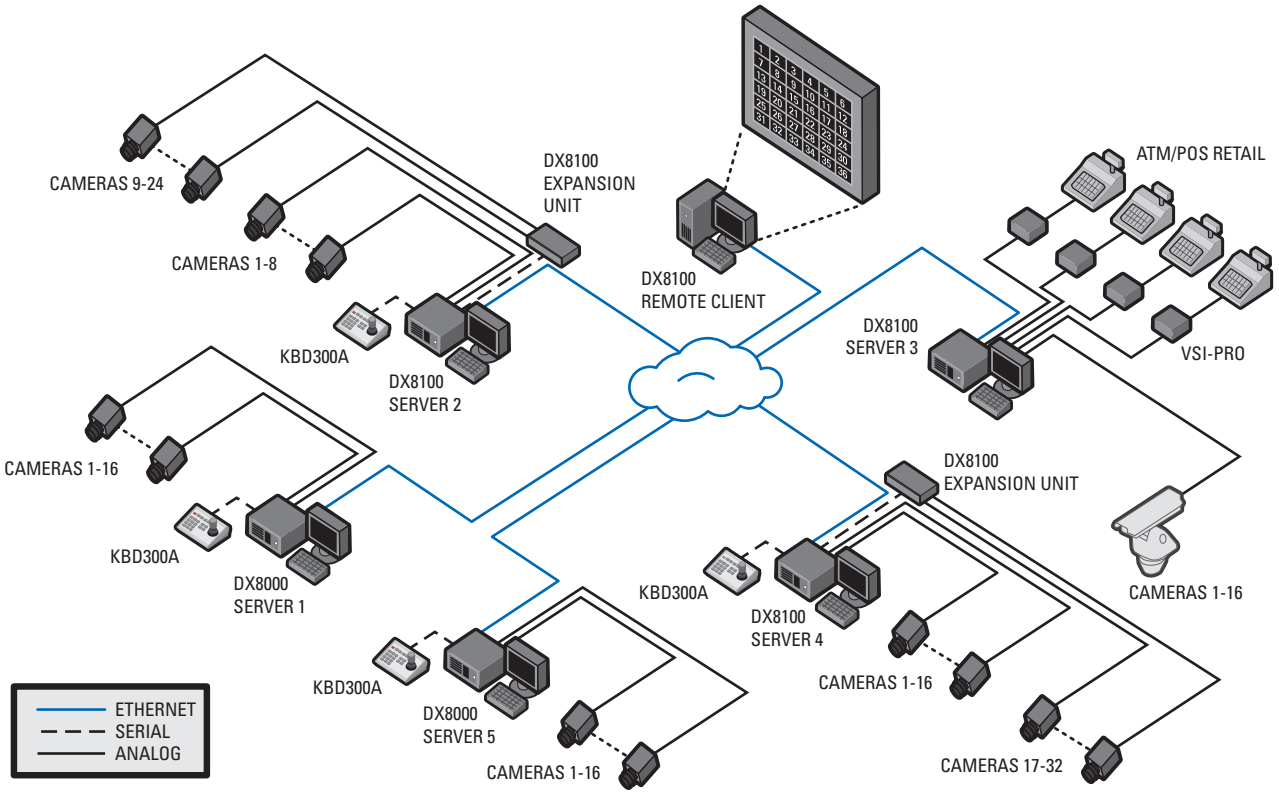

Figure 4. Network with DX8000, Third-Party Domes, ATM/POS, Using KDB300A Keyboard

Refer to the Operation/Programming manual for instructions on how to operate and program the DX8100 Series DVR.

Equipment Rack Mounting

To install the unit in an equipment rack:

1. Remove the 12 screws fastening both left and right side plates to the unit. Save the side plates and screws for possible future use.

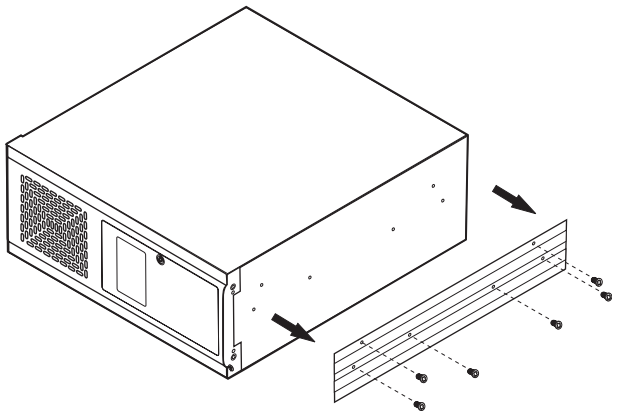

Figure 5. Remove Left and Right Side Plates

2. Attach the handles to the rack ears using the four provided 10-32 x 0.375-inch Phillips screws. Refer to Figure 6.
3. Using two of the supplied #4 sheet metal Phillips 0.375-inch pan head screws for each side, attach the rack ears to the unit.

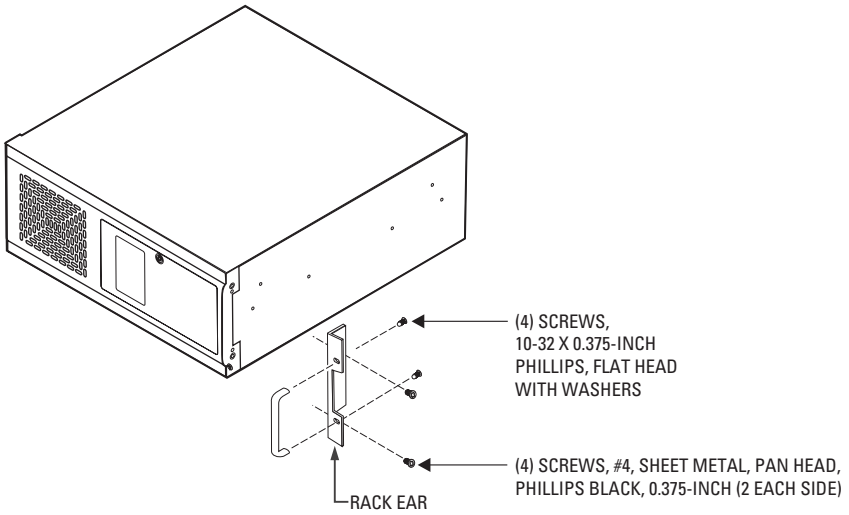

Figure 6. Attaching Rack Ears and Handles

4. Using the remaining six #4 sheet metal Phillips 0.375-inch pan head screws, attach the two chassis brackets to the left and right sides of the unit. Refer to Figure 7.
5. Assemble both sets of front and rear mounting rails using three 8-32 x 0.375-inch pan head screws and locking washers for each side.
6. Using six of the 10-32 x 0.375 Phillips flat head screws per side, attach the assembled mounting rails to a 19-inch (48.26 cm) equipment rack or console.
7. Place the unit onto the mounting rails. It should slide in and out of the rack easily. This step may require two persons to lift and slide the unit into place.
8. Fasten the rack ears to the equipment rack using the four 10-32 x 0.750-inch pan head screws and nylon washers.

   You should allow at least one rack unit (1.75 inches or 4.44 cm) of spacing between units. Slots and openings in the cabinet provide ventilation and prevent the unit from overheating. Do not block these openings. Never place the DVR near or over a radiator or heat register. Do not place it in a built-in installation, such as a rack, unless proper ventilation is provided.

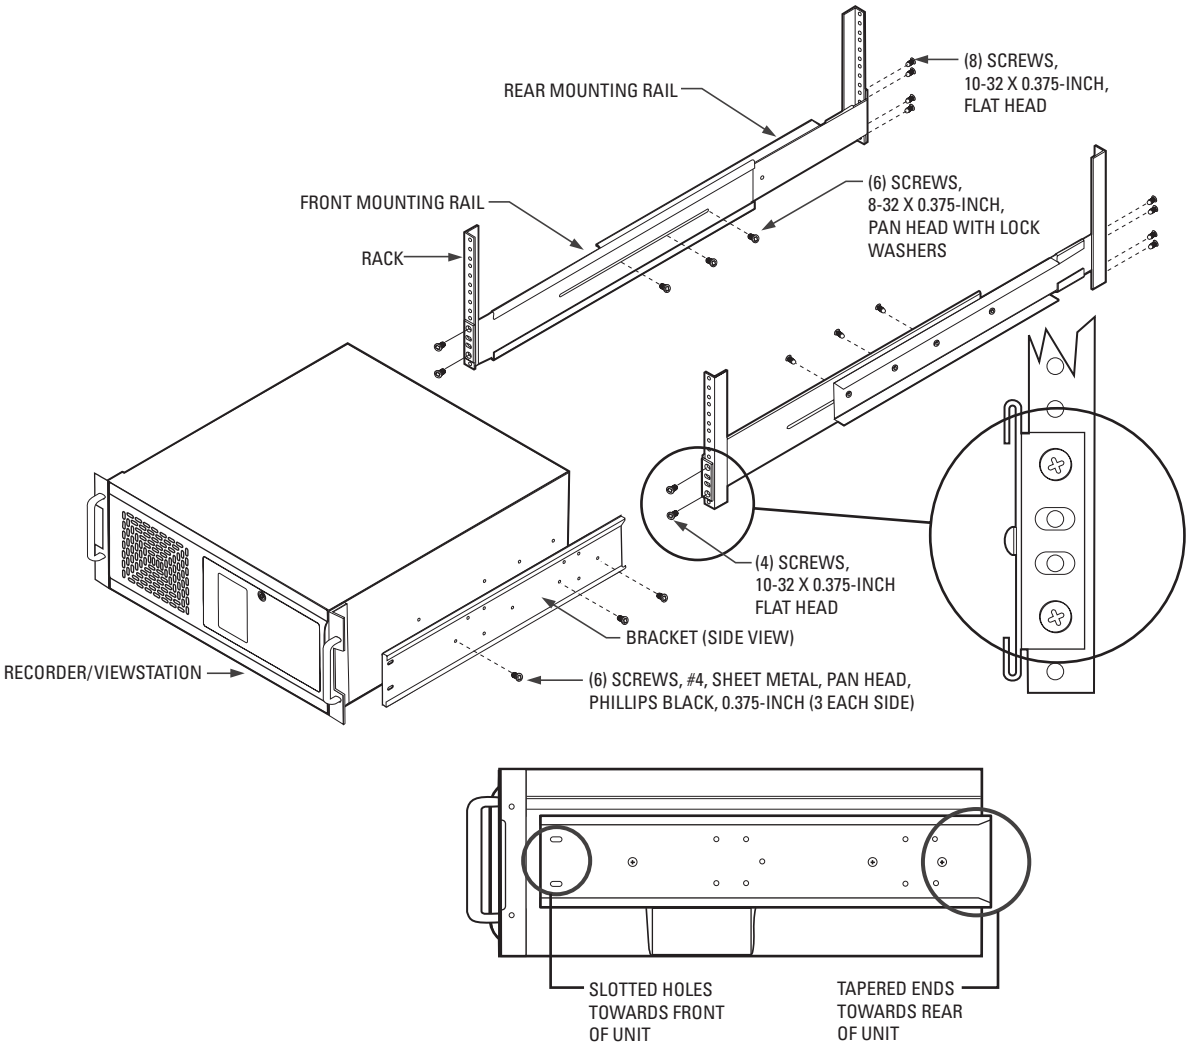

Figure 7. Rack Mount Installation

Back Panel Layout

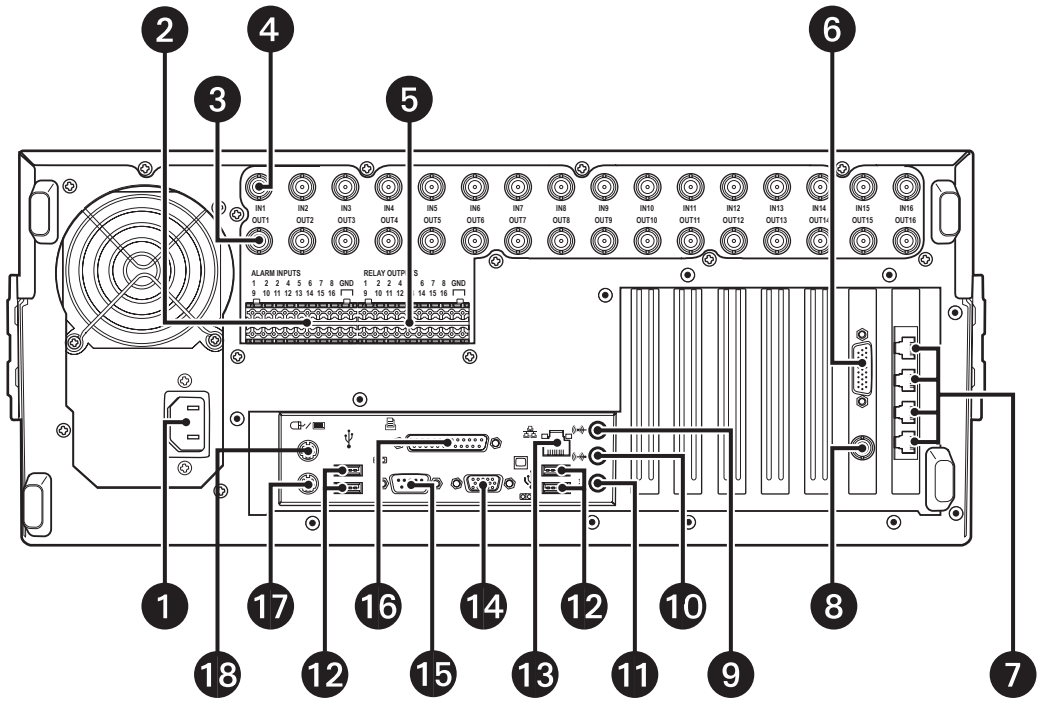

Figure 8. Back Panel Layout

1. **Autoranging AC Power Input (voltage range between 100 VAC and 240 VAC, 50/60 Hz)**
2. **Alarm Inputs:** 16 normally closed inputs
3. **Camera Outputs:** 8 or 16 BNC camera outputs
4. **Camera Inputs:** 8 or 16 BNC camera inputs
5. **Relay Outputs:** 16 normally open outputs
6. **Audio Inputs (optional)**: 8 or 16 channels
7. **Four RJ-45 Extended Peripheral Connectors (RS-422/RS-485 compliant)**
8. **BNC Programmable Analog Display Output**
9. **Audio Input (Standard):** One miniature phone jack for line in (disabled)
10. **Audio Output (Standard):** One miniature phone jack for audio output
11. **Audio Input (Standard):** One 2-channel (right/left) miniature phone jack for line in (disabled)
12. **High-Speed USB 2.0 Ports:** two USB ports on front of unit and four on rear of unit
13. **Ethernet Adapter Port:** 100 Mbps port
14. **VGA Monitor Output:** 15-pin output
15. **9-Pin Serial Port:** COM1
16. **LPT1 Printer Port:** 25-pin port
17. **Keyboard (PS/2) Input**
18. **Mouse (PS/2) Input**

Hardware Setup

BASIC CONNECTIONS

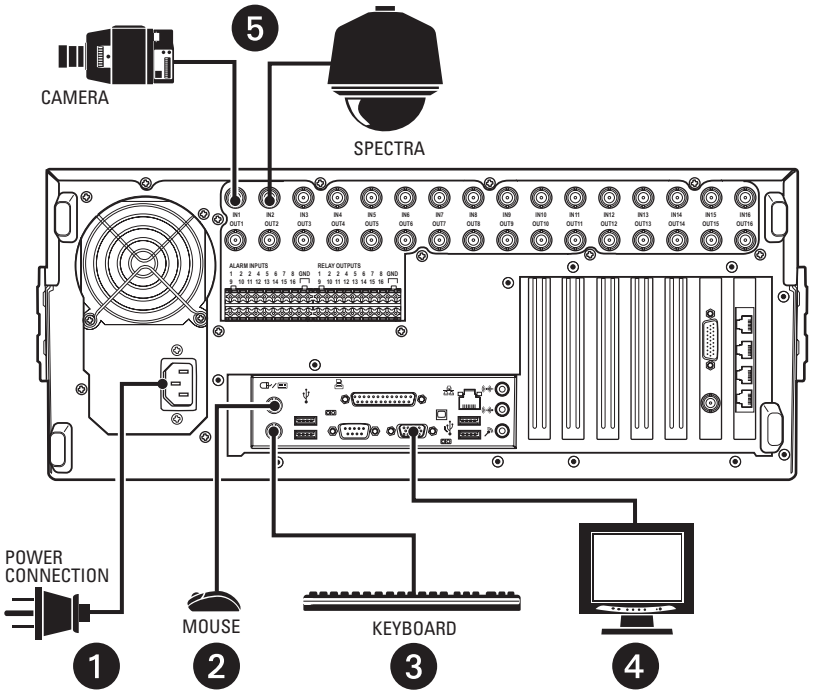

Figure 9. Basic Connections

Make the following connections on the rear of the recorder. Refer to Figure 9.

1. Connect the appropriate power cord to the back of the unit and to a power source.

   The DX8100 contains an autoranging power supply. It is recommended that the recorder be connected to an uninterruptible power supply (UPS) capable of supplying 2 A for 120 VAC power systems or 1 A for 230 VAC power systems.

2. Connect the mouse to the top PS/2 input.
3. Connect the keyboard to the bottom PS/2 input.
4. Connect a VGA monitor (not supplied).
5. Connect the cameras to the BNC connectors. Refer to Table B for video coaxial cable requirements. Connect power to the cameras.

Table B. Video Coaxial Cable Requirements

Cable Type*	Maximum Distance
RG59/U	750 ft (229 m)
RG6/U	1,000 ft (305 m)
RG11/U	1,500 ft (457 m)

*Minimum cable requirements:

75 ohms impedance

All-copper center conductor

All-copper braided shield with 95% braid coverage

When connecting cameras using these types of cable, use a patch panel. Do not connect these cables directly to the DX8100.

NETWORK SETUP

The DX8100 Series DVR supports remote viewing and administration in client-server and peer-to-peer configurations. The DX8100 is compatible with the TCP/IP protocol and Fast Ethernet (1000BaseT) network connection. Consult your network administrator before installing the DX8100 to avoid possible network conflicts.

For TCP/IP access, connect the DX8100 to a 100 Mbps or 1 Gigabit, switched Ethernet network. Use standard Cat5 or better UTP cable with RJ-45 connectors.

To configure the DX8100 hardware for network access:

1. Connect one end of the UTP cable to the network port on the back panel of the DX8100 as shown in Figure 10.
2. Connect the other end of the UTP cable to an available port on a standard Fast Ethernet switch.

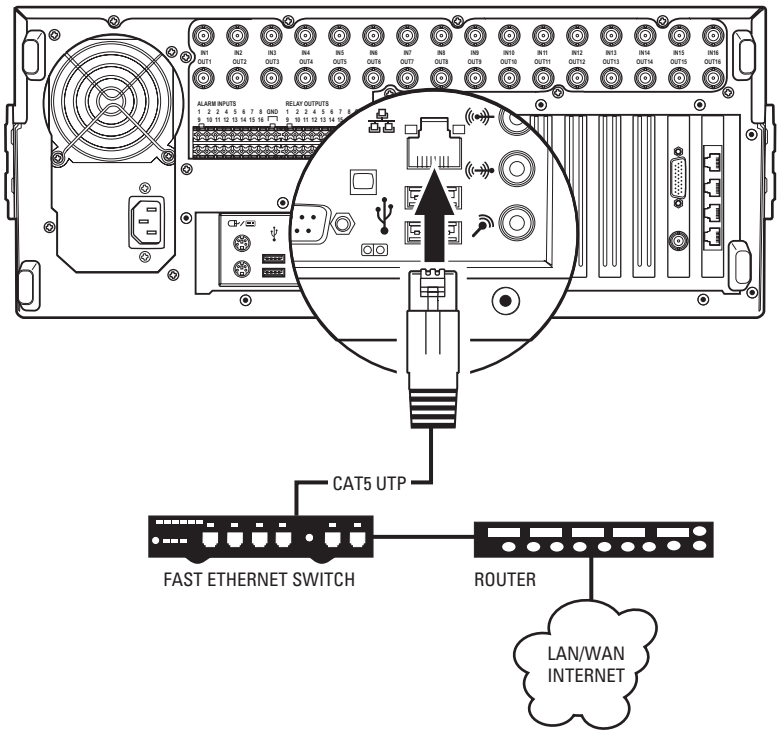

Figure 10. LAN/WAN Cable Connection

RS-422/RS-485 COMMUNICATION PORT SETUP

The DX8100 Series DVR features four RS-422/ RJ-45 communication ports. All ports are compatible with both RS-422 and RS-485 interface standards. Each port can communicate with and control a variety of ATM/POS, PTZ, third-party dome devices, and Pelco's Spectra™ III dome enclosures and Esprit® positioning systems.

The example configuration illustrated in Figure 11 shows a DX8100 connected directly to up to four PTZ devices and indirectly to up to 16 devices through Pelco's CM9760-CDU-T code distribution unit. Figure 12 illustrates the connection of a variety of RS-422/RS-485 compatible devices including the DX8100. This example highlights the P and D protocol data merging capability of Pelco's CM9760-DMR data manager.

To operate properly, devices must be compatible with either the RS-422 or RS-485 interface standards and must be able to communicate using Pelco's P, D, or Coaxitron® protocols, or third-party dome protocols.

1. Using unshielded twisted pair (UTP) cable, connect up to four RS-422/RS-485 compatible devices to the RJ-45 connector jacks provided on the rear panel of the unit.

   You should use 22 or 24 gauge UTP cable. Category 5 UTP is recommended for cable runs greater than 400 feet.

2. Set the communication parameters for both the DX8100 and the PTZ device. Communication parameters are baud rate, parity (odd or even), number of parity bits, number of data bits, and number of stop bits.

   Refer to *RS-422/RS-485 Communication Port Software Configuration* for instructions on setting up your DVR's communication parameters. Refer to the documentation included with your PTZ device for instructions on configuring its communication settings.

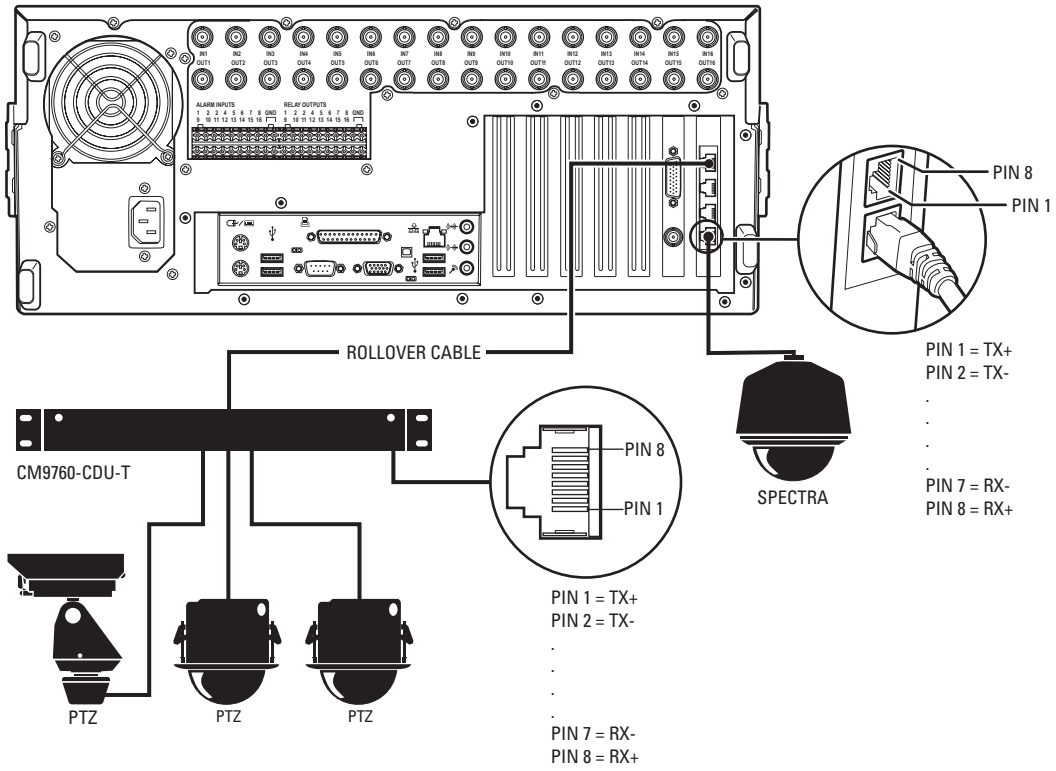

Figure 11. RS-422/RS-485 Configuration Example 1

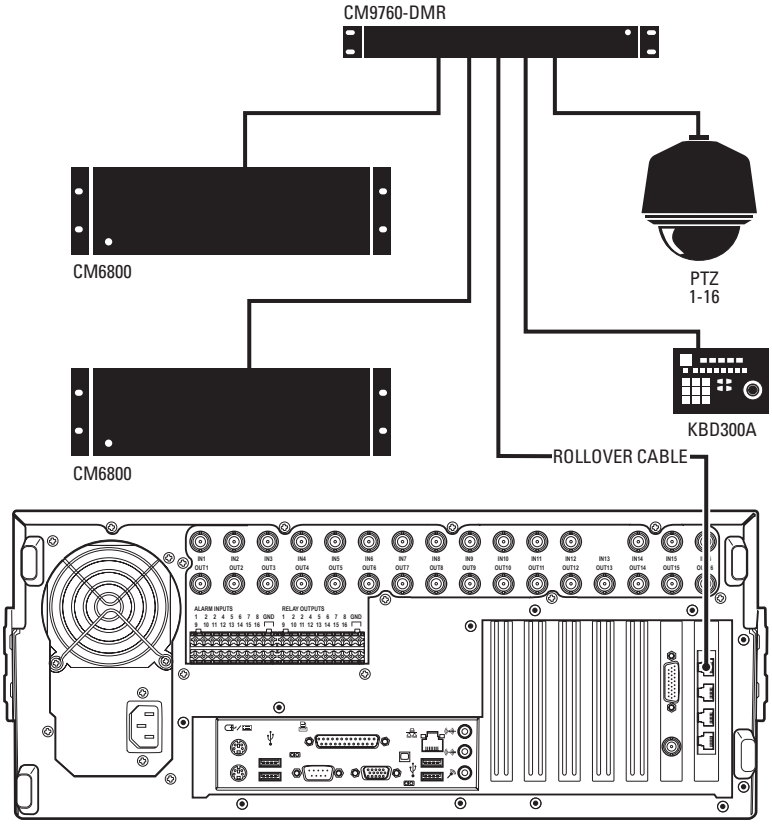

Figure 12. RS-422/RS-485 Configuration Example 2

Different types of devices may require alternative cable wiring schemes. Wiring schemes commonly used by Pelco products include straight and rollover types. Refer to the documentation included with your PTZ device to ensure that cables and connectors are wired appropriately. Figure 13 illustrates straight and rollover cable wiring schemes.

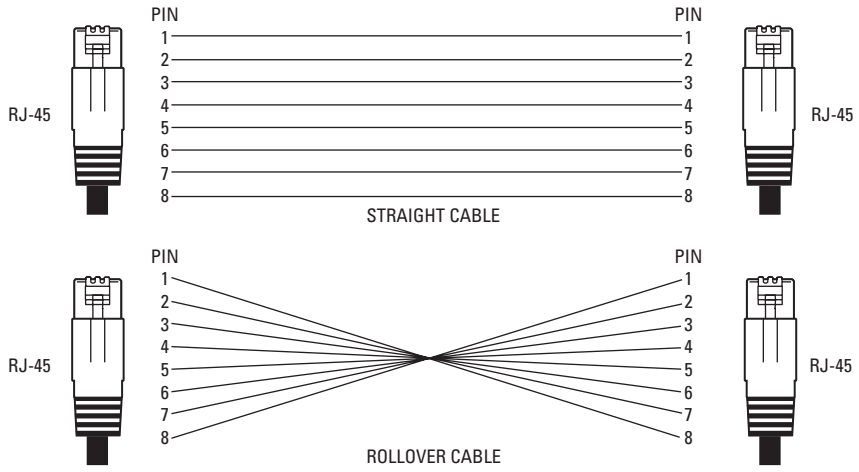

Figure 13. Cable Wiring Schemes

ALARM INPUT INSTALLATION

The DX8100 has either 8 or 16 dry contact alarm inputs, depending on your system's configuration. Each input is programmed to function as either a normally open or normally closed circuit.

To wire an alarm input:

1. Insert the green terminal blocks into the alarm sockets on the back panel of the recorder.
2. Connect one wire from the source device to one of the sensor input terminals 1 through 16.
3. Connect a second wire from the source device to a GND terminal.
4. Refer to the DX8100 Operation/Programming manual for information on how to program the alarm inputs.

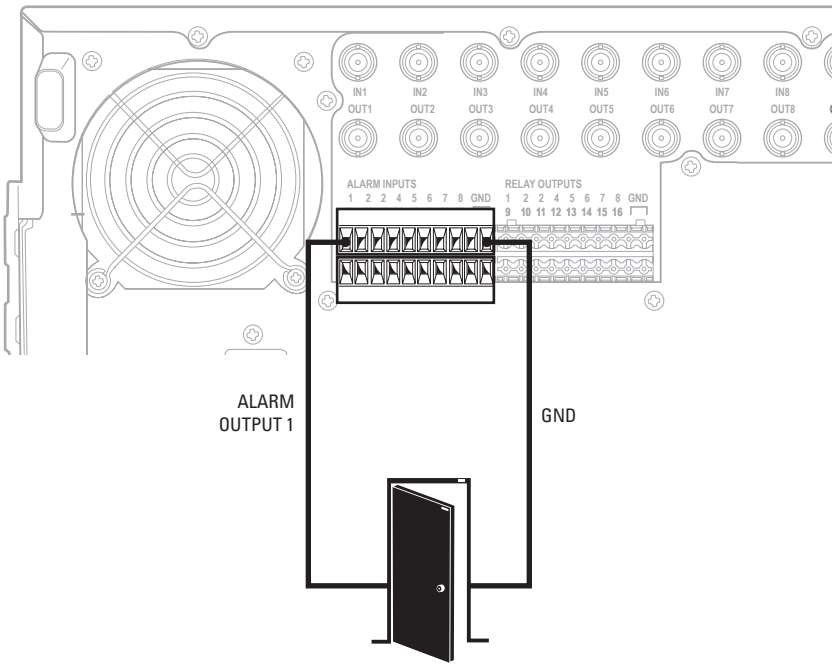

Figure 14. Alarm Terminal Installation

RELAY OUTPUT INSTALLATION

The DX8100 has either 8 or 16 relay outputs, depending on your system's configuration. Each output is programmed to function as either a normally open or normally closed circuit. A signal from a relay output will operate the device connected to the output. The maximum relay power rating is 120 VAC, 0.5 A; 24 VDC, 1 A.

To wire a relay output:

1. Insert the blue terminal blocks into the relay sockets on the back panel of the recorder.
2. Connect one wire from the device to one of the relay output terminals 1 through 16.

   Relay outputs do not have to correspond numerically to alarm inputs. All sensor input and relay output actions can be linked through programming.
3. Connect a second wire from the relay device to a GND terminal.
4. Refer to the DX8100 Operation/Programming manual for information on how to program relay outputs.

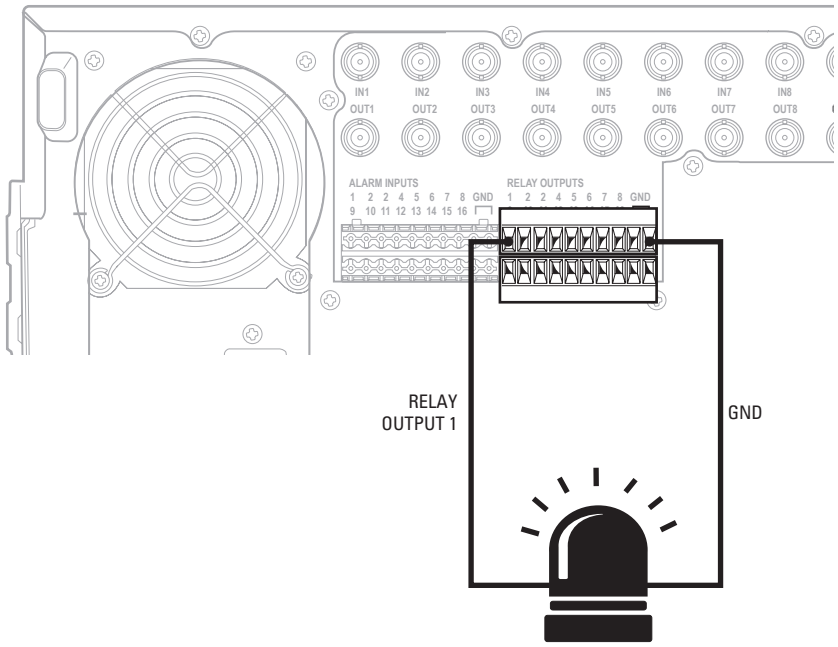

Figure 15. Relay Terminal Installation

Software Setup

STARTING THE UNIT

Once the system has been installed and basic connections have been made, open the front panel of the DVR. Press the power switch. Wait while the unit starts (this may take several minutes).

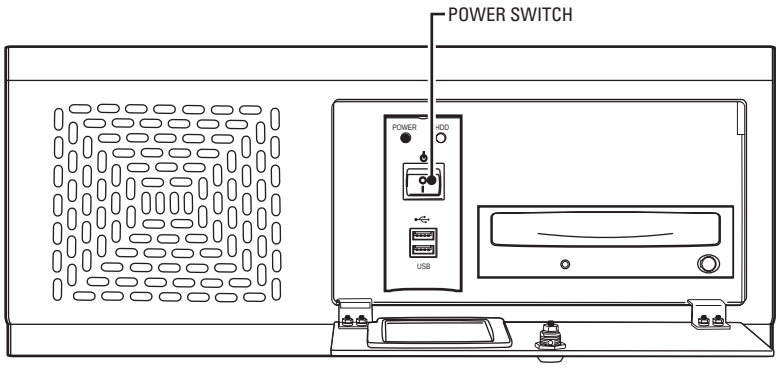

Figure 16. Front Panel and Power Switch

⚠ **WARNING:** Be sure to put on gloves before removing or inserting the filter.

LOGGING IN FOR THE FIRST TIME

To access the features of the DX8100 Series DVR, each user must log in with a valid user name and password. User names and passwords are case sensitive.

There are four user access levels or groups that can be configured on the DX8100. Access levels range from the Administrator group, with the most rights and privileges, to the Restricted group, with the least rights and privileges. For information about configuring access levels, refer to the *Definition of User Access Levels* section of the DX8100 Operation/Programming manual for information on user group rights and permissions.

The DX8100 comes equipped with two built-in user accounts. Each time the unit is started, a default user account called "Guest" is automatically activated. The Guest account is granted only limited access to the DX8100 and is allowed no access to system configuration utilities. A second built-in user account, named "Admin", provides full access to the operations and configuration features of the DX8100.

For security reasons, you are prompted but not required to change the Admin password immediately after logging in for the first time. Passwords must be between six and ten characters long and cannot include spaces or special characters. Follow the directions on the next page to change the Admin password.

To log in with the Admin account:

1. Click File > User Log-in.
2. Enter **Admin** in the User name field and **Admin** in the Password field.
3. Click OK.

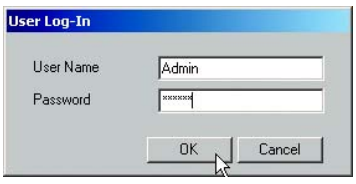

Figure 17. User Log-in Dialog Box

If you are logging in for the first time, the system prompts you to complete the mandatory password change for the Admin account. In this case, the Set Admin Password dialog box opens automatically. You must change the password for the Admin account. If you want to keep the default password, click cancel. However, because of security reasons, Pelco recommends that you change the password.

Only users with Administrator and Power User accounts are allowed access to DX8100's setup functions.

To complete the prompted password change for the Admin account:

1. Enter a new password in the New Password field.
2. Enter the password again in the Confirm Password field to confirm the password.
3. Click OK.

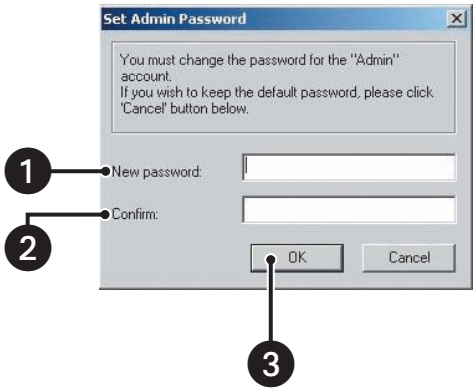

Figure 18. Set Admin Password Dialog Box

SHUTTING DOWN

You must have Power User or Administrator access to shut down the DX8100. For more information about user security levels, refer to the DX8100 Operation/Programming manual. You must also have a Windows password to shut down the DX8100. For information on the Windows default password, refer to the Important Security Information for System Administrators guide.

To shut down the DX8100 Series DVR:

1. Go to File > Exit.
2. Select Shut down.
3. Click OK.

Figure 19. Shut Down Dialog Box

EXITING TO WINDOWS OPERATING SYSTEM

Some of the steps involved in the configuration of a DX8100 Series DVR require exiting to the operating system. You must have Administrator access to exit to the Windows operating system. For more information about user security levels, refer to the DX8100 Operation/Programming manual. You must also have a password to exit from the DX8100 application to the Windows operating system. For information on the Windows default password, refer to the Important Security Information for System Administrators guide.

To exit the DX8100 application and log into the Windows operating system:

1. Go to File > Exit.
2. Select Exit to Windows. The Shut down dialog box opens.

3. Click OK.

Figure 20. Shut Down Dialog Box

The Log On to Windows dialog box opens.

4. Enter the Windows password and click OK. The system logs you into the Windows operating system.

SETTING THE SYSTEM LANGUAGE

The DX8100 supports eight languages. The DVR comes from the factory configured for English (United States). To configure the system properly for a language other than English, you must change the regional setting in the Windows operating system and the language setting of the DX8100. The following regional settings are available for the DX8100:

- English (United States)
- French (France)
- German (Germany)
- Italian (Italy)
- Polish
- Portuguese (Brazil)
- Russian
- Spanish (Spain)

English (United States) is the default setting.

CONFIGURING THE REGIONAL SETTING IN THE WINDOWS OPERATING SYSTEM

In the example below, the location is changed from English (United States) to Spanish (Spain).

1. Exit the DX8100 application and return to the Windows operating system. Refer to *Exiting to Windows Operating System*.
2. Click Start > Settings > Control Panel. The Control Panel appears. Double-click Regional Options.

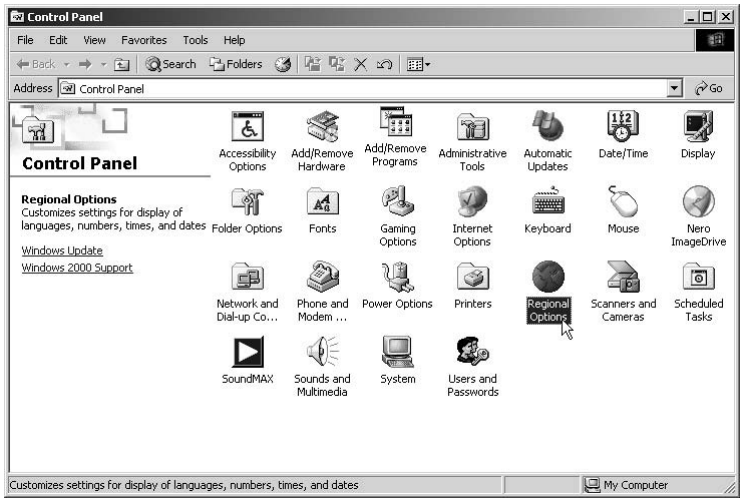

Figure 21. Control Panel with Regional Options Selected

3. The Regional Options dialog box opens.
4. Click the arrow to open the location drop-down list.
5. Change the location to Spanish (Spain).
6. Click Apply.
7. Click Set Default.

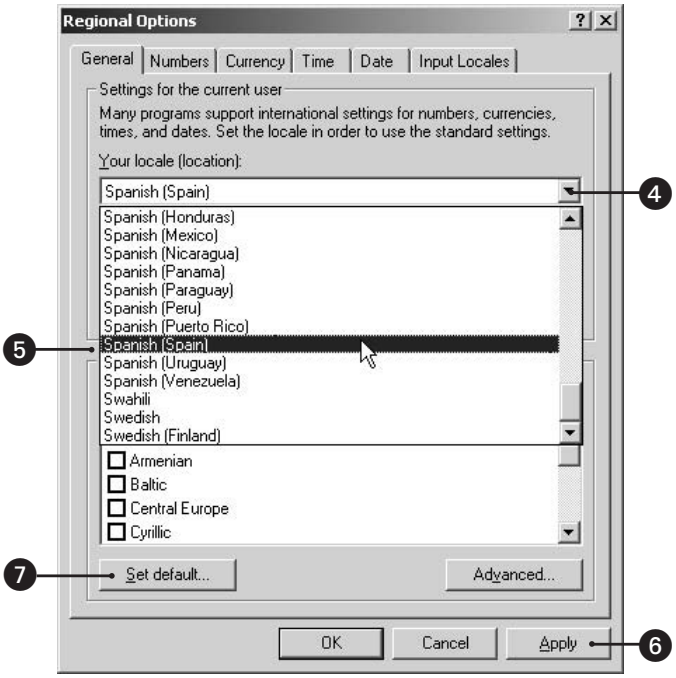

Figure 22. Regional Options Dialog Box

8. The Select System Locale dialog box opens. Select "Spanish (Spain)" from the drop-down box.
9. Click OK.

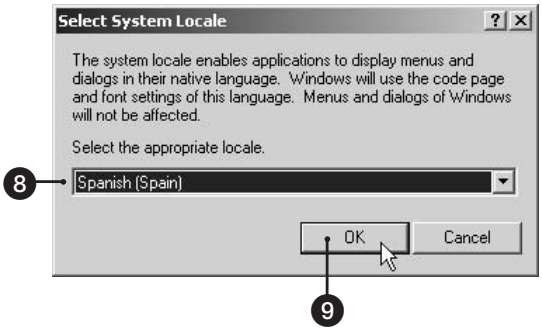
Select System Locale
The system locale enables applications to display menus and dialogs in their native language. Windows will use the code page and font settings of this language. Menus and dialogs of Windows will not be affected.
Select the appropriate locale.
Spanish (Spain)
OK
Cancel
8
9

Figure 23. Select System Locale Dialog Box

10. The Regional Options dialog box opens. Click Apply.

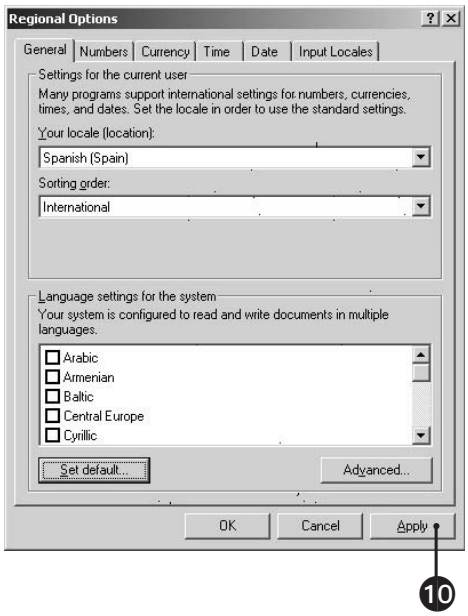

Figure 24. Regional Options Dialog Box

11. The General dialog box opens. Click Yes.

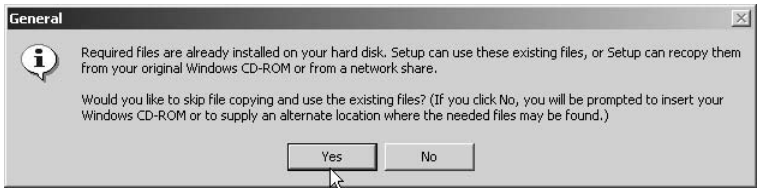
General
Required files are already installed on your hard disk. Setup can use these existing files, or Setup can recopy them from your original Windows CD-ROM or from a network share.
Would you like to skip file copying and use the existing files? (If you click No, you will be prompted to insert your Windows CD-ROM or to supply an alternate location where the needed files may be found.)
Yes
No

Figure 25. General Dialog Box

12. The Change Regional Options dialog box opens. Click Yes.

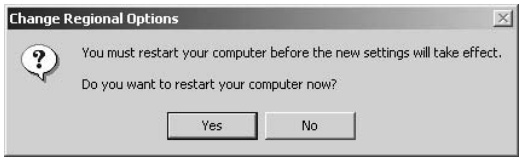
Change Regional Options
You must restart your computer before the new settings will take effect.
Do you want to restart your computer now?
Yes
No

Figure 26. Change Regional Options Dialog Box

The new settings take effect after the computer restarts. The DX8100 will support Spanish settings for numbers, currency, times and dates.

Follow these same steps to change the location back to English (United States) or to select another location.

CONFIGURING THE LANGUAGE SETTING OF THE DX8100

You must have Administrator or Power User access to configure the language setting of the DX8100.

1. Start the DX8100 if it is not already running, and then log in as a Power User or Administrator.
2. Click .
3. Click . The System page is displayed.
4. Select the appropriate language from the drop-down box.
5. Click Apply.

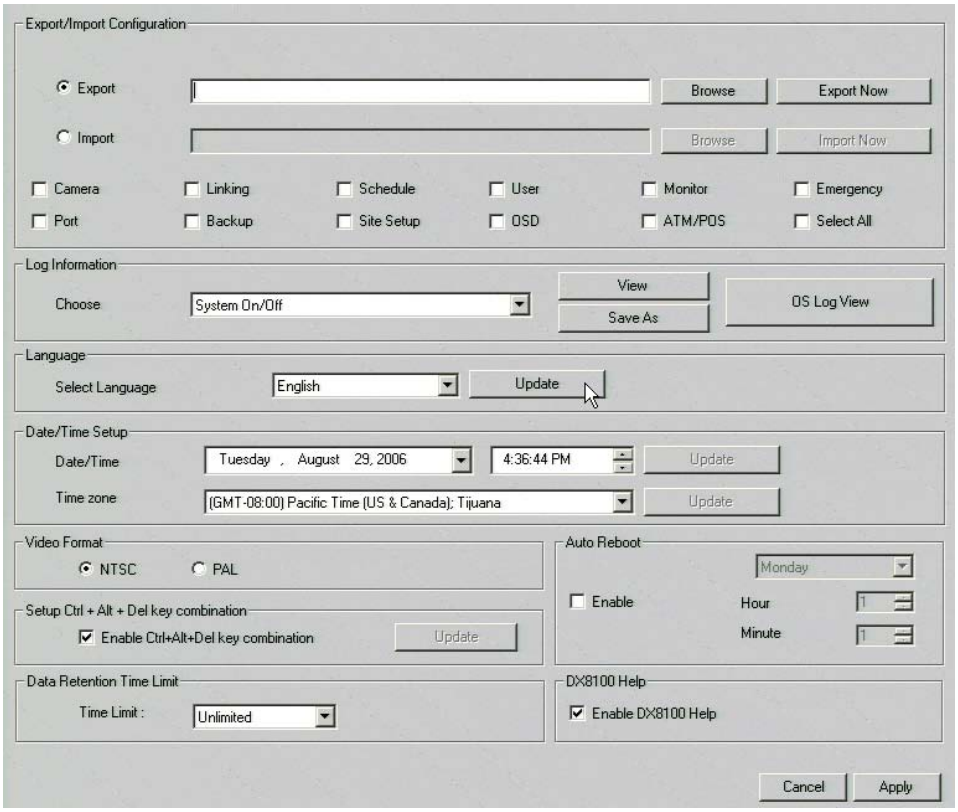

Figure 27. System Page: Selecting the Language

SETTING THE SYSTEM TIME

Time should be set on the DX8100 before it is put into use. Setting the internal clock for each DVR on the network ensures that each accurately reflects the local time.

To set system time:

1. Click .
2. Click . The System page is displayed.
3. From the Date/Time drop-down box, select the current month, day, and year.
4. Select the current time.
5. Click Update.
6. Select the correct time zone from the drop-down box.
7. Click Update.
8. Click Apply.

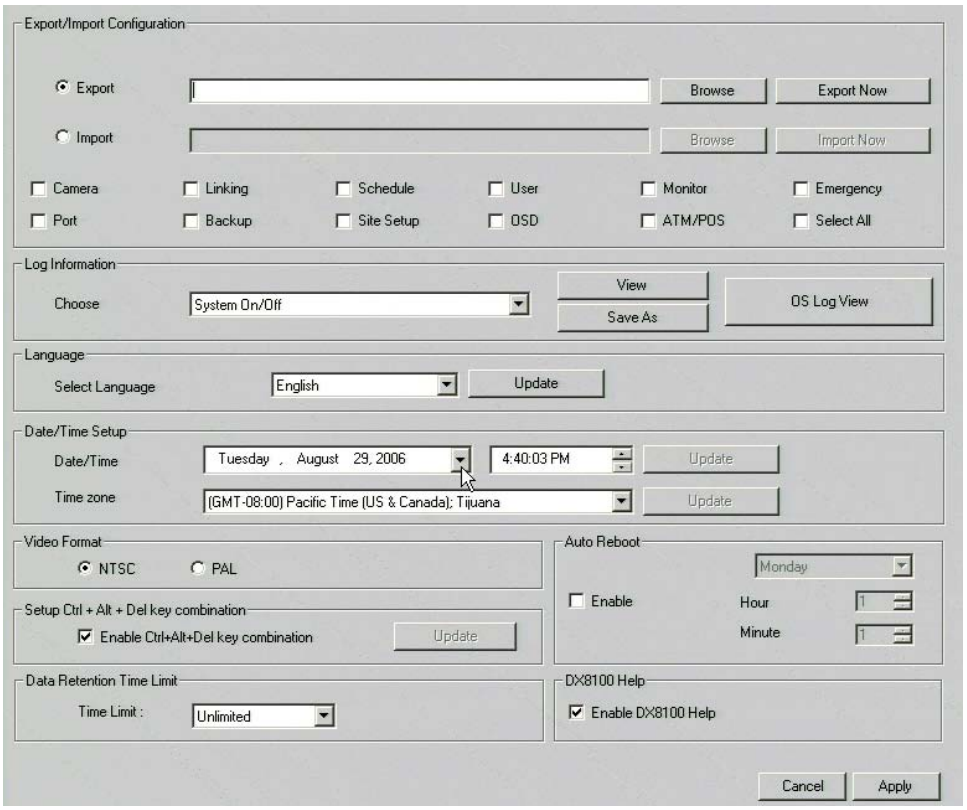

Figure 28. Setting the System Time

ENABLING AND USING CTRL+ALT+DEL

Enabling the Ctrl+Alt+Del key combination allows you to open the Windows Task Manager dialog box to perform Windows system administration tasks. To complete the procedure, you must be logged on to the DX8100 as an administrator or a member of the administrators group on a computer that is part of a network domain.

NOTE: The DX8100 keyboard is remapped. To see which keys replace the Ctrl and Alt keys, refer to the Important Security Information for System Administrators guide.

To enable the Ctrl+Alt+Del key combination:

1. Click .
2. Click . The System page is displayed.
3. From the Setup Ctrl + Alt + Del key combination area, click the Enable Ctrl+Alt+Del key combination selection check box.
4. Click Apply.
5. Reboot the DX8100.

USING CTRL+ALT+DEL

You must enable the Ctrl + Alt + Del key combination and verify your actual keyboard mapping. In some cases, the DX8100 keyboard is remapped and the actual Ctrl and Alt key function is assigned to other keys. For information on which keys replace the Ctrl and Alt keys, refer to the Important Security Information for System Administrators guide.

Ctrl+Alt+Del allows you to access the Windows Task Manager dialog box from within the DX8100 shell. When you exit the Windows environment, you are returned to the DX8100 shell. In this case, you do not have to log back into the DX8100.

To access the Windows Task Manager dialog box:

1. Press the assigned keyboard keys that implement the Ctrl + Alt + Del function. The Windows Security dialog box opens.
2. In the Windows Security dialog box, click Task Manager. The Windows Task Manager window opens.

To return to the DX8100 shell without rebooting the DX8100, exit the Windows Task Manager dialog box.

NETWORK SOFTWARE CONFIGURATION

Using the TCP/IP protocol, up to five DX8100 Series DVRs can be networked together for remote viewing and management. In addition, up to five simultaneous PC, web, and mobile clients can connect to each DVR. The DX8100 Series DVR supports both static IP addressing and dynamic addressing through Dynamic Host Configuration Protocol (DHCP). Consult your network administrator for more information regarding IP address configuration.

The system must be turned on, connected to a network, and you must be logged in with either Power User or Administrator access to configure network software settings. You must reboot the DVR for any network configuration changes to take effect.

To begin the network setup process:

1. Click .
2. Click . The Network page is displayed.
3. Click the Network tab if it is not already visible.
4. Enter a new name for your DVR in the Site Name field. (Site names can be up to 30 characters in length. The default site name is DX8100.)

5. Enter a unique system ID for your DVR in the System ID field. (System IDs must start with a letter, must be 15 characters or less, and cannot include spaces or special characters.)

   Your DVR's site name is used to identify your system to clients and other DX8100 servers. Your DVR's system ID is used to uniquely identify your system on a local area network (LAN). System IDs are required to prevent possible conflicts with other network devices.

6. Proceed to the steps for setting up DHCP or Static IP addressing in the following sections.

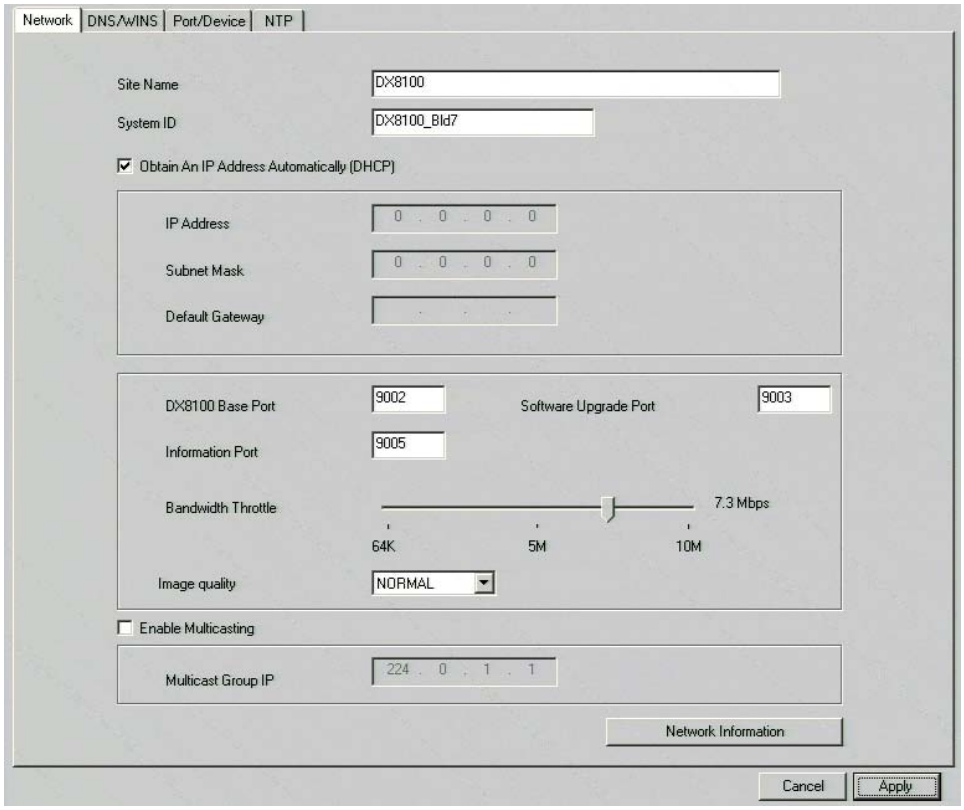

Figure 29. Network Setup Page: Software Configuration

DHCP SETUP

Your network must support DHCP, and an active DHCP server must be present for dynamic addressing to work. Consult your network administrator for more information.

To configure the DVR to acquire a dynamic IP address through DHCP:

1. Click .
2. Click . The Network page is displayed.
3. Click the check box labeled Obtain An IP Address Automatically (DHCP).
4. Click Apply.

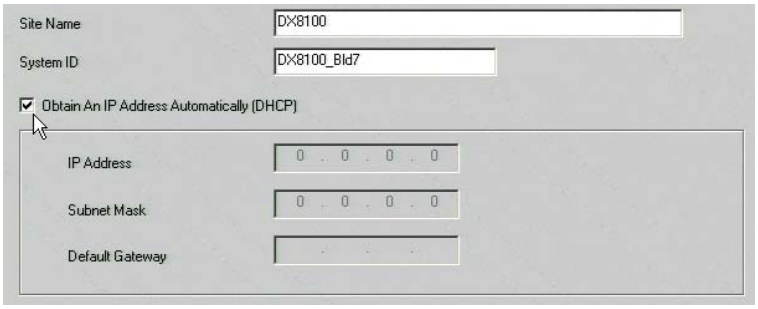

Figure 30. DHCP Setup

STATIC IP SETUP

To set up a static IP address, enter the following information in the fields provided. This information can be obtained from your network administrator.

1. Verify that the Obtain An IP Address Automatically (DHCP) check box is not selected.
2. Enter a unique IP address (for example, 10.0.0.101). The last three digits must be different for each recorder (for example, 101, 102, 103, and so forth).
3. Enter the subnet mask (for example, 255.0.0.0).
4. Enter the default gateway address (the IP address of the default router on your immediate network segment).
5. Click Apply.

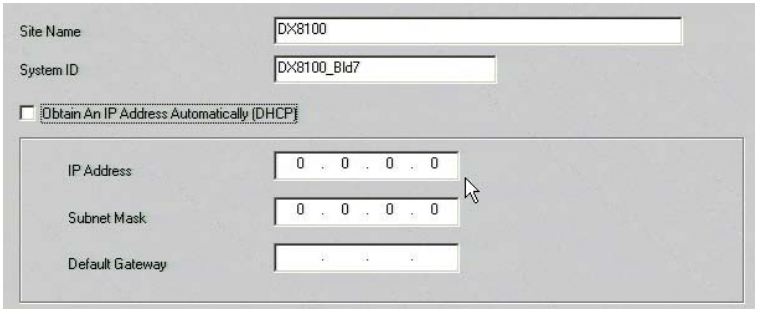

Figure 31. Static IP Setup

TCP/IP PORT AND BANDWIDTH THROTTLE SETUP

The DX8100 uses the TCP/IP networking protocol to communicate over LAN and WAN networks. TCP/IP uses logical network ports to organize data transmissions and to ensure that data packets are delivered to the proper application. For example, e-mail is traditionally delivered through TCP/IP port 25 and web pages through port 80. The ports assigned to direct video and control information into and out of the DX8100 are listed below in Table C, "TCP/IP Ports Used by the DX8100," on page 36.

You should keep port numbers set at their default values unless there is a known conflict with your existing network infrastructure. Consult your network administrator before changing any port information on the DX8100. Consult your network administrator when assigning or changing the port numbers. Make sure that ports are not blocked by a firewall.

Table C. TCP/IP Ports Used by the DX8100

Port Number	User configurable	Function
9002	Yes	Base port for transmission of video, audio, and interface data
9003	Yes	Software upgrade
9004	Yes	Emergency agent notification
9005	No	Information port
13900	No	Ping port

To configure TCP/IP ports and bandwidth throttle:

1. If necessary, enter a new base port number. (9002 is the default)
2. If necessary, enter a new software upgrade port. (9003 is the default)
3. Drag the network bandwidth throttle slider to the desired value. (Client bandwidth can be adjusted from a minimum of 256 Kbps to a maximum of 10 Mbps in increments of 256 Kbps.)
4. Click Apply.

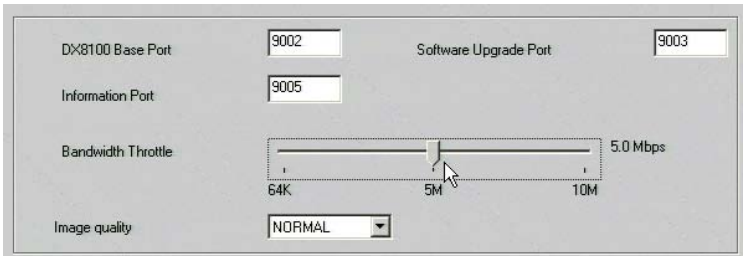

Figure 32. Base Port and Bandwidth Throttle Setup

ACCESSING NETWORK INFORMATION

Changes in network settings may not show up immediately in the IP Configuration status box. Allow up to 30 minutes for settings to update or reboot your DVR for settings to change immediately.

To access network information such as IP and default gateway addresses:

1. Click Network Information. The IP Configuration status box is displayed.

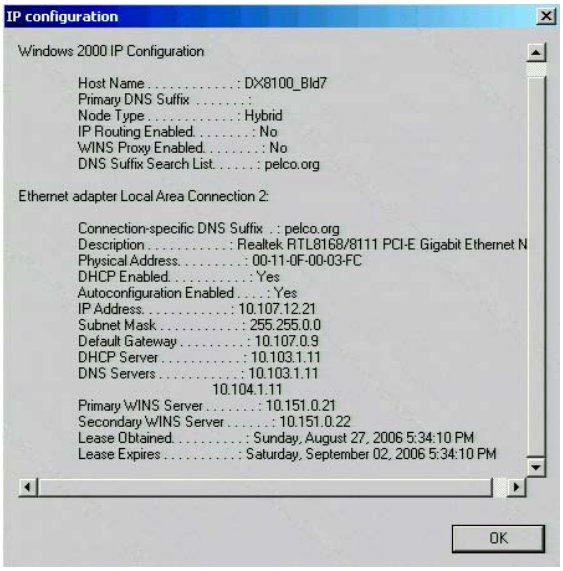
IP configuration
Windows 2000 IP Configuration
Host Name . . . . . : DX8100_Bld7
Primary DNS Suffix . . . . . :
Node Type . . . . . : Hybrid
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No
DNS Suffix Search List. . . . . : pelco.org
Ethernet adapter Local Area Connection 2:
Connection-specific DNS Suffix . : pelco.org
Description . . . . . : Realtek RTL8168/8111 PCI-E Gigabit Ethernet N
Physical Address. . . . . : 00-11-0F-00-03-FC
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
IP Address. . . . . : 10.107.12.21
Subnet Mask . . . . . : 255.255.0.0
Default Gateway . . . . . : 10.107.0.9
DHCP Server . . . . . : 10.103.1.11
DNS Servers . . . . . : 10.103.1.11
10.104.1.11
Primary WINS Server . . . . . : 10.151.0.21
Secondary WINS Server . . . . . : 10.151.0.22
Lease Obtained. . . . . : Sunday, August 27, 2006 5:34:10 PM
Lease Expires . . . . . : Saturday, September 02, 2006 5:34:10 PM
OK

Figure 33. IP Configuration Status Box

2. Click OK to return to the Network page.

DNS/WINS SETUP

If your network supports DNS or WINS services, follow the instructions below:

1. Click the DNS/WINS tab.
2. Do one of the following:
   a. If you are using dynamic IP addressing through a DHCP server, click the "Obtain DNS/WINS info from DHCP" check box.

   or

   b. If you are using static IP addressing, provide the following information in the appropriate fields. This information can be obtained from your network administrator.
      - Primary DNS server IP address.
      - Secondary DNS server IP address.
      - Primary WINS server IP address.
      - Secondary WINS server IP address.

3. Click Apply to update the configuration.

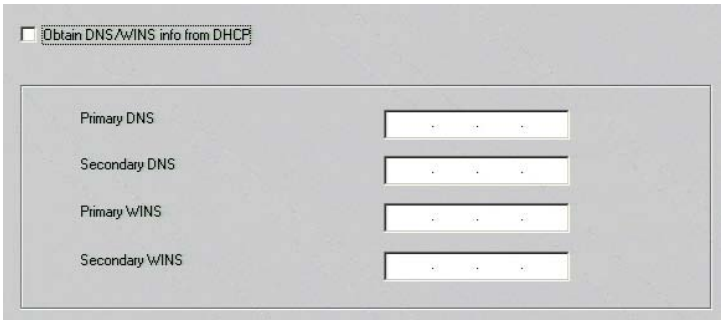

Figure 34. DNS/WINS Setup

RS-422/RS-485 COMMUNICATION PORT SOFTWARE CONFIGURATION

The system must be powered on, and you must be logged in as a Power User or Administrator to configure communication port settings.

To configure the RS-422/RS-485 ports in software:

1. Click .
2. Click .
3. Click the Port/Device tab. The Port/Device page is displayed.

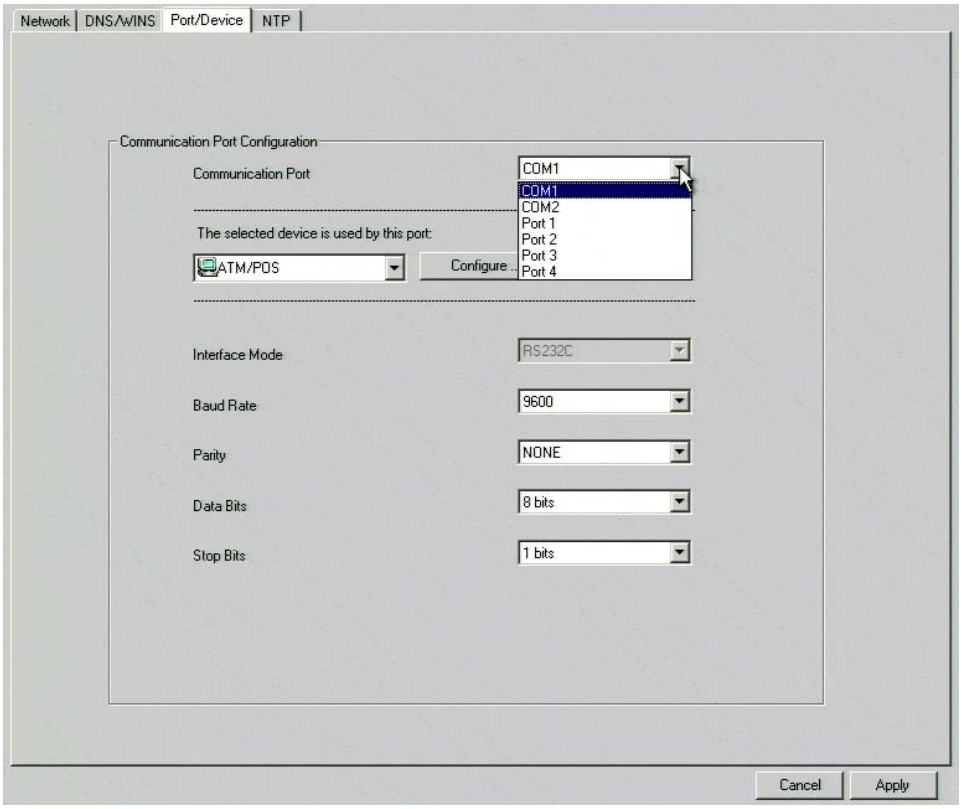

Figure 35. RS-422/RS-485 Port Setup Page

4. From the drop-down box, select Port 1–4. None is the default setting in the selected device drop-down box. In this case, the port settings drop-down boxes are not available.
5. In the selected device drop-down box, select a device. The port settings drop-down boxes are available.

6. Configure the port settings using the drop-down boxes provided. Refer to Table D. Refer to the instructions that came with your peripheral device for correct settings.

Table D. RS-422/RS-485 Port Settings

Setting	Options
Device	None or multiple devices
Interface Mode	RS-422 or RS-485
Baud Rate	1200, 2400, 4800, 9600, 19200, 28800, 38400, 57600, or 115200
Parity	None, Odd, or Even
Data Bits	5, 6, 7, or 8 bits
Stop Bits	1 or 2 bits

7. Click Apply.

CLIENT SOFTWARE SETUP

This section describes how to install and setup DX8100 client software.

RECOMMENDED SYSTEM REQUIREMENTS

The following are the minimum recommended system requirements for the DX8100 PC client, web client, and Emergency Agent software applications.

- Processor: Intel® Pentium® 4 with 2800 MHz minimum processor speed
- Memory: 256 MB of RAM
- Video: AGP VGA card with minimum of 64 MB video RAM, 1024 x 768 or 1280 x 1024 display resolution, 32-bit color, and DirectX® 8.1 or later hardware acceleration
- 500 MB of free disk space
- Monitor: SVGA or XGA with 1024 x 768 or 1280 x 1024 resolution, 32-bit color
- Operating System: Windows 2000 (SP4) or Windows XP Professional
- Microsoft Internet Explorer: Version 5.5 or later

INSTALLING THE PC CLIENT APPLICATION

1. Start the Windows operating system.
2. Close all programs, including any antivirus software.
3. Insert the DX8100 Resource CD into the DVD drive of your PC and wait for the window to open.

Figure 36. Resource CD Screen: PC Client Installation Option

4. Click Software. The DX8100 software installation options are displayed.

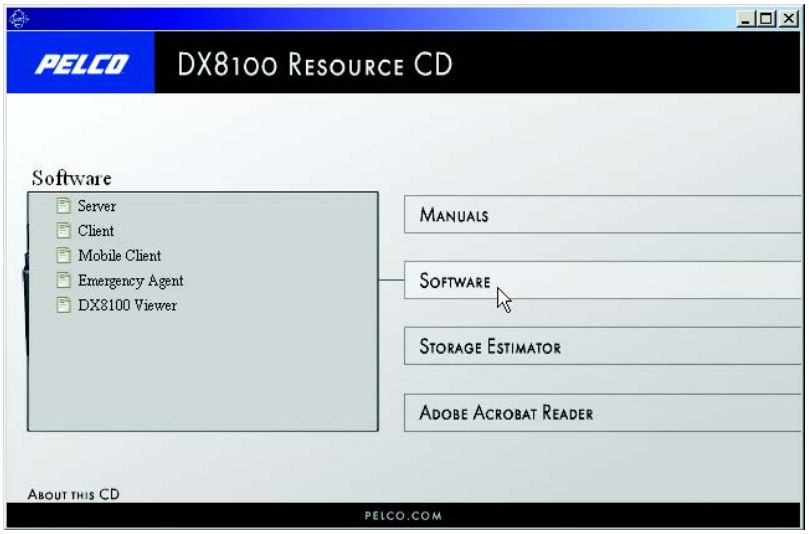

Figure 37. Resource CD Software Installation Options

5. Click Client. The DX8100 Security Setup dialog box opens.

DX8100 Security Setup
DX8100 IPSec Setup
The following will install IPSec configurations on your PC. This will allow you to connect to IPSec-enabled DX8100 Servers. You may turn this option off at anytime.
Install IPSec Configurations
Next >
Exit

Figure 38. DX8100 Security Setup Dialog Box

6. Verify that the Install IPSec Configurations check box is selected.

   IPSec is a standard security protocol used by the DX8100 Series DVR and its clients to communicate safely over a network.

7. Click Next. The DX8100 Client Setup dialog box opens.

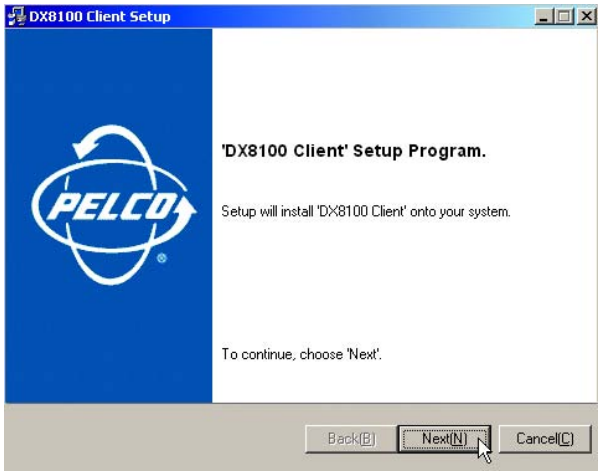

Figure 39. DX8100 Client Setup Dialog Box

8. Click Next. The Software License Agreement dialog box opens.

DX8100 Client Setup
Software License Agreement
To install, you must accept all the items of the License Agreement.
Pelco's End-User Software License Agreement
BY INSTALLING THE SOFTWARE, YOU ACKNOWLEDGE THAT YOU HAVE READ THIS AGREEMENT, AND THAT YOU UNDERSTAND AND AGREE THAT YOU ARE BOUND BY ITS TERMS AND CONDITIONS. IF YOU DO NOT AGREE TO THE TERMS AND CONDITIONS OF THIS AGREEMENT, YOU WILL NOT BE ALLOWED TO INSTALL THE SOFTWARE.
SOFTWARE LICENSE AGREEMENT
ALL SOFTWARE PROGRAMS ("SOFTWARE") PROVIDED BY PELCO ARE PROPRIETARY PRODUCTS OF PELCO, CLOVIS, CALIFORNIA, AND ARE PROTECTED BY COPYRIGHT LAWS AND INTERNATIONAL TREATY. YOU MUST TREAT THE SOFTWARE LIKE ANY OTHER COPYRIGHTED MATERIAL, EXCEPT THAT YOU MAY MAKE AN ARCHIVAL COPY OF THE SOFTWARE FOR EACH COPY WHICH IS LICENSED TO YOU.
THIS AGREEMENT IS A LEGAL CONTRACT BETWEEN YOU, THE END USER
I accept this License Agreement
Back(B)
Next(N)
Cancel(C)

Figure 40. Software License Agreement Dialog Box

9. Read the license agreement and select the "I accept this License Agreement" check box.

10. Click Next. The Select Installation Folder dialog box opens.

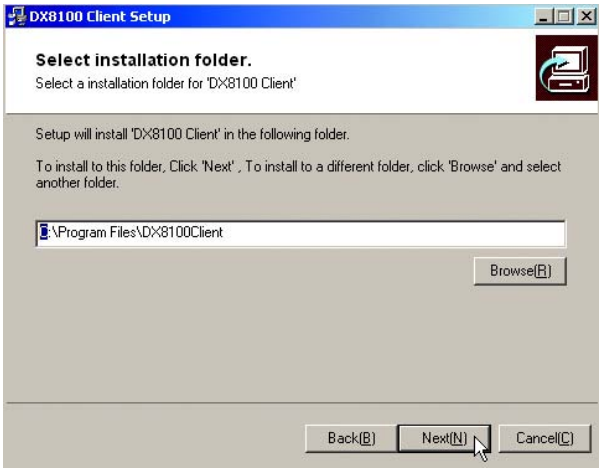
DX8100 Client Setup
Select installation folder.
Select a installation folder for 'DX8100 Client'
Setup will install 'DX8100 Client' in the following folder.
To install to this folder, Click 'Next' , To install to a different folder, click 'Browse' and select another folder.
:\Program Files\DX8100Client
Browse(R)
Back(B)
Next(N)
Cancel(C)

Figure 41. Select Installation Folder Dialog Box

11. Click Next to accept the default installation folder. After the DX8100 Cliet software is installed, the "Installation is completed successfully" dialog box opens.

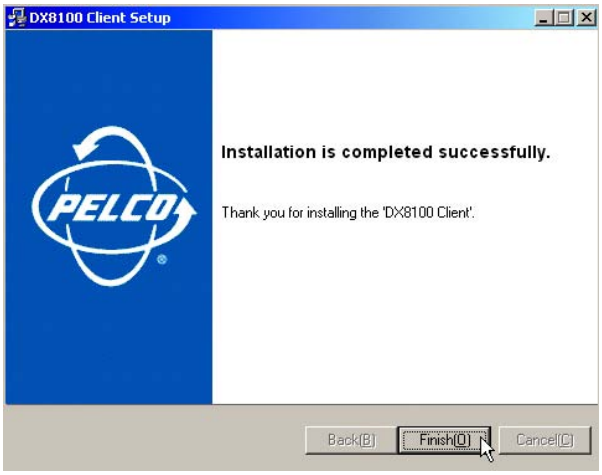

Figure 42. Installation is Completed Successfully Dialog Box

12. Click Finish to complete the installation process.

ENABLING IPSEC SECURITY SERVICES

In order to communicate with a networked DX8100 Series DVR, IPSec security must be enabled on your computer. To see the Manage IPSec Settings menu option from the Start menu, the Start menu has to be changed to the Classic View.

To enable IPSec security services:

1. Do one of the following:
   - Verify that the Start menu is in the Classic View.
   - Set the Start menu to the Classic View.
2. Go to Start > Manage IPSec Settings. The DX8100 IPSec Policy dialog box opens.

Figure 43. Enabling IPSec Security for the PC Client Application

3. Select the Enable DX8100 IPSec Policy check box if it is not already selected.
4. (If applicable) Set the Start menu to its previous view.

DISABLING IPSEC SECURITY SERVICES

Disabling IPSec security services may hamper your PC's ability to communicate with DX8100 servers. Consult your system administrator before disabling IPSec security. For information about using the DX8100 Client application, refer to the DX8100 Client Applications manual.

To disable IPSec security services:

1. Do one of the following:
   - Verify that the Start menu is in Classic View.
   - Set the Start menu to Classic View.
2. Go to Start > Manage IPSec Settings. The DX8100 IPSec Policy dialog box opens.

Figure 44. Disabling IPSec Security for the PC Client Application

3. De-select the Enable DX8100 IPSec Policy check box.
4. (If applicable) Set the Start menu to its previous view.

INSTALLING THE CLIENT EMERGENCY AGENT APPLICATION

To install the Emergency Agent application:

1. Start the Windows operating system.
2. Close all programs, including any antivirus software.

3. Insert the DX8100 Resource CD into the DVD drive of your PC and wait for the DX8100 Resource CD window opens.

Figure 45. Resource CD Screen: Emergency Agent Installation Option

4. Click Software. The DX8100 software installation options are displayed.

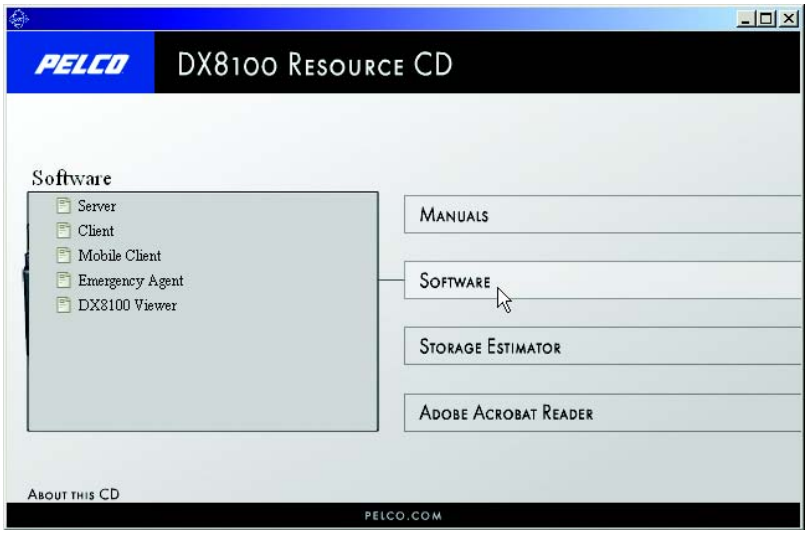

Figure 46. Resource CD Software Installation Options

5. Click Emergency Agent. The DX8100 Emergency Agent Setup dialog box opens.

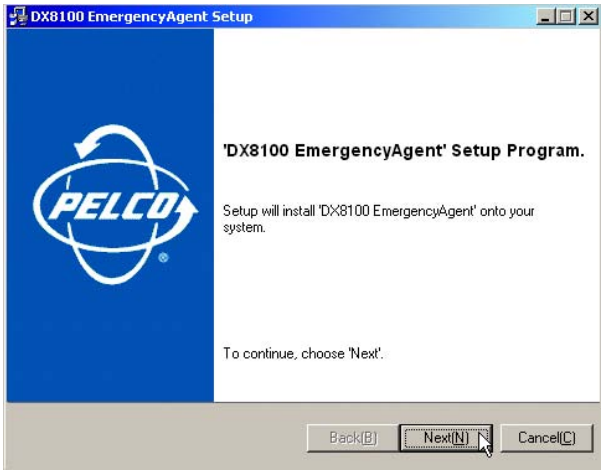

Figure 47. DX8100 Emergency Agent Setup Dialog Box

6. Click Next. The Software License Agreement dialog box opens.

DX8100 EmergencyAgent Setup
Software License Agreement
To install, you must accept all the items of the License Agreement.
Pelco's End-User Software License Agreement
BY INSTALLING THE SOFTWARE, YOU ACKNOWLEDGE THAT YOU HAVE READ THIS AGREEMENT, AND THAT YOU UNDERSTAND AND AGREE THAT YOU ARE BOUND BY ITS TERMS AND CONDITIONS. IF YOU DO NOT AGREE TO THE TERMS AND CONDITIONS OF THIS AGREEMENT, YOU WILL NOT BE ALLOWED TO INSTALL THE SOFTWARE.
SOFTWARE LICENSE AGREEMENT
ALL SOFTWARE PROGRAMS ("SOFTWARE") PROVIDED BY PELCO ARE PROPRIETARY PRODUCTS OF PELCO, CLOVIS, CALIFORNIA, AND ARE PROTECTED BY COPYRIGHT LAWS AND INTERNATIONAL TREATY. YOU MUST TREAT THE SOFTWARE LIKE ANY OTHER COPYRIGHTED MATERIAL, EXCEPT THAT YOU MAY MAKE AN ARCHIVAL COPY OF THE SOFTWARE FOR EACH COPY WHICH IS LICENSED TO YOU.
THIS AGREEMENT IS A LEGAL CONTRACT BETWEEN YOU, THE END USER
I accept this License Agreement
Back(B)
Next(N)
Cancel(C)

Figure 48. Emergency Agent Software License Agreement Dialog Box

7. Read the license agreement and select the "I accept this License Agreement" check box.
8. Click Next. The Select Installation Folder dialog box opens.

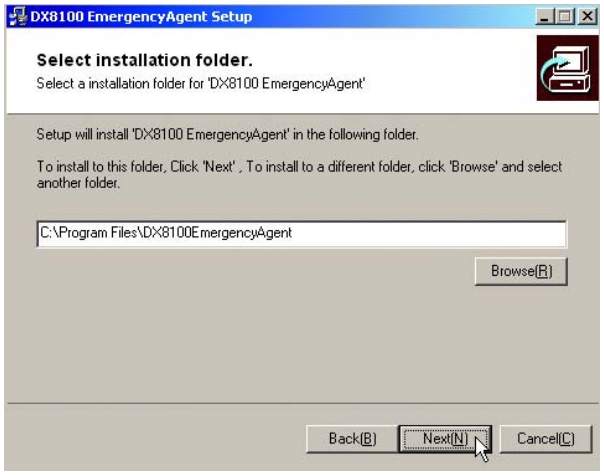
DX8100 EmergencyAgent Setup
Select installation folder.
Select a installation folder for 'DX8100 EmergencyAgent'
Setup will install 'DX8100 EmergencyAgent' in the following folder.
To install to this folder, Click 'Next' , To install to a different folder, click 'Browse' and select another folder.
C:\Program Files\DX8100EmergencyAgent
Browse(R)
Back(B)
Next(N)
Cancel(C)

Figure 49. Select Installation Folder Dialog Box

9. Click Next to accept the default installation folder. After the Emergency Agent software is installed, the “Installation is completed successfully” dialog box opens.

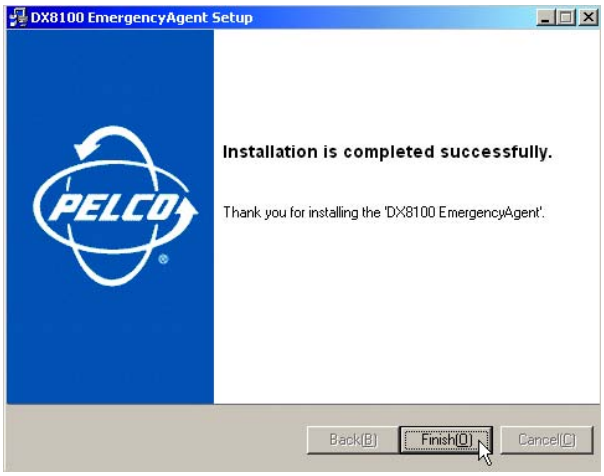

Figure 50. Installation is Completed Successfully Dialog Box

10. Click Finish to complete the installation process.

INSTALLING THE DX8100 VIEWER

To install the DX8100 Viewer:

1. Start the Windows operating system.
2. Close all programs, including any antivirus software.
3. Insert the DX8100 Resource CD into the DVD drive of your PC and wait for the window to open.

Figure 51. Resource CD Window_C2629M-A_0001

4. Click Software. The DX8100 software installation options are displayed.

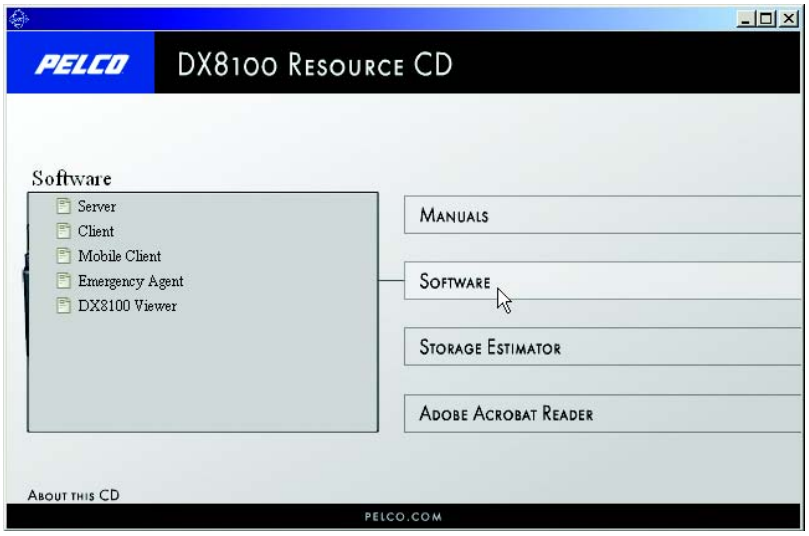

Figure 52. Resource CD Software Installation Options

5. Click DX8100 Viewer. The DX8100 Viewer Setup dialog box opens.

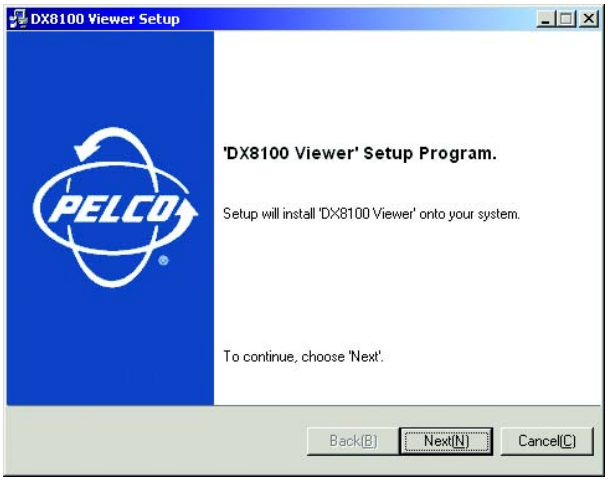

Figure 53. DX8100 Viewer Dialog Box

6. Click Next. The Software License Agreement dialog box opens.

DX8100 EmergencyAgent Setup
Software License Agreement
To install, you must accept all the items of the License Agreement.
Pelco's End-User Software License Agreement
BY INSTALLING THE SOFTWARE, YOU ACKNOWLEDGE THAT YOU HAVE READ THIS AGREEMENT, AND THAT YOU UNDERSTAND AND AGREE THAT YOU ARE BOUND BY ITS TERMS AND CONDITIONS. IF YOU DO NOT AGREE TO THE TERMS AND CONDITIONS OF THIS AGREEMENT, YOU WILL NOT BE ALLOWED TO INSTALL THE SOFTWARE.
SOFTWARE LICENSE AGREEMENT
ALL SOFTWARE PROGRAMS ("SOFTWARE") PROVIDED BY PELCO ARE PROPRIETARY PRODUCTS OF PELCO, CLOVIS, CALIFORNIA, AND ARE PROTECTED BY COPYRIGHT LAWS AND INTERNATIONAL TREATY. YOU MUST TREAT THE SOFTWARE LIKE ANY OTHER COPYRIGHTED MATERIAL, EXCEPT THAT YOU MAY MAKE AN ARCHIVAL COPY OF THE SOFTWARE FOR EACH COPY WHICH IS LICENSED TO YOU.
THIS AGREEMENT IS A LEGAL CONTRACT BETWEEN YOU, THE END USER
I accept this License Agreement
Back(B)
Next(N)
Cancel(C)

Figure 54. Software License Agreement Dialog Box

7. Read the license agreement and select the "I accept this License Agreement" check box.
8. Click Next. The Select Installation Folder dialog box opens.

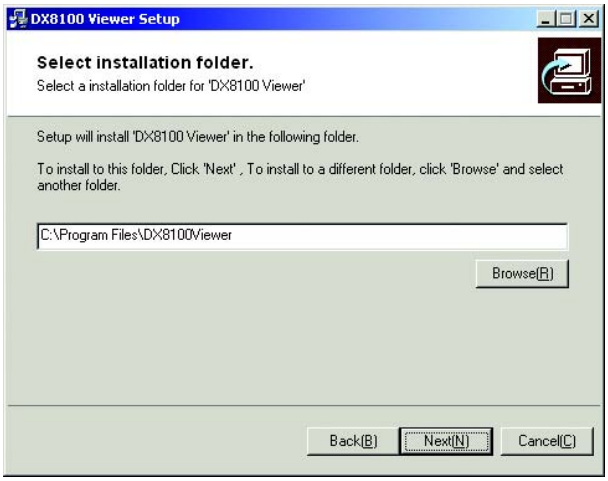
DX8100 Viewer Setup
Select installation folder.
Select a installation folder for 'DX8100 Viewer'
Setup will install 'DX8100 Viewer' in the following folder.
To install to this folder, Click 'Next' , To install to a different folder, click 'Browse' and select another folder.
C:\Program Files\DX8100Viewer
Browse(R)
Back(B)
Next(N)
Cancel(C)

Figure 55. Select Installation Folder Dialog Box

9. Click Next to accept the default installation folder. The DX8100 Viewer software is installed, and the "Installation is completed successfully" dialog box opens.

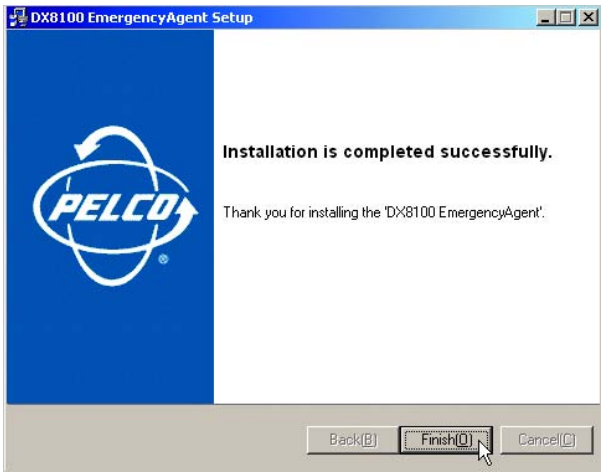

Figure 56. Installation is Completed Successfully Dialog Box

10. Click Finish to complete the installation process.

INSTALLING THE DX8100 WEB CLIENT

The first time you use a web browser to connect to a DVR server, an ActiveX® control application is downloaded and installed on your local computer. This control facilitates usage of the web client's interactive features. Pelco recommends that you only use Internet Explorer because the DX8100 Web Client application is not compatible with Netscape Navigator.

To install the DX8100 Web Client application:

1. Install and enable IPSec security services. For instructions on installing IPSec security services, refer to *Installing the PC Client Application* or *Installing the Client Emergency Agent Application*.

   You must install either the PC Client application or the Client Emergency Agent application to install IPSec security services.

2. Start the Microsoft Internet Explorer web browser.

3. Enter the IP address of one of the DX8100 servers you want to connect to in the address bar. The Enter Network Password dialog box opens.

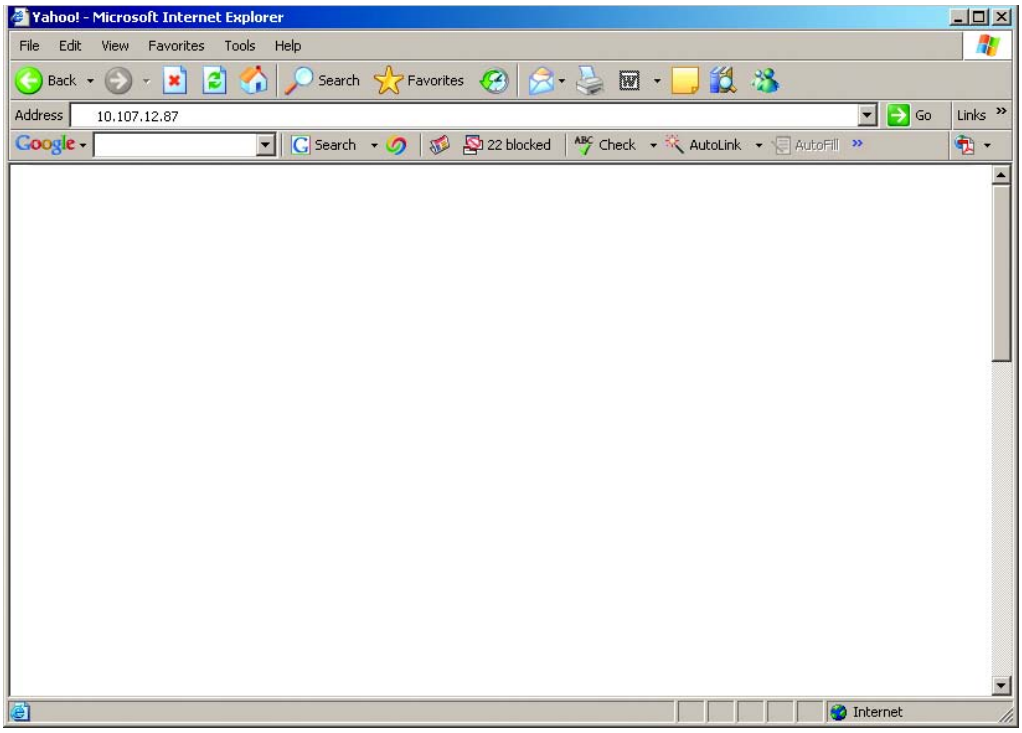

Figure 57. Enter Network Password Dialog Box

4. Click OK. The DX8100 Web client ActiveX control installation dialog box opens.

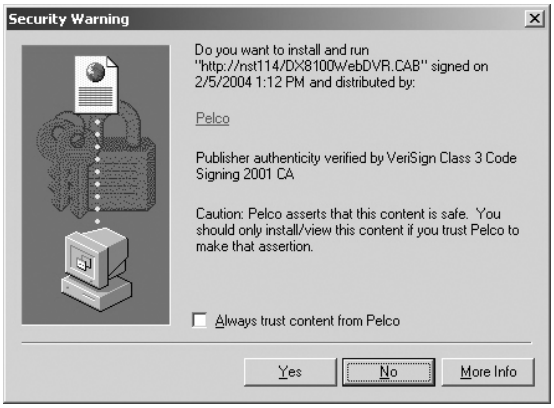
Security Warning
Do you want to install and run "http://nst114/DX8100WebDVR.CAB" signed on 2/5/2004 1:12 PM and distributed by:
Pelco
Publisher authenticity verified by VeriSign Class 3 Code Signing 2001 CA
Caution: Pelco asserts that this content is safe. You should only install/view this content if you trust Pelco to make that assertion.
Always trust content from Pelco
Yes
No
More Info

Figure 58. Security Warning Dialog Box: ActiveX Control Installation www activex

5. Click Yes.

6. Wait while the ActiveX controls are downloaded to your PC and your browser software is updated.

RECOMMENDED SYSTEM REQUIREMENTS FOR MOBILE (PDA) CLIENT

The recommended system requirements for a mobile (PDA) client are as follows:

- PDA Hardware: A Pocket PC-compatible handheld device
- Processor: Intel Xscale®, compatible with a minimum processor speed of 400 MHz
- Memory: 64 MB of RAM
- Video: TFT liquid crystal display with minimum 240 x 320 display resolution, 64K colors
- Operating System: Microsoft Pocket PC 2002 or later
- A PC with Windows operating system and Microsoft ActiveSync® version 3.5 or later installed
- Wired or wireless networking capability

INSTALLING THE MOBILE (PDA) CLIENT APPLICATION

1. Install ActiveSync on your Windows PC if it is not already present.
2. Connect your handheld device to your PC.

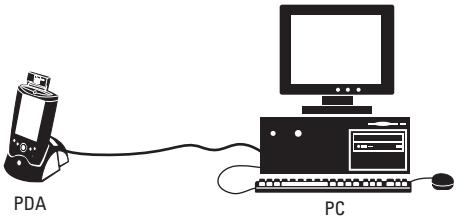

Figure 59. PDA to PC Connection

3. Turn on your handheld device if it is not already running.
4. Insert the DX8100 Resource CD into the DVD drive of your PC, and wait for the DX8100 Resource CD window to open.

Figure 60. Resource CD Window: Mobile Client Installation Option

5. Click Software. The DX8100 software installation options are displayed.

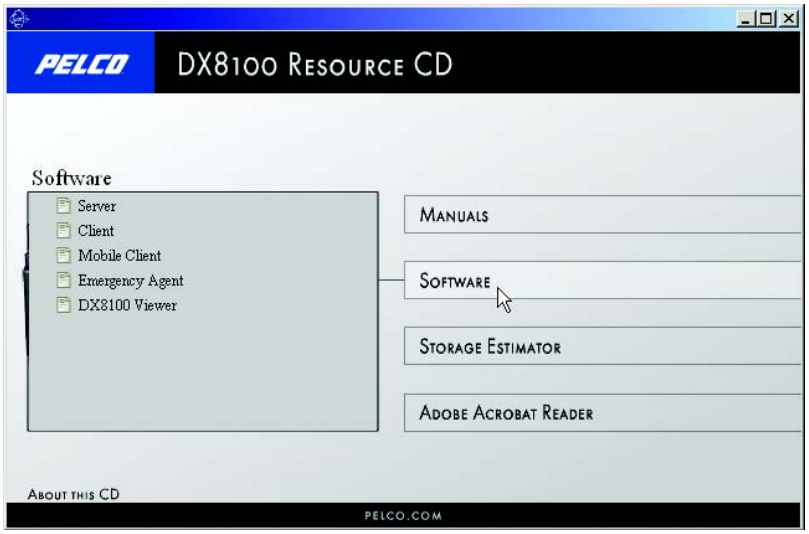

Figure 61. Resource CD Software Installation Options

6. Click Mobile Client Software. The Pocket PC installation dialog box opens.

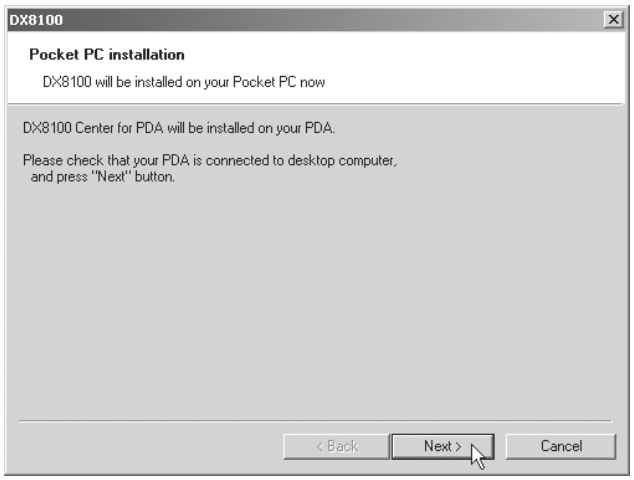
DX8100
Pocket PC installation
DX8100 will be installed on your Pocket PC now
DX8100 Center for PDA will be installed on your PDA.
Please check that your PDA is connected to desktop computer, and press "Next" button.
< Back
Next >
Cancel

Figure 62. Pocket PC Installation Dialog Box

7. Click Next. The Software License Agreement dialog box opens.

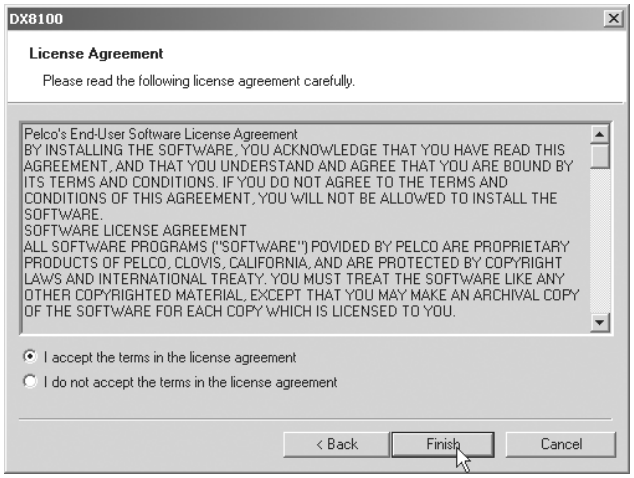
DX8100
License Agreement
Please read the following license agreement carefully.
Pelco's End-User Software License Agreement
BY INSTALLING THE SOFTWARE, YOU ACKNOWLEDGE THAT YOU HAVE READ THIS AGREEMENT, AND THAT YOU UNDERSTAND AND AGREE THAT YOU ARE BOUND BY ITS TERMS AND CONDITIONS. IF YOU DO NOT AGREE TO THE TERMS AND CONDITIONS OF THIS AGREEMENT, YOU WILL NOT BE ALLOWED TO INSTALL THE SOFTWARE.
SOFTWARE LICENSE AGREEMENT
ALL SOFTWARE PROGRAMS ("SOFTWARE") POVIDED BY PELCO ARE PROPRIETARY PRODUCTS OF PELCO, CLOVIS, CALIFORNIA, AND ARE PROTECTED BY COPYRIGHT LAWS AND INTERNATIONAL TREATY. YOU MUST TREAT THE SOFTWARE LIKE ANY OTHER COPYRIGHTED MATERIAL, EXCEPT THAT YOU MAY MAKE AN ARCHIVAL COPY OF THE SOFTWARE FOR EACH COPY WHICH IS LICENSED TO YOU.
I accept the terms in the license agreement
I do not accept the terms in the license agreement
< Back
Finish
Cancel

Figure 63. License Agreement Dialog Box

8. Read the license agreement and select the “I accept the terms of the license agreement" check box.
9. Click Next. The Select Installation Folder dialog box opens.



Figure 64. Installing Applications Dialog Box

10. Click Yes to accept the default installation directory.
11. Wait while ActiveSync copies the DX8100 Mobile Client program files to your handheld device, and then click OK in the Application Downloading Complete dialog box.

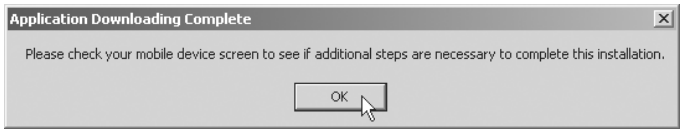
Application Downloading Complete
Please check your mobile device screen to see if additional steps are necessary to complete this installation.
OK

Figure 65. Application Downloading Complete Dialog Box

Accessing DX8100 Electronic Documentation

The DX8100 is supported by electronic and printed documentation. The printed documents come packaged with the DX8100. Table E describes each individual document, its distribution, and its intended use. The DX8100 server and client application also includes an online Help system. By default, the Help system is not enabled for viewing.

Table E. DX8100 Documentation

Document Name	Location	Purpose
Important Safety Instructions	Box and CD	Detailed instructions about how to safely use the DX8100
Important Security Information for System Administrators	Box and CD	Provides system administrator information for administering the DX8100
Quick Start Installation Guide	Box and CD	Basic information on identifying and connecting the parts of the DX8100 Series DVR
Quick Start Operations Guide	Box and CD	Basic information to help users to begin using the DX8100
Installation Manual	Box and CD	Provides detailed instructions on installing the DX8100
Operation and Programming for Client Application Software	CD	Detailed instructions on using the included PC, Web, and mobile client application software programs
Operation and Programming for Server Application Software	CD	Detailed instructions on using the DX8100
Upgrade and Recovery Instructions	Box and CD	Detailed instructions about upgrading the DX8100 or reinstalling DX8100 software
Using McAfee® VirusScan	CD	Detailed instructions on installing and using McAfee
Using Symantec™ AntiVirus	CD	Detailed instructions on installing and using Symantec

Provides system administrator information for administering the DX8100

To access the electronic manuals from the Resource CD:

1. Insert the DX8100 Resource CD into your PC's DVD drive, and then wait for the window to open.

Figure 66. Resource CD Window: Mobile Client Installation Option

2. If your system does not have a current version of Adobe® Acrobat® Reader installed, click Install Adobe Acrobat Reader and follow the directions.

3. Click Manuals. The documents included on the CD are displayed.

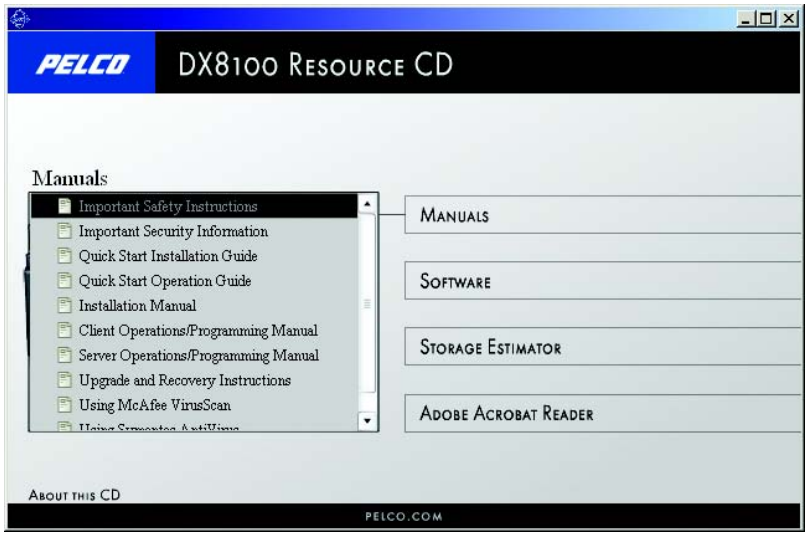

Figure 67. Resource CD Window: PC Client Installation Option

4. Click the manual you want to view. The document is displayed in Acrobat Reader.

Appendix A: Printer Setup

This sections describes how to set up printer hardware and software.

PRINTER HARDWARE SETUP

Only printers listed on the Microsoft Windows 2000 Hardware Compatibility List and exhibiting the Designed for Microsoft Windows XP logo are supported by the DX8100. If installing a network printer, consult your network administrator for directions.

To print still images of recorded video from the DX8100 DVR, you must install a Windows-compatible printer using the procedure below.

Ensure that a printer has been connected to the LPT1 printer port or a USB port of the DVR or that a shared printer is available on the network.

To connect a printer to the DVR:

1. Shut down the DX8100. For more information about shutting down the DX8100, refer to *Shutting Down* for instructions.
2. Connect the printer to the DX8100 using a standard parallel printer cable connected to the LPT1 port on the back panel of the DVR.

   or

   Connect the printer to the DX8100 using a standard USB cable connected to one of the four USB 2.0 ports on the back panel of the DVR.
3. Connect the printer's power cord.
4. Restart the DX8100.
5. Set the printer's power switch to On.

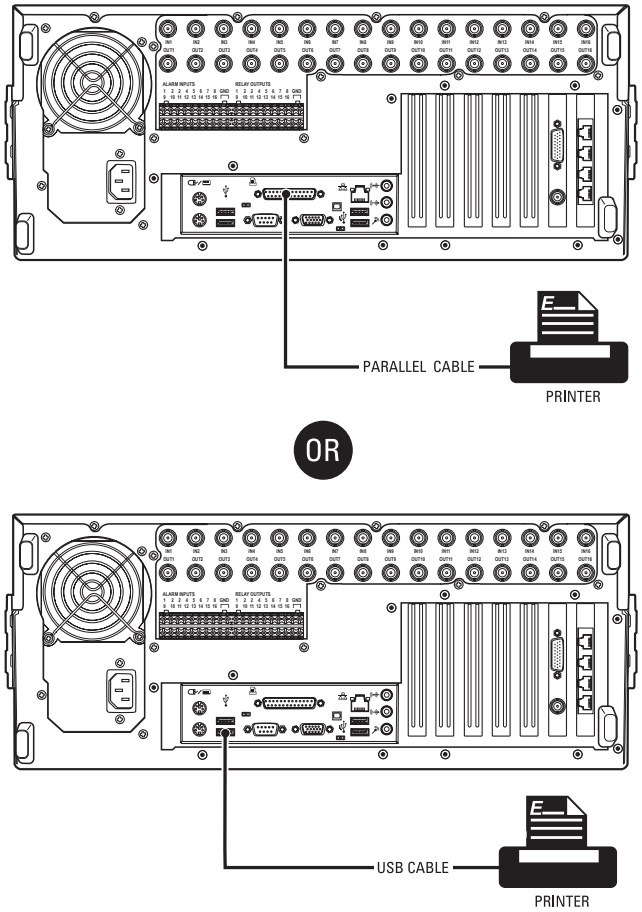

Figure 68. Printer Connection

PRINTER SOFTWARE SETUP

This section describes how to set up printer software.

⚠ **WARNING:** Do not install any software that may have come with your printer on the DX8100. The DX8100's operating system includes built-in services designed to communicate with printers that exhibit the Designed for Microsoft Windows XP logo.

SETTING UP A LOCAL PLUG-AND-PLAY PRINTER

1. Make sure your printer is properly connected according to the instructions in the previous section.
2. Start the DX8100.
3. Wait while the system detects your printer and the Windows Add Printer Wizard begins.
4. The DX8100 client starts.
5. Log in to the DX8100 as an Administrator level user.
6. Exit the DX8100 application and return to the Windows operating system. For more information, refer to *Exiting to Windows Operating System*.
7. Click Start > Settings > Printers. The Printer Setup window opens. Double-click Add Printer.

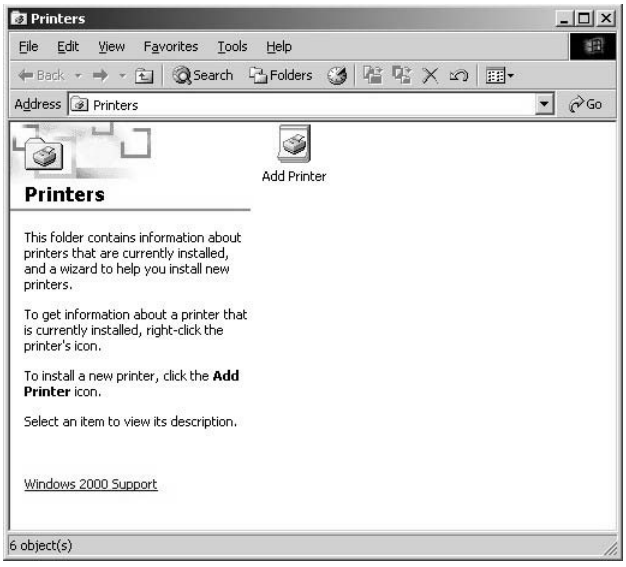
Printers
File Edit View Favorites Tools Help
Back Search Folders
Address Printers
Go
Add Printer
Printers
This folder contains information about printers that are currently installed, and a wizard to help you install new printers.
To get information about a printer that is currently installed, right-click the printer's icon.
To install a new printer, click the Add Printer icon.
Select an item to view its description.
Windows 2000 Support
6 object(s)

Figure 69. Printer Setup Window (Plug-and-Play)

8. The Add Printer Wizard dialog box opens. Click Next.

Add Printer Wizard
Welcome to the Add Printer Wizard
This wizard helps you install a printer or make printer connections.
To continue, click Next.
< Back
Next >
Cancel

Figure 70. Add Printer Wizard Dialog Box (Plug-and-Play)

The Local or Network Printer dialog box opens.

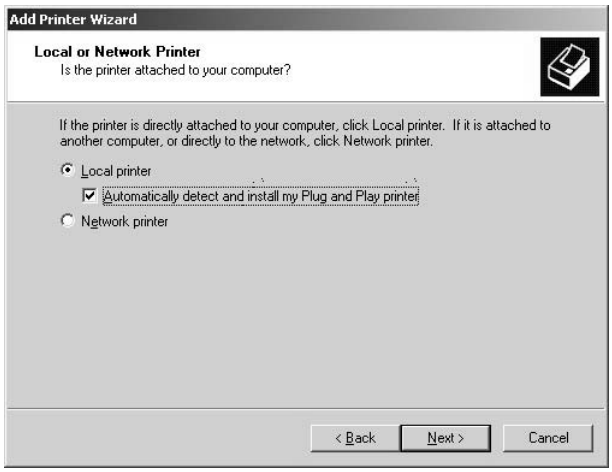
Add Printer Wizard
Local or Network Printer
Is the printer attached to your computer?
If the printer is directly attached to your computer, click Local printer. If it is attached to another computer, or directly to the network, click Network printer.
Local printer
Automatically detect and install my Plug and Play printer
Network printer
< Back
Next >
Cancel

Figure 71. Local or Network Printer Dialog Box (Plug-and-Play)

9. Select the "Local printer" option button.
10. Select the "Automatically detect and install my Plug and Play printer" check box if it is not already selected.
11. Click Next and wait while the DX8100 finds and initiates your printer.

12. The New Printer Detection dialog box opens. Select the Yes radio button, if it is not already selected, to print a test page. Then click Next.

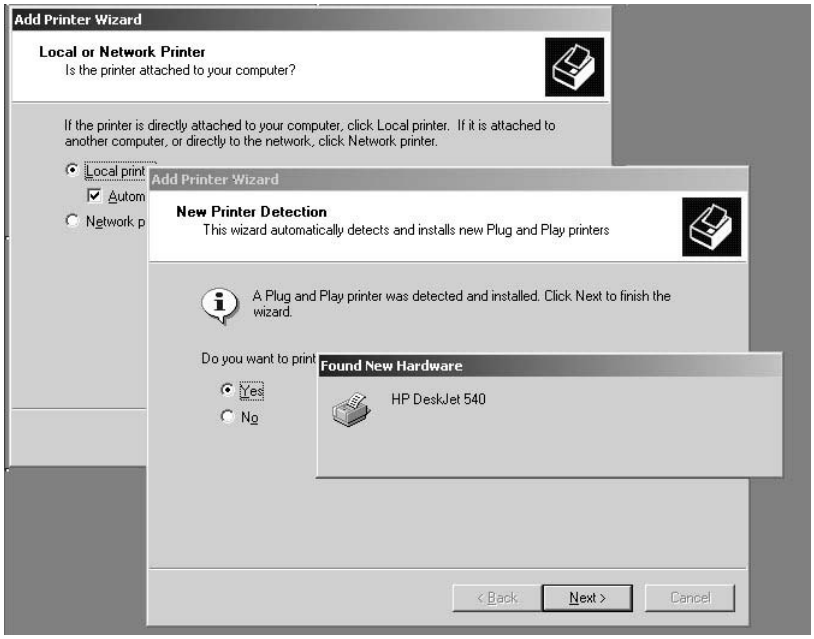
Add Printer Wizard
Local or Network Printer
Is the printer attached to your computer?
If the printer is directly attached to your computer, click Local printer. If it is attached to another computer, or directly to the network, click Network printer.
Local print
Autom
Network p
Add Printer Wizard
New Printer Detection
This wizard automatically detects and installs new Plug and Play printers
A Plug and Play printer was detected and installed. Click Next to finish the wizard.
Do you want to print
Yes
No
Found New Hardware
HP DeskJet 540
< Back
Next >
Cancel

Figure 72. Finding and Initializing a Plug-and-Play Printer

13. The Finish dialog box opens. Click Finish.

Figure 73. Completing the Add Printer Wizard Dialog Box (Plug-and-Play)

SETTING UP A LOCAL PRINTER THAT IS NOT PLUG-AND-PLAY

To set up a local printer that is not plug-and-play:

1. Start the DX8100.
2. Log in as an Administrator level user.
3. Exit the DX8100 application and return to the Windows operating system. For more information, refer to *Exiting to Windows Operating System*.
4. Click Start > Settings > Printers. The Printer window opens. Double-click Add Printer.

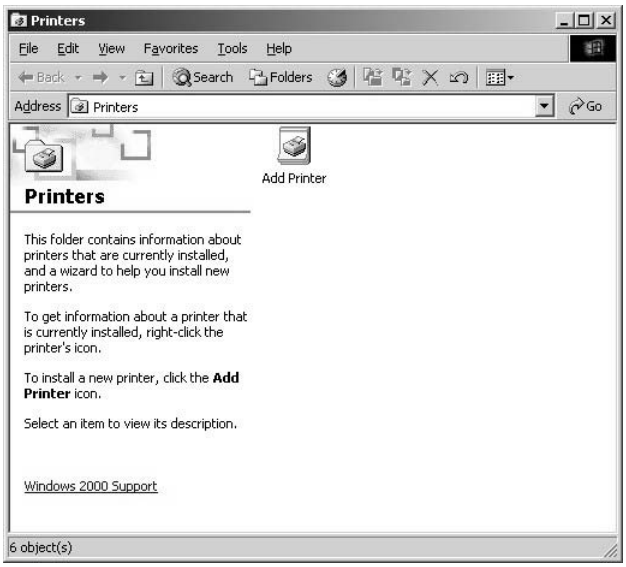
Printers
File Edit View Favorites Tools Help
Back Search Folders
Address Printers
Go
Add Printer
Printers
This folder contains information about printers that are currently installed, and a wizard to help you install new printers.
To get information about a printer that is currently installed, right-click the printer's icon.
To install a new printer, click the Add Printer icon.
Select an item to view its description.
Windows 2000 Support
6 object(s)

Figure 74. Printer Window (Not Plug-and-Play)

5. Welcome to the Add Printer Wizard dialog box opens. Click Next.

Add Printer Wizard
Welcome to the Add Printer Wizard
This wizard helps you install a printer or make printer connections.
To continue, click Next.
< Back
Next >
Cancel

Figure 75. Welcome to the Add Printer Dialog Box

6. The Local or Network Printer dialog box opens. Select the “Local printer” radio button, and then click Next.

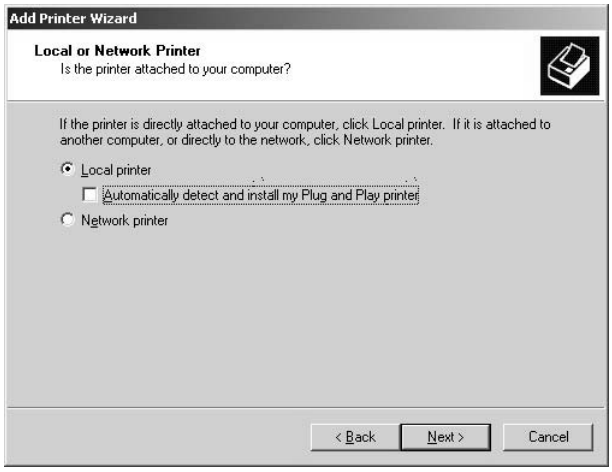
Add Printer Wizard
Local or Network Printer
Is the printer attached to your computer?
If the printer is directly attached to your computer, click Local printer. If it is attached to another computer, or directly to the network, click Network printer.
Local printer
Automatically detect and install my Plug and Play printer
Network printer
< Back
Next >
Cancel

Figure 76. Local or Network Printer Dialog Box (Not Plug-and-Play)

7. The Select the Printer Port dialog box opens.

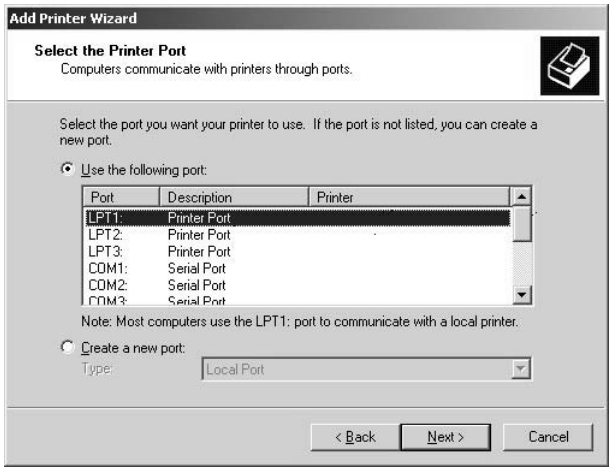

Figure 77. Select the Printer Port Dialog Box (Not Plug-and-Play)

8. Select the “Use the following port” radio button if it is not already selected.
9. Select LPT1.
10. Click Next.

11. The Add Printer Wizard dialog box opens.

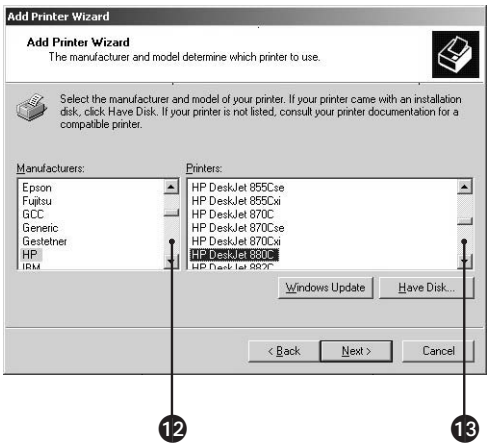

Figure 78. Add Printer Wizard Dialog Box (Not Plug-and-Play)

12. Scroll through the list of manufacturers and select the appropriate make.
13. Scroll through the list of printers and select the appropriate model.
14. Click Next.
15. The Name Your Printer dialog box opens. Click Next.

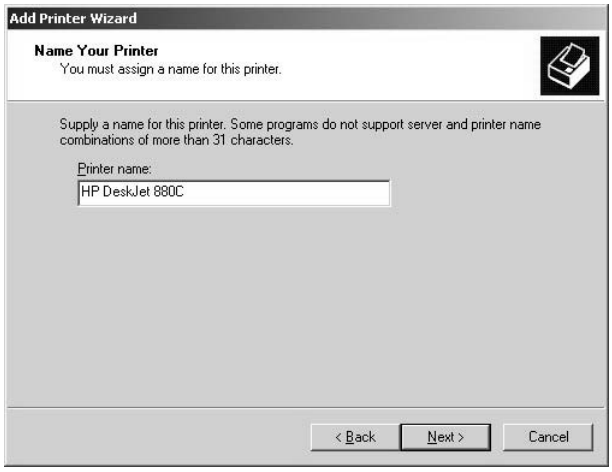
Add Printer Wizard
Name Your Printer
You must assign a name for this printer.
Supply a name for this printer. Some programs do not support server and printer name combinations of more than 31 characters.
Printer name:
HP DeskJet 880C
< Back
Next >
Cancel

Figure 79. Name Your Printer Dialog Box (Not Plug-and-Play)

16. The Printer Sharing dialog box opens. Select the "Do not share this printer" radio button if it is not already selected, and then click Next.

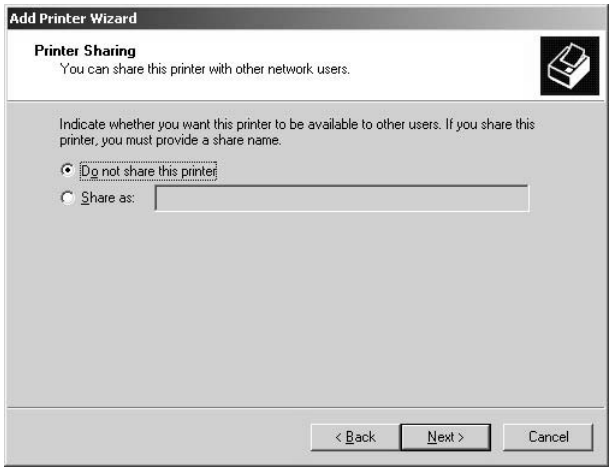
Add Printer Wizard
Printer Sharing
You can share this printer with other network users.
Indicate whether you want this printer to be available to other users. If you share this printer, you must provide a share name.
Do not share this printer
Share as:
< Back
Next >
Cancel

Figure 80. Printer Sharing Dialog Box (Not Plug-and-Play)

17. The Print Test Page dialog box opens. Select the Yes radio button, if it is not already selected, to print a test page. Then click Next.

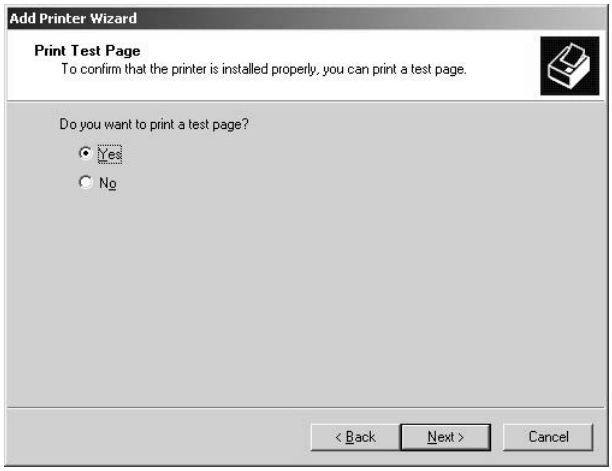
Add Printer Wizard
Print Test Page
To confirm that the printer is installed properly, you can print a test page.
Do you want to print a test page?
Yes
No
< Back
Next >
Cancel

Figure 81. Print Test Page Dialog Box (Not Plug-and-Play)

18. The Completing the Add Printer Wizard dialog box opens. Click Finish.

Figure 82. Completing the Add Printer Wizard Dialog Box (Not Plug-and-Play)

SETTING UP A NETWORK PRINTER

Consult your network administrator for assistance on locating and setting up an available network printer.

1. Start the DX8100.
2. Log in as an Administrator level user.
3. Exit the DX8100 application and return to the Windows operating system. For more information, refer to *Exiting to Windows Operating System*.
4. Click Start > Settings > Printers. The Printer Setup window opens. Double-click Add Printer.

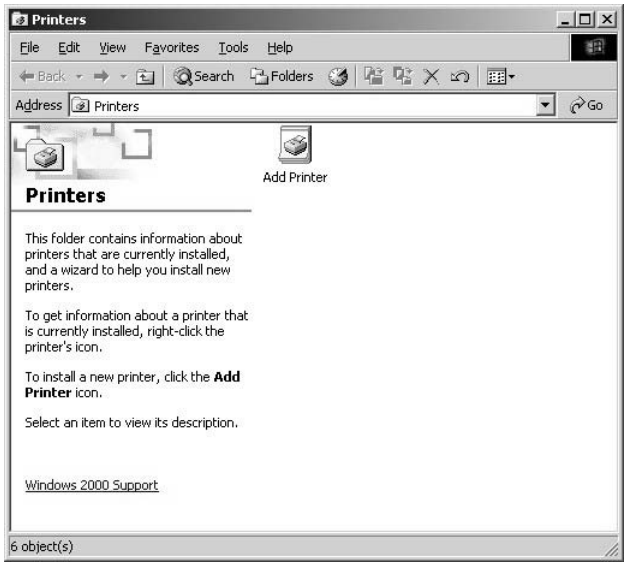
Printers
File Edit View Favorites Tools Help
Back Search Folders
Address Printers
Go
Add Printer
Printers
This folder contains information about printers that are currently installed, and a wizard to help you install new printers.
To get information about a printer that is currently installed, right-click the printer's icon.
To install a new printer, click the Add Printer icon.
Select an item to view its description.
Windows 2000 Support
6 object(s)

Figure 83. Printer Window (Network)

5. The Welcome to the Add Printer Wizard dialog box opens. Click Next.

Add Printer Wizard
Welcome to the Add Printer Wizard
This wizard helps you install a printer or make printer connections.
To continue, click Next.
< Back
Next >
Cancel

Figure 84. Welcome to the Add Printer Wizard Dialog Box (Network)

6. The Local or Network Printer dialog box opens. Select the “Network printer” radio button, and then click Next.

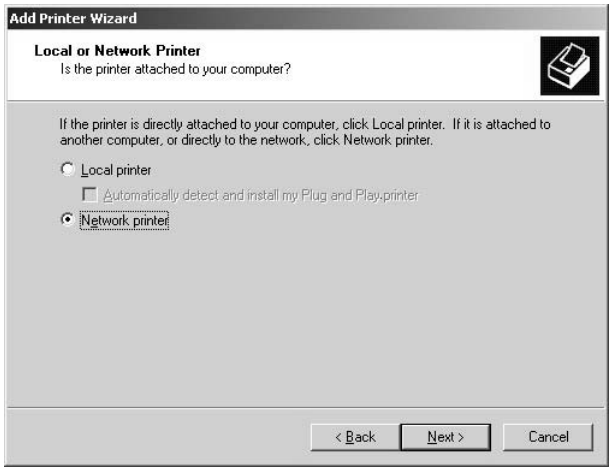
Add Printer Wizard
Local or Network Printer
Is the printer attached to your computer?
If the printer is directly attached to your computer, click Local printer. If it is attached to another computer, or directly to the network, click Network printer.
Local printer
Automatically detect and install my Plug and Play printer
Network printer
< Back
Next >
Cancel

Figure 85. Local or Network Printer Dialog Box (Network)

7. The Locate Your Printer dialog box opens. Leave the Name text box blank and then click Next.

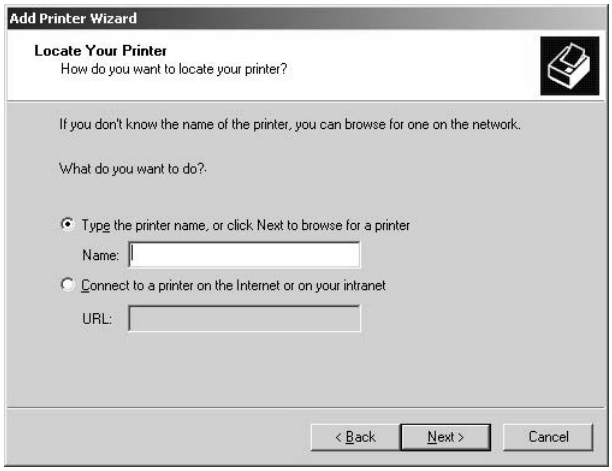
Add Printer Wizard
Locate Your Printer
How do you want to locate your printer?
If you don't know the name of the printer, you can browse for one on the network.
What do you want to do?
Type the printer name, or click Next to browse for a printer
Name:
Connect to a printer on the Internet or on your intranet
URL:
< Back
Next >
Cancel

Figure 86. Locate Your Printer Dialog Box (Network)

8. The Browse for Printer dialog box opens.

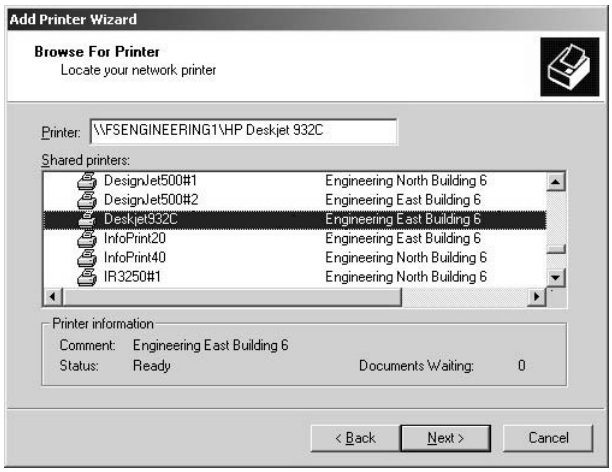

Figure 87. Browse For Printer Dialog Box (Network)

9. Select the desired printer from the list, and then click Next.
    - Depending on your network setup, you may have to search through a hierarchical list of network resources to find the appropriate printer. It may be necessary to double-click objects in the list to open each branch of the resource hierarchy.
    - If the printer driver software is not already installed on your DX8100, you will be prompted to download it. If prompted, click Yes to begin the driver download and follow any remaining instructions in the Add Printer Wizard
10. The New Printer Detection dialog box opens. Select the Yes radio button, if it is not already selected, to print a test page. Then click Next.

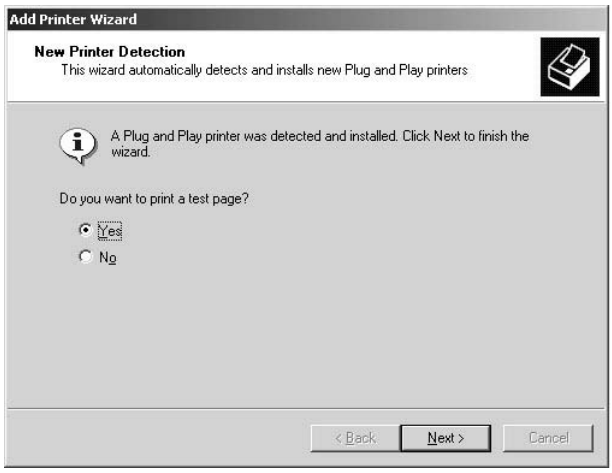
Add Printer Wizard
New Printer Detection
This wizard automatically detects and installs new Plug and Play printers
A Plug and Play printer was detected and installed. Click Next to finish the wizard.
Do you want to print a test page?
Yes
No
< Back
Next >
Cancel

Figure 88. New Printer Detection Dialog Box (Network)

11. The Completing the Add Printer Wizard dialog box opens. Click Finish.

Add Printer Wizard
Completing the Add Printer Wizard
You have successfully completed the Add Printer wizard.
You specified the following printer settings:
Name: HP Deskjet 932C on FSENGINEERING1
Default: No
Location: Engineering East Building 6
Comment: Engineering East Building 6
To close this wizard, click Finish.
< Back
Finish
Cancel

Figure 89. Completing the Add Printer Wizard Dialog Box

Appendix B: Connecting the Optional DX8108/DX8116-MUX Card

This appendix describes how to connect an analog monitor to the optional DX8108-MUX/DX8116-MUX Card to view real-time video on an analog monitor. The MUX Card also displays real-time video on the VGA monitor. This is accomplished internally to the DX8100 and therefore no external connection is required. For information about installing the MUX Card in the DX8100, refer to the DX8100 8/16-Channel MUX Card Installation manual (C2665M).

No configuration is required in use the MUX Card. For information about how the MUX Card displays video, refer to *Working In Live View* in the DX8100 Operation and Programming Server Application Software manual.

To attach an analog monitor to the MUX Card:

1. Connect one end of a BNC coaxial cable to the analog monitor.
2. Connect the other end of the BNC cable to MUX Card BNC connector.

Appendix C: Connecting Audio Devices

This appendix describes how to connect audio devices to the DX8100. Before using the audio recording features of the DX8100, consult the applicable laws regarding audio surveillance recording for your location.

SETTING UP STANDARD AUDIO INPUTS

The DX8100 provides two standard audio line in and microphone inputs that support 2-channel (right/left) audio recording. Use a miniature phone plug to connect audio devices to the DX8100. For information about configuring the DX8100 to record audio, refer to the DX8100 Operation and Programming Server Application Software manual or online Help system.

SETTING UP OPTIONAL AUDIO CONNECTIONS

If more audio inputs are required, the DX8100 supports an 8-channel (DX8108-AUD) and 16-channel (DX8116-AUD) audio expansion option.

Expansion audio inputs correspond to video inputs as follows:

- An 8-channel accepts up to 8 audio inputs.
- A 16-channel DVR accepts up to 16 audio inputs.
- A 24-channel DVR accepts up to 24 audio inputs.
- A 32-channel DVR accepts up to 32 audio inputs.

Audio and video inputs are configured in a one-to-one relationship. For example, audio input seven corresponds to video channel seven.

The DX8100 accepts up to 32 individual monaural audio inputs. Each input is designed to receive a line-level, analog audio signal that is sampled at a rate of 48 kHz (16 bits) by the DX8108-AUD's digital analog converters (DAC). To minimize the amount of storage required to store audio data, the audio stream is down-sampled to 8 kHz (8 bits) for storage and playback.

Audio input is provided through an audio cable consisting of eight RCA connectors wired to a 26-pin breakout connector.

The 26-pin connector connector plugs into the 26-pin Sub-D socket on the capture card. Depending on your system's configuration, either one or two breakout cables will be required to connect the DVR to an audio system.

1. Connect the 26-pin audio breakout connector to the 26-pin Sub-D socket on the capture card to provide 8 or 16 individual audio inputs. Refer to Figure 91.

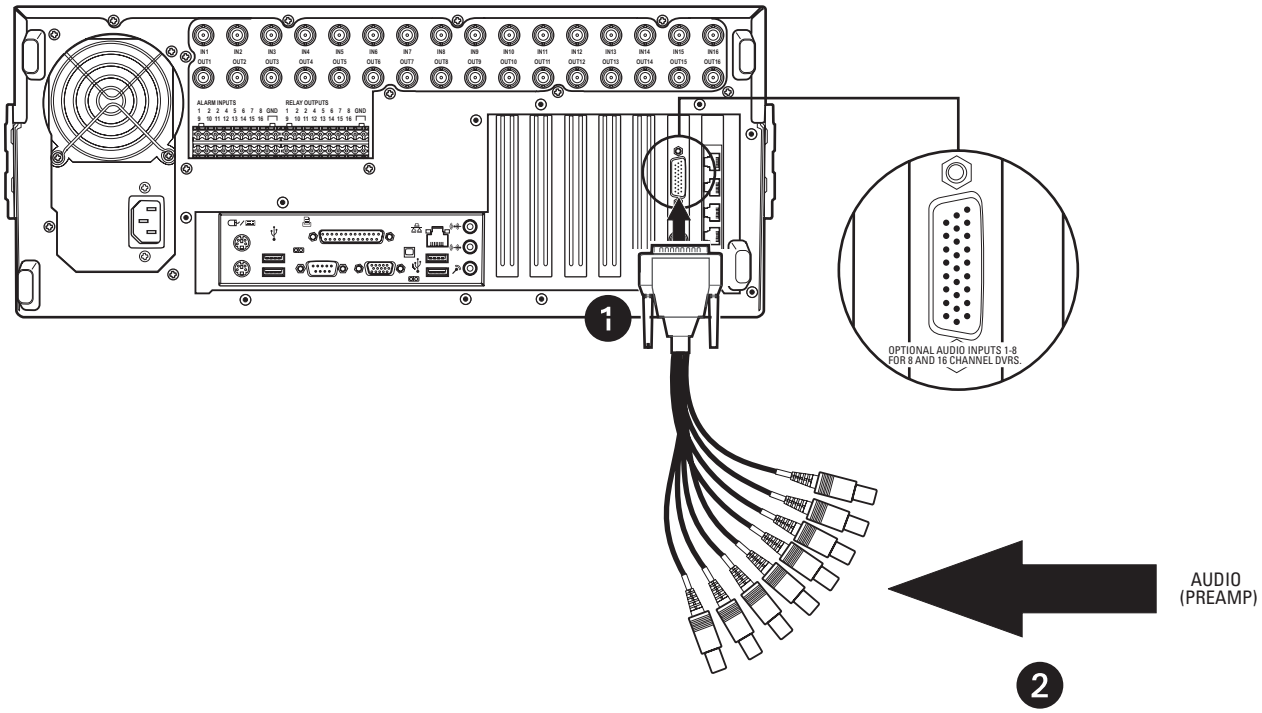

Figure 90. Audio Connector Installation

2. Connect each of the 8 or 16 RCA-type audio connectors to a line-level (+4 dB) gain audio source. Refer to Figure 92.

   The DX8108-AUD/DX8116-AUD option accepts an unbalanced, line-level audio signal only. Line-level signaling requires a voltage between -1 V and +1 V into an impedance of 1 kΩ or more. This means that the output of most microphones will be too low to function when connected directly to the DX8100's audio inputs. In most applications, a preamplifier such as the Louroe Electronics ASK-4® KIT #101 will be required to boost the signal of a microphone to a level that is acceptable for input into the DX8100.

3. Refer to the DX8100 Operation and Programming manual for information about configuring optional audio recording features.

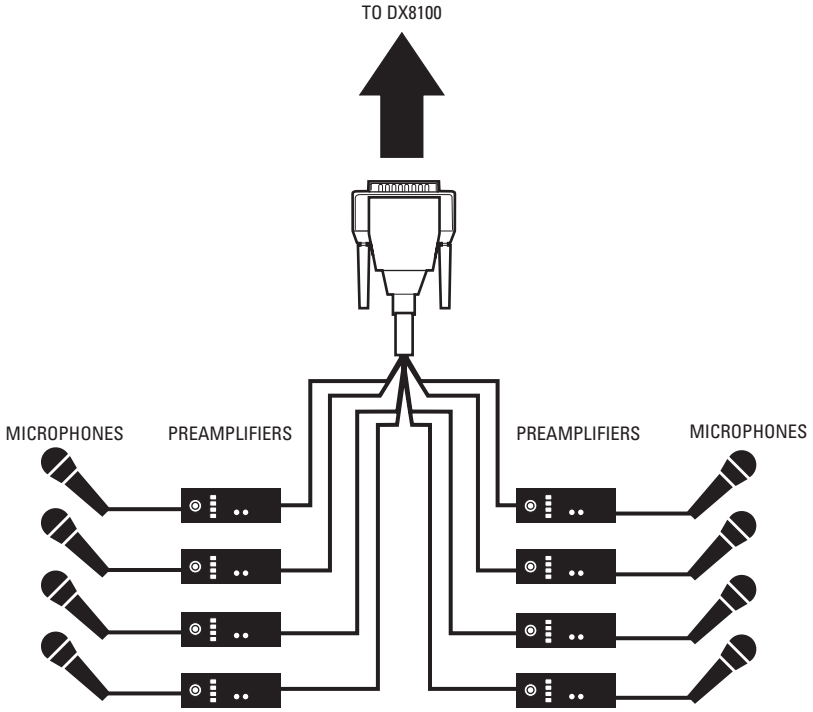

Figure 91. Example: 8-Audio Input Cable Configuration

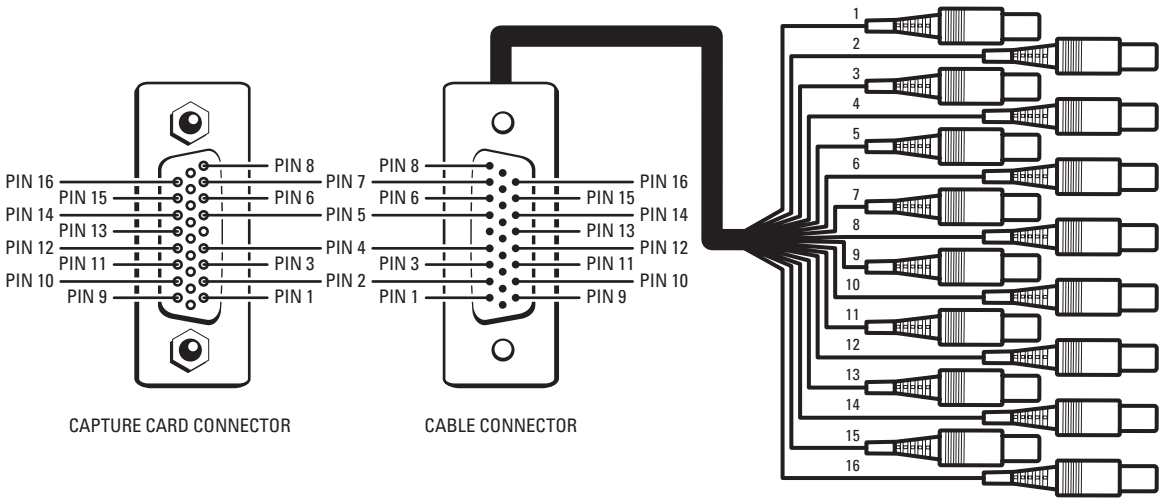

Figure 92. Example: 16-Audio Input Cable Pinouts

SETTING UP AUDIO OUTPUT

The DX8100 delivers a line-level monaural signal through a standard 0.125-inch phone jack on the rear panel of the DVR. It is recommended that the audio output of the DX8100 be connected to an amplifier in order to boost the output signal to a level that is sufficient to drive a speaker. Figure 94 illustrates an example of an audio output configuration.

Some speaker systems integrate both amplifiers and speakers in a single unit. Such a system can be connected directly to the audio output of the DX8100 without the need for external amplification.

To setup the audio output:

1. Connect the audio output of the DX8100 to an audio amplifier.

   Use an audio cable with a 0.125-inch miniature male phone plug on one end to connect to the audio output of the DX8100. Ensure that the opposite end of the cable has the appropriate connectors for connection to your amplifier.

2. Connect the audio amplifier to a speaker.

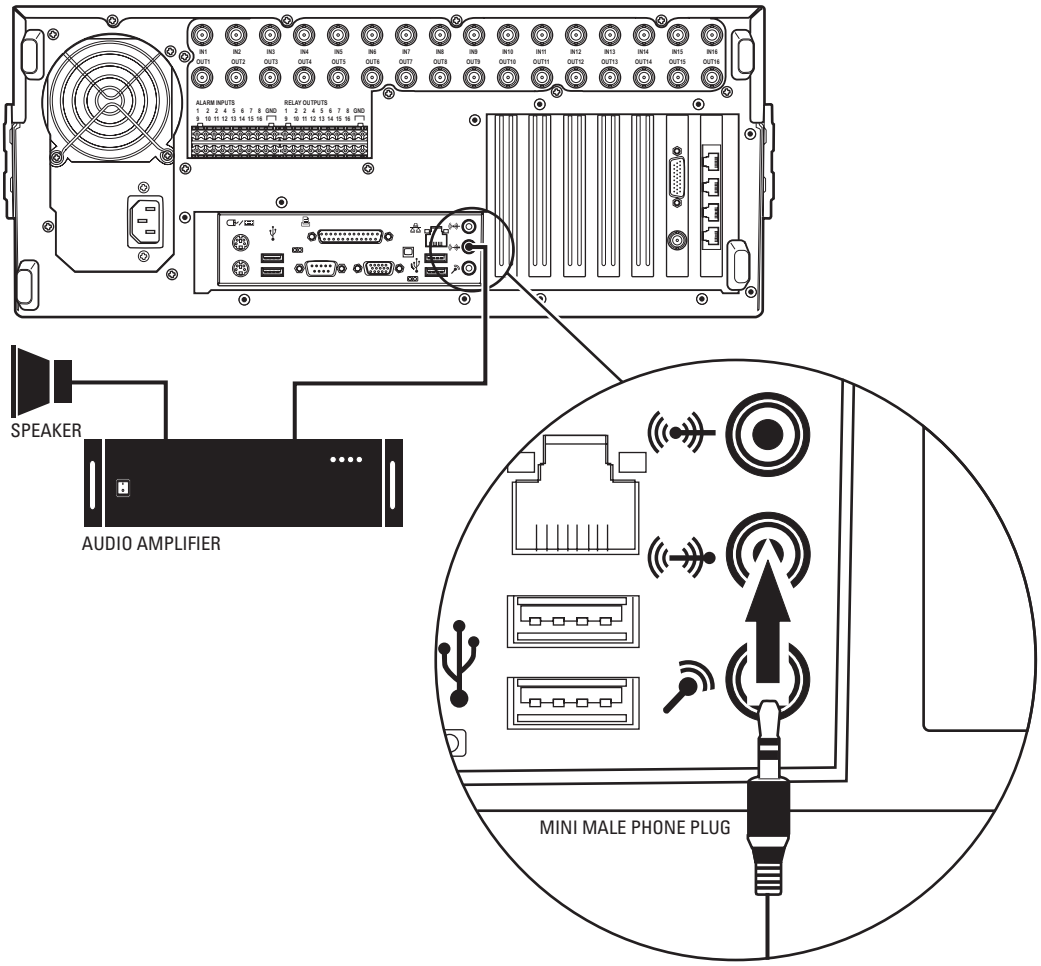

Figure 93. Audio Output Configuration Example

Appendix D: Connecting an Uninterruptible Power Supply (UPS)

If uninterrupted operation is desired and the power grid cannot provide adequate uptime, it is highly recommended that each DX8100 Series DVR be connected to a UPS device (not supplied). A UPS device will supply a limited amount of battery backup power in the event of a power failure. Each UPS device should be configured to shut down its corresponding DVR safely during an extended period on battery power.

Only those UPS devices that exhibit the Designed for Microsoft Windows XP logo and are listed on the Windows 2000 Hardware Compatibility List are approved for use with the DX8100 Series DVR.

⚠ **WARNING:** Do not install on the DX8100 any power management software that may come with your UPS device. The DX8100's operating system includes built-in services designed to communicate with UPS devices that exhibit the Designed for Microsoft Windows XP logo.

The following instructions are meant as a general guide for connecting a UPS device to the DX8100 Series DVR. The example below illustrates the installation of an American Power Conversion UPS. This guide is not intended as a representation of how to install every possible make and model of UPS device. Follow the directions that came with your UPS device to ensure that the installation process is completed properly.

UPS TO DVR COMMUNICATION AND POWER CONNECTIONS

1. Shut down the DX8100. Refer to *Shutting Down* for instructions.
2. Connect the UPS to the DX8100 using a standard USB cable.
3. Connect the other end of the USB cable to one of the four USB 2.0 ports on the back panel of the DVR.
4. Connect the power cord of the UPS to a standard wall socket.
5. Connect the power cord of the DX8100 to one of the power outlets on the UPS.
6. Turn the UPS device power switch on.
7. Turn the DX8100 power switch on.

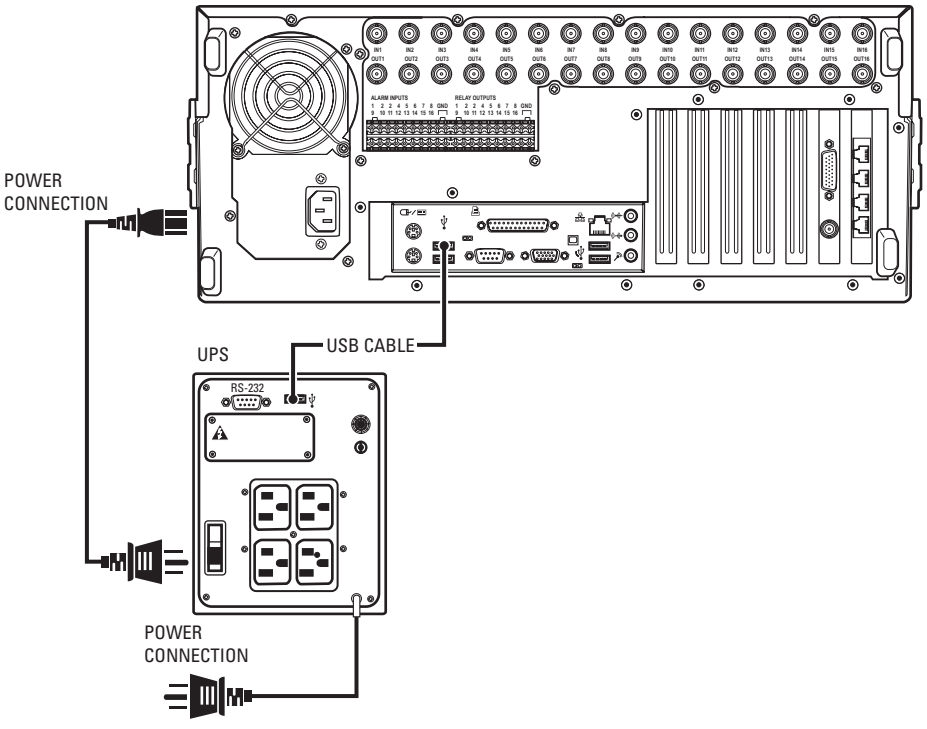

Figure 94. UPS to DX8100 Connections

SOFTWARE SETUP FOR A USB CONNECTED UPS DEVICE

To set up a USB connected UPS device:

1. Log in as an Administrator level user if you are not already.
2. Exit the DX8100 application and return to Windows operating system (refer to *Exiting to Windows Operating System*).
3. Click Start > Settings > Control Panel. The Control Panel opens.

Figure 95. Control Panel Window with Power Options Selected

4. Double-click Power Options. The Power Options Properties dialog box opens.
5. Click the Alarms tab.
6. Adjust the Critical Battery Alarm slider to the desired power level threshold.

   The slider can be adjusted to signal an alarm when UPS battery power falls below the level you select. It is suggested that you set the value that provides at least five minutes of power in order to shut down the DX8100 safely. Refer to the documentation supplied with your UPS to determine the percentage value that will provide at least five minutes of reserve power.
7. Click Alarm Action under "Critical battery alarm." The Power Options Properties dialog box opens.

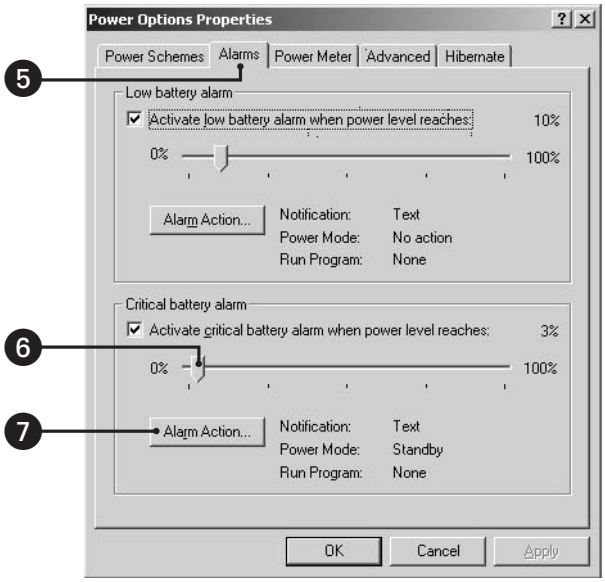

Figure 96. Power Options Properties Dialog Box

8. Select the “When the alarm goes off, the computer will:” check box under “Power level.”
9. Select Power Off from the drop-down list.
10. Click OK.
11. Click Apply.
12. Click OK.

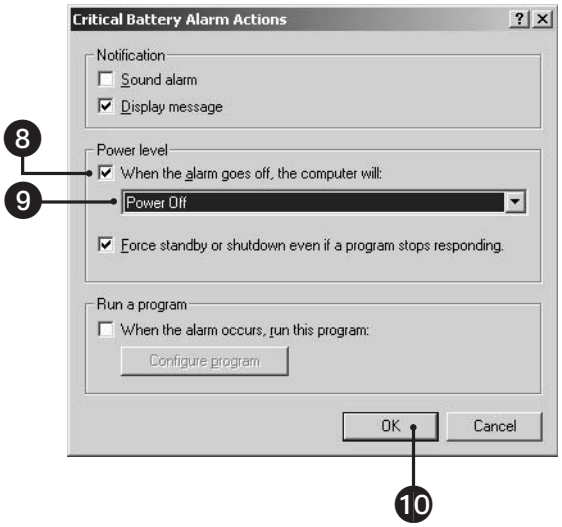

Figure 97. Critical Battery Alarm Actions Dialog Box

Appendix E: External Storage Expansion Using DX9200HDDI

The DX9200HDDI can increase the DX8100's storage capacity by up to 3.5 TB. This option is available for an 8- and 16-channel system.

The DX9200HDDI is used for offline backup or realtime video storage. When used as a real time storage device, the frame rate of each channel on the DX8100 must adhere to the following:

- **8-channel DVRs:** Less than or equal to 30 images per second (ips).
- **16-channel DVRs:** Less than or equal to 24 ips. Setting the frame rate above 24 ips for a 16-channel DVR will result in skipped frames and significant performance degradation.

For information about how to install the DX8100-ISCI SCSI card, configure the DX9200HDDI RAID operation and connect and configure the DX8100 to operate with the 9200HDDI video storage unit, refer to the DX8100-ISCI SCSI and DX9200HDDI Installation manual (C2635M).

Appendix F: Connecting a KBD300A Keyboard

This section describes how to connect the KBD300A keyboard to the DX8100 DVR. The KBD300A allows you to control DX8100 display and camera functions. For example, you can select cameras from the site tree, select view panes and divisions, zoom in and out, and control PTZ operation from the KBD300A keyboard rather than a mouse.

Installation of the KBD300A is accomplished in two steps:

- Hardware installation, which is described in this section.
- Software configuration, which is described in the DX8100 Operations and Programming Manual.

The DX8100 supports the RS-422 data communications protocol to implement the interface with the KBD300A. For more information about setting up KBD300A RS-422 communications settings, refer to Operation and Programming Manual.

Figure 99 illustrates how the KBD300A is connected to the DX8100 server.

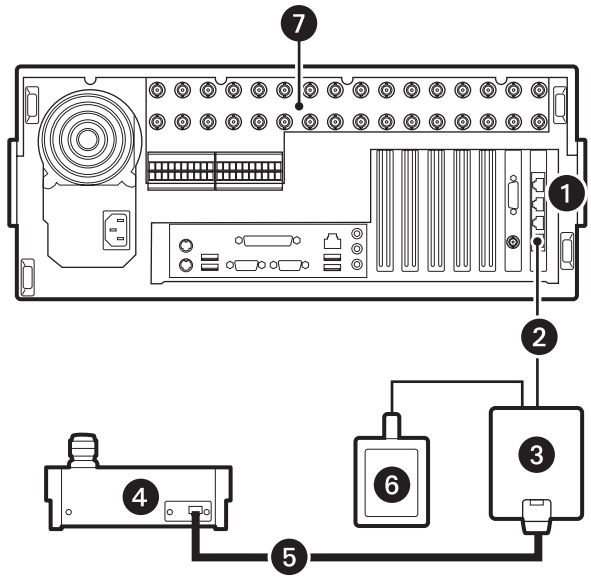

Figure 98. KBD300A Connected to the DX8100

The table below describes parts of the KBD300A and DX8100 installation.

Table F. Parts of the DX8100 and KBD300A Installation

Item	Part	Description
1	RJ-45	The DX8100 provides four RJ-45 ports identified as Port 1–Port 4, with Port 1 being on the bottom.
2	Data cable	A user-supplied cable that connects the RJ-45 wall block to the DX8100.
3	Wall block	A surface mount box that does the following: • Implements data connectivity between the DX8100 and KBD300A. • Implements power connectivity between the 12 VAC transformer and KBD300A.
4	KBD300A	Keyboard.
5	Keyboard data cable	A 25-foot keyboard data and power cable for the KBD300A. The KBD300A uses this cable to connect to the wall block.
6	Wall transformer	A 12 VAC transformer that powers the KBD300A.
7	DX8100	DX8100 server.

REQUIRED ITEMS

You must have the following items to connect the KBD300A to the DX8100 DVR:

- KBD300A keyboard with firmware release version 5.0 or greater: For more information about the KBD300A, refer to the Installation/ Operation KBD300A Universal Keyboard manual.
- KBDKIT series remote wiring kit: For more information about the KBDKIT, refer to *KBDKIT Series Remote Keyboard Wiring Kit*.
- User-supplied Category 5 straight-through RJ-45 data cable.

INSTALLING KBD300A HARDWARE

This section describes how to install the KBD300A hardware and connect the KBD300A to the DX8100 server.

You must set up the KBDKIT first. Figure 100 illustrates how to wire the user-supplied data cable and connect the 12 VAC transform to the wall block. Table G describes the items in the KBDKIT and provides information needed to connect the KBD300A to the DX8100. The only item not included in the KBDKIT is the data cable. The KBDKIT Series Remote Keyboard Wiring Kit manual is included in the kit.

Table G. Items Needed to Install the KBD300A

<table>
<tr><th>Part</th><th>Description</th></tr>
<tr><td>Wall transformer</td><td>KBD300A keyboard power transformer for providing 12 VAC.</td></tr>
<tr><td>RJ-45 wall block</td><td>Wall block.</td></tr>
<tr><td>RJ-45 plug</td><td>RJ-45 plug that mates with the RJ-45 socket on the DX8100.</td></tr>
<tr><td>Data cable</td><td>User-supplied Category 5 data cable with a RJ-45 plug attached to one end. This cable connects the wall block to the DX8100. The RJ-45 pin-out for this cable is as follows:
<table>
<tr><th>Pin</th><th>Signal</th><th>Pin</th><th>Signal</th></tr>
<tr><td>1</td><td>TX+</td><td>5</td><td>Ground</td></tr>
<tr><td>2</td><td>TX-</td><td>6</td><td>NC</td></tr>
<tr><td>3</td><td>12 VAC</td><td>7</td><td>RX-</td></tr>
<tr><td>4</td><td>12 VAC</td><td>8</td><td>RX+</td></tr>
</table>
</td></tr>
</table>

To set up the KBDKIT and install the KBD300A keyboard:

1. Remove the wall block cover.
2. Wire the 12 VAC transformer to the wall block.
3. Construct an RJ-45 Category 5 straight-through cable with no connector on one end that is wired to the correct pin-out of the RJ-45 port on the wall block.

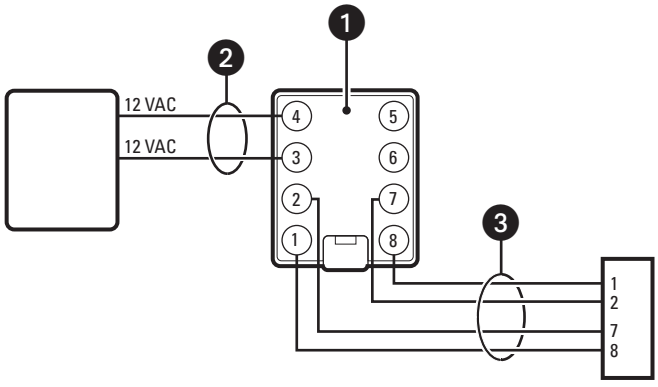

Figure 99. KBDKIT Wall Block and RJ-45 Cable Wiring

4. Connect the RJ-45 data cable from the wall block to a DX8100 RS-422 port (Port 1–4).

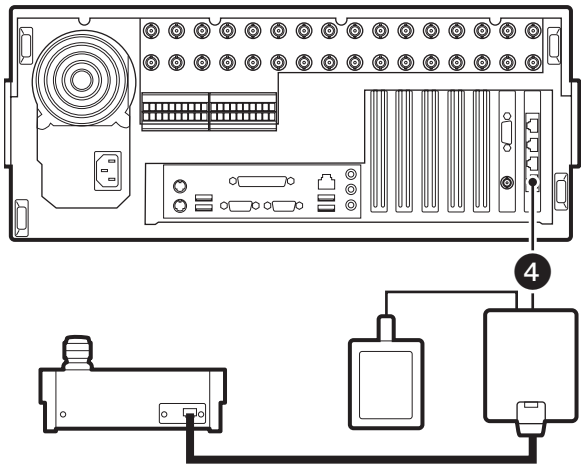

Figure 100. Connecting the KBD300A to the DX8100

SELECTING THE KBD300A OPERATIONAL MODE

You use the KBD300A's DIP switch to set the keyboard's address and select the operational mode.

- Only one KBD300A is attached to the DX8100 at any one time.
- The DX8100 only supports the KBD300A CM6700 mode.

DIP switch positions 1–4 are used to set the keyboard's address. Switch position 5–8 are used to select the operational mode.

To set the KBD300A operate in the CM6700 mode:

1. On the back of the KBD300A, remove the two screws and the DIP switch cover.
2. Set the DIP switch as shown below. In this case, the address is 3 and the operational mode is C6700 ASCII. This mode is only supported in firmware version 5.0 and higher.

Switch	1	2	3	4	5	6	7	8
UP = OFF	OFF		OFF	OFF	OFF			OFF
DOWN = ON		ON				ON	ON	

   For more information about setting the address and selecting the operational mode, refer to the KBD300A Installation/Operation Manual.

3. Replace the DIP switch cover plate.

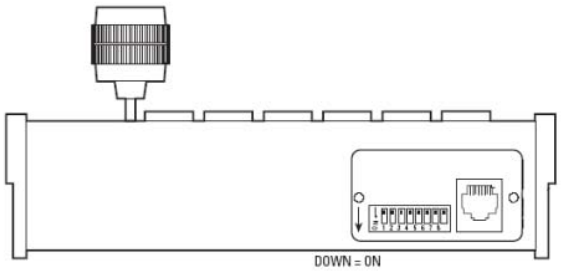

Figure 101. Setting the KBD300A DIP Switch

This concludes the hardware installation phase. Next, you must configure the DX8100 data communications setting for the KBD300A. For more information about setting the DX8100 data communications setting for the KBD300A, refer to the DX8100 Operations and Programming Manual or DX8100 Help.

Appendix G: Connecting ATM/POS Devices

DX8100 version 2.0 supports connection to ATM/POS equipment using the AVE VSI-Pro. The VSI-Pro is designed to interface with many different types of cash registers and POS equipment and allows you to program the VSI-Pro to match your register's communications settings. The VSI-Pro handles the data communication between the ATM/POS device and DX8100, providing a standard compatible RS-422/RS-485 and RS-232 interface to the DX8100.

For information about the VSI Pro and the various types of ATM/POS equipment that it supports, contact AVE:

- Technical Support department at http://www.americanvideoequipment.com/technical_support/index.html.
- Customer Service department at http://www.americanvideoequipment.com/customer_service/index.html.

Installation of ATM/POS devices and the VSI-Pro is accomplished in two steps:

- **Hardware installation:** Hardware installation requires that you do the following:
  - Connect the VSI-Pro to the ATM/POS device. For information about connecting your VSI-Pro to the ATM/POS device, refer to the VSI-PRO Operation Manual and the documentation that came with your ATM/POS device.
  - Connect the VSI-Pro to the DX8100. For information about connecting the VSI-Pro the DX8100, refer to *Configuring DX8100 ATM/POS Communication Options*.
- **Software configuration:** Software configuration entails doing the following:
  - Programming the VSI-Pro to communicate with your ATM/POS device. For information about programming the VSI-Pro, refer to the VSI-PRO Operation Manual.
  - Setting up the DX8100 to interface with the VSI-Pro. For information about setting up the DX8100 to communicate with the VSI-Pro, refer to the DX8100 server operation/programming manual or DX8100 application Help.

ATM/POS CONFIGURATIONS

Table H summarizes the supported ATM/POS configurations and items required to implement the configuration.

Table H. ATM/POS Configurations

Connection Type	Required Items
RS-232 (COM 1/COM 2)	The DX8100 supports interfacing ATM/POS devices using one of both of the RS-232 COM ports via a DB9 connector. The following items are required: • One AVE VSI-PRO Version 12.00 or higher device for each ATM/POS device. • One AVE triport cable for each ATM/POS device. The cable is required for connecting the ATM/POS device to the VSI-PRO and to connect the VSI-PRO to the DX8100 RS-232 COM 1 or COM 2 port.
RS-422 (Port 1–4)	The DX8100 supports interfacing ATM/POS devices using the RS-422 communications ports (Port 1-4) via a RJ-45 connector. Up to four each of the following items are required: • AVE VSI-PRO Version 12.00 or higher device for each ATM/POS device. • AVE triport cable for each ATM/POS device. The cable is required for connecting the ATM/POS device to the VSI-PRO and to connect the VSI-PRO to the PV140 RS-232/422 Converter Kit. • PV140 RS-232/422 Converter Kit. • User-supplied Category 5 straight-through RJ-45 data cable. This cable is required to connect the PV140 RS-232/422 Converter Kit to the DX8100 RS-422 RJ-45 port. For more information about the PV140 RS-232/422 Converter Kit, refer to PV140 RS-232/422 Converter Kit Installation manual.

CONNECTING ATM/POS HARDWARE

This section describes how to connect ATM/POS devices to the DX8100 server using the VSI-PRO. Direct connection between an ATM/POS device and the DX8100 without using the VSI-PRO is not supported.

Go to URL http://www.Americanvideoequipment.com/technical_support/vsi_compatibility.htm to verify that your ATM/POS device is listed in the VSI Compatibility table.

This section is organized as follows:

- RS-232 ATM/POS Device Configuration
- RS-422 ATM/POS Device Configuration

USING THE VSI-PRO TRIPORT CABLE

Figure 103 illustrates the VSI-PRO Dresser Wayne DB9-to-DB9 Triport cable used to interconnect between the ATM/POS, VSI-PRO, and DX8100 server. For specific details regarding ATM/POS device cabling requirements, refer to the VSI-PRO operations manual.

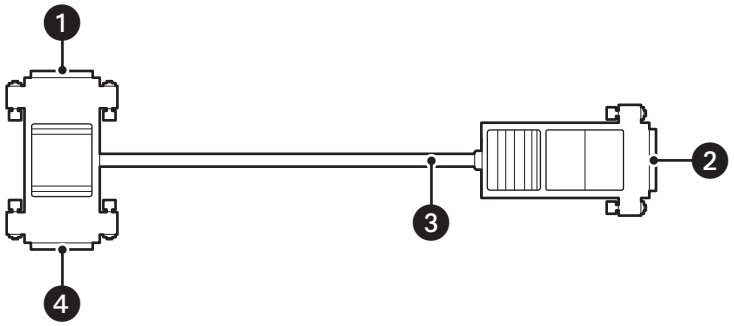

Figure 102. VSI-PRO DB9-to-DB9 Triport Cable

The table below describes the VSI-PRO DB9-to-DB9 triport cable.

Table I. VSI-PRO DB9-to-DB9 Triport Cable

<table>
<tr><th>Item</th><th>Part</th><th>Description</th></tr>
<tr><td>1</td><td>DB9 (male)</td><td>DB9 male connector that interfaces with the VSI-PRO. The VSI-PRO reroutes signals to the DX8100 according to the following pin assignments:
<table>
<tr><th>VSI-PRO</th><th>DX8100</th></tr>
<tr><td>Pin 3: TD</td><td>Pin 2: RD</td></tr>
<tr><td>Pin 7: RTS</td><td>Pin 5: SGND</td></tr>
</table></td></tr>
<tr><td>2</td><td>DB9 (male)</td><td>DB9 male connector that connects the VSI-PRO to the DX8100. The pin assignments are as follows:
• Pin 2: RD
• Pin 5: SGND</td></tr>
<tr><td>3</td><td>Cable</td><td>The cable length is 3 feet (0.91 m).</td></tr>
<tr><td>4</td><td>DB9 (female)</td><td>DB9 female connector that connects the ATM/POS device to the VSI-PRO.</td></tr>
</table>

SETTING UP A RS-232 ATM/POS DEVICE CONFIGURATION

This section describes how to set up a RS-232 ATM/POS device configuration. You use the RS-232 ATM/POS device configuration to record searchable ATM/POS data that is synchronized with recorded video. In this configuration, the camera is connected directly to the DX8100 camera input. The ATM/POS data is routed through the VSI-PRO to the DX8100 RS-232 communications port. ATM/POS output is recorded by the DX8100 as data. Once recorded, the ATM/POS data is searchable and can be displayed synchronously with the recorded transaction video.

Figure 104 illustrates a RS-232 ATM/POS device configuration. One or two ATM/POS devices can be connected to the DX8100. One camera is shown, but multiple cameras can be assigned to monitor the ATM/POS event from different physical positions. For specific details about the DX8100 back panel, refer to Figure 11 on page 23.

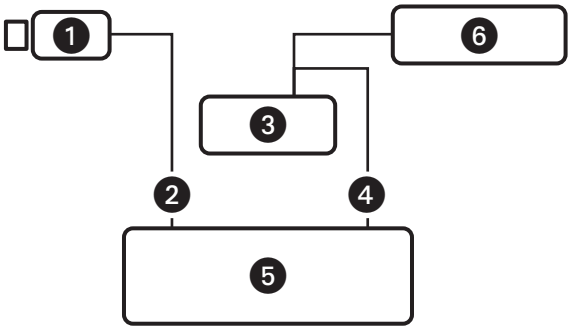

Figure 103. RS-232 ATM/POS Device Configuration

The table below describes the items required for the RS-232 ATM/POS device configuration.

Table J. Items Required for a Single RS-232 ATM/POS Device Configuration

Item	Part	Description
1	Camera	The designated camera positioned to monitor the ATM/POS event. One or more cameras can be configured to respond to an ATM/POS event.
2	Video cable	A user-supplied cable that connects the camera to the DX8100 video input.
3	VSI-PRO	AVE VSI-PRO ATM/POS interface.
4	Data cable	AVE triport cable used to connect the ATM/POS device to the VSI-PRO and to connect the VSI-PRO to the DX8100 RS-232 COM1 or COM2 port.
5	DX8100 server	The DX8100 DVR.
6	ATM/POS device	The ATM/POS device.

Figure 105 illustrates a dual ATM/POS device configuration.

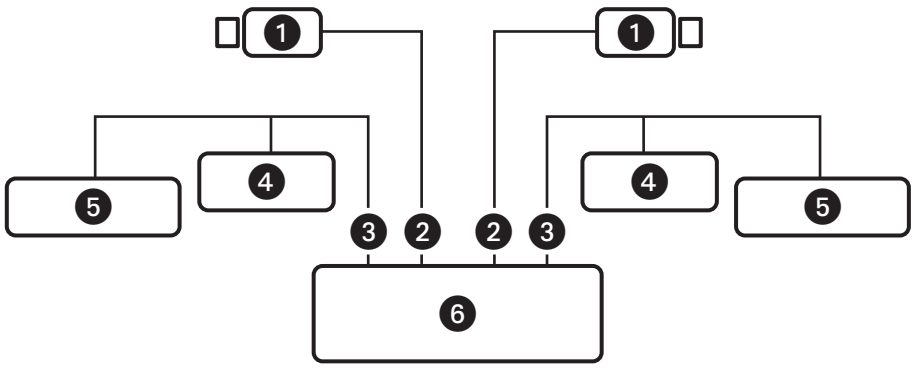

Figure 104. RS-422 ATM/POS Device Configuration

The table below describes the items required for the RS-422 ATM/POS device configuration.

Table K. Items Required for a Dual RS-422 ATM/POS Device Configuration

Item	Part	Description
❶	Camera	The designated cameras positioned to monitor the ATM/POS event. One or more cameras can be configured to respond to an ATM/POS event.
❷	Video cable	A user-supplied video cables that connect the cameras to the DX8100 video input.
❸	Data cable	AVE triport cable used to connect the ATM/POS device to the VSI-PRO and to connect the VSI-PRO to the DX8100 RS-232 COM1 or COM2 port.
❹	VSI-PRO	AVE VSI-PRO ATM/POS interface.
❺	ATM/POS device	The ATM/POS device.
❻	DX8100 server	The DX8100 DVR.

To connect the ATM/POS device and VSI-PRO in a RS-232 ATM/POS configuration:

1. Use the appropriate AVE cable to connect the VSI-PRO to the ATM/POS device. For information about connecting the VSI-PRO and ATM/POS device, refer to the ATM/POS installation and VSI-PRO VSI-PRO Version 12.00 Operation Manual.
2. Connect the AVE RS-232 cable to the DX8100 COM1 or COM2 port.
3. Connect the VSI-PRO power transformer into the VSI-PRO.
4. Plug the VSI-PRO power transformer into an appropriate AC power source.

SETTING UP A RS-422 ATM/POS DEVICE CONFIGURATION

This section describes how to set up a RS-422 ATM/POS device configuration. This configuration is applicable for applications that have one to four ATM/POS devices. You use the RS-422 ATM/POS device configuration to record searchable ATM/POS data that is synchronized to recorded transaction video. You can configure multiple cameras to be associated with a transaction event.

In this configuration, the camera is connected directly to the DX8100 camera input. The ATM/POS data from each ATM/POS device is routed through its respective VSI-PRO to a DX8100 RS-422 port. ATM/POS output is recorded by the DX8100 as data. Once recorded, the ATM/POS data is searchable and can be displayed synchronous with the transaction video.

Interface connection for this configuration is summarized as follows:

1. Each respective camera is connected directly to the DX8100 camera input.
2. Each ATM/POS device is connected as follows:
    a. Each ATM/POS device is connected to a separate VSI-PRO.
    b. Each VSI-PRO device is connected to a PV140 RS-232/422 converter.
    c. Each PV140 is connected to a DX8100 RS-422 port through a user-provided RJ-45 cable.

ATM/POS output is recorded by the DX8100 as data. Once recorded, the ATM/POS data is searchable and can be displayed synchronous with the transaction video.

Figure 106 illustrates a RS-422 ATM/POS device configuration.

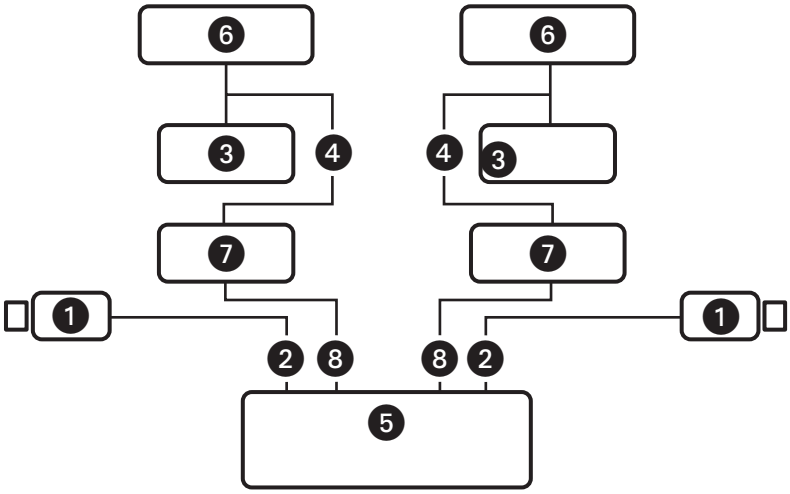

Figure 105. Multiple ATM/POS Device Configuration

The table below describes the items required for the multiple ATM/POS device configuration.

Table L. Items Required for the Multiple ATM/POS Device Configuration

Item	Part	Description
1	Camera	The designated cameras positioned to monitor the ATM/POS event. One or more cameras can be configured to respond to an ATM/POS event.
2	Video cable	A user-supplied cables that connects the cameras to the DX8100 video input.
3	VSI-PRO	AVE VSI-PRO ATM/POS interface.
4	Triport cable	AVE triport cable used to connect the ATM/POS device to the VSI-PRO and to connect the VSI-PRO to the PV140.
5	DX8100 server	The DX8100 DVR.
6	ATM/POS device	The ATM/POS device.
7	PV140	A RS-232 to RS-422 converter that provides a bidirectional electrical interface between RS-232 and RS-422 data ports.
8	Data cable	User-supplied RJ-45 cable that connects the PV140 to Port 1 to 4 of the DX8100 DVR. The cable is constructed with a two-wire pigtail on one end and an RJ-45 plug on the other. For information about the RJ-45 plug wiring, refer to Figure 11 on page 23.

PV140-to-RS-422 Connection

Figure 107 illustrates the cabling requirements to implement PV140-to-RS-422 connectivity to the DX8100 RJ-45 port.

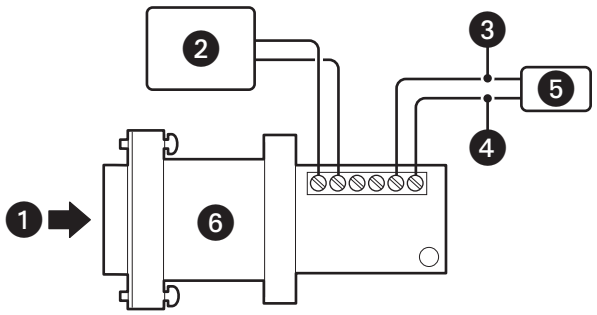

Figure 106. PV140 RS-232 to RS-422/485 Converter

The table below describes the PV140 RS-232 to RS-422 converter.

Table M. VSI-PRO DB9-to-DB9 Triport Cable

Item	Part	Description
❶	DB9 (female)	PV140 DB9 female connector that interfaces with the triport DB9 male connector. The VSI-PRO triport DB9 male connector pin assignments and the PV140 terminal wiring pin assignments are described below.
❷	Power supply	PV140 power transformer provides 12 VDC.
❸	Transmit data	PV140 terminal TX+, which connects to the pin 8 (RX+) of the DX8100 RJ-45 connector. For information about the DX8100 back panel, refer to Figure 11 on page 23.
❹	Transmit data	PV140 terminal TX-, which connects to the pin 7 (RX-) of the DX8100 RJ-45 connector. For information about the DX8100 back panel, refer to Figure 11 on page 23.
❺	RJ-45	User-supplied RJ-45 connector that interfaces the ATM/POS device to DX8100 Port 1–4.

Table N. PV140 DB9 Pinouts

Triport DB9 Male	User-Supplied RJ-45 Cable
Pin 2: RD	Pin 2: RD
Pin 5: SGND	Pin 5: SGND

Connecting ATM/POS Devices via RS-422

To connect ATM/POS devices in a RS-422 configuration:

1. Use the appropriate AVE cable to connect each additional VSI-PRO to an ATM/POS device.
2. Set up one PV140 RS-232 to RS-422 converter and user-supplied RJ-45 cable for each ATM/POS device. For installation instructions, refer to the PV140 RS-232/422 Converter Kit Installation manual.

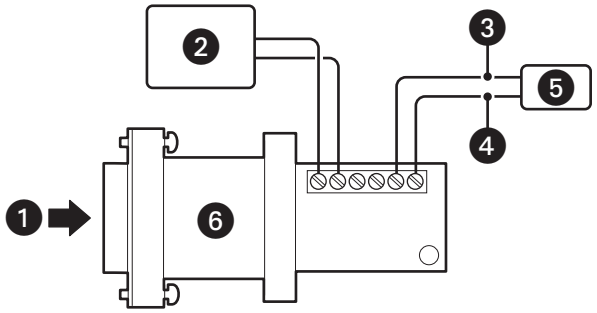

Figure 107. PV140 and User-Supplied RJ-45 Cable Wiring

3. Insert the RJ-45 plug into Port 1–4 as required.

CONFIGURING DX8100 ATM/POS COMMUNICATION OPTIONS

Once you have installed the ATM/POS device(s), you must configure the DX8100 to communicate with the ATM/POS device(s). This section describes how to set up DX8100 ATM/POS options. For more information about configuring DX8100 ATM/POS options, refer to the DX8100 Operations and Programming Manual or the DX8100 server online Help.

To configure the DX8100 to communicate with the ATM/POS device(s):

1. On the DX8100 toolbar, click . The Setup dialog opens to the Camera page.
2. In the Setup dialog box, click . The Network page is displayed.
3. In the Network page, click the Port/Device tab. The Port/Device page is displayed.
4. Do the following:
   a. In the Communication Port drop-down box, select a port (COM1 or Port 1 to Port 4).
   b. In the device drop-down box, select ATM/POS.
   c. Configure the following port settings using the drop-down boxes provided.
      - Interface mode
      - Baud rate
      - Parity
      - Data bits
      - Stop bits

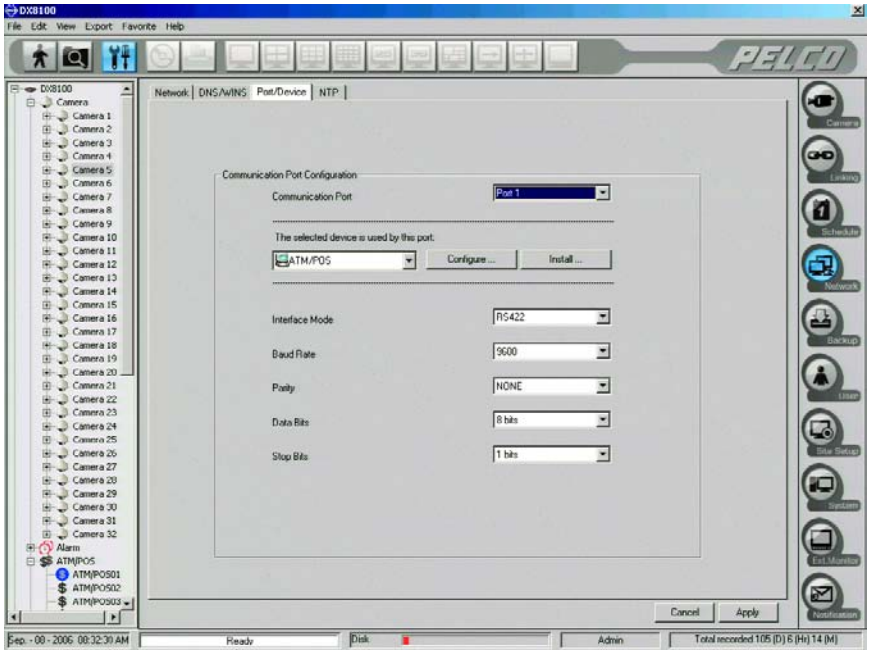

Figure 108. Port/Device Page

5. In the Port/Device page, do the following:
   a. In the Communication Port Configuration section, click Configure. The Device Configuration dialog box opens.
   b. In the Device Mode drop-down box, select a mode. Single mode is the default mode.
   c. Click Apply.

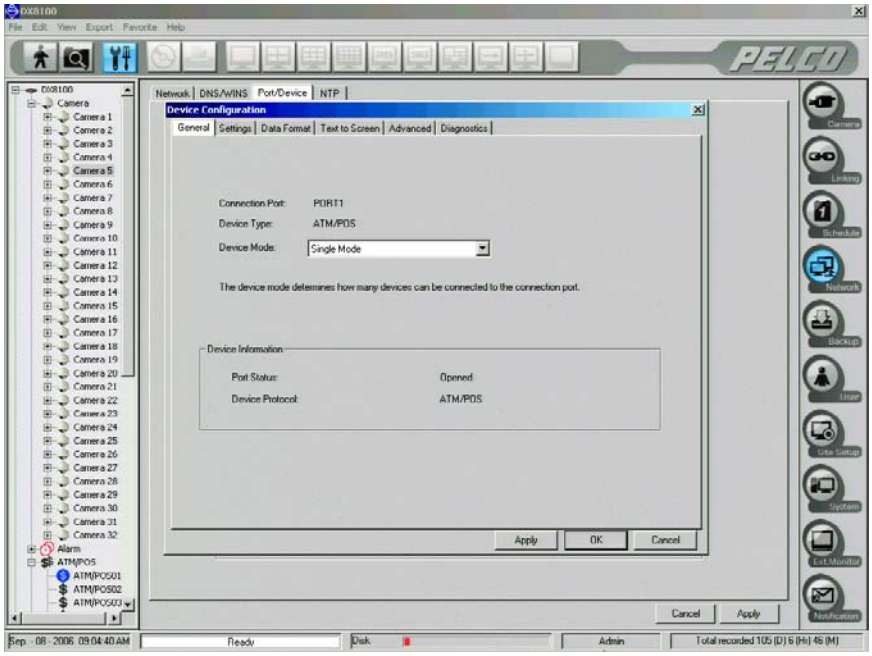

Figure 109. Device Configuration Page: General Tab

6. In the Device Configuration page, do the following:
   a. Click Data Format. The Data Format List page is displayed.

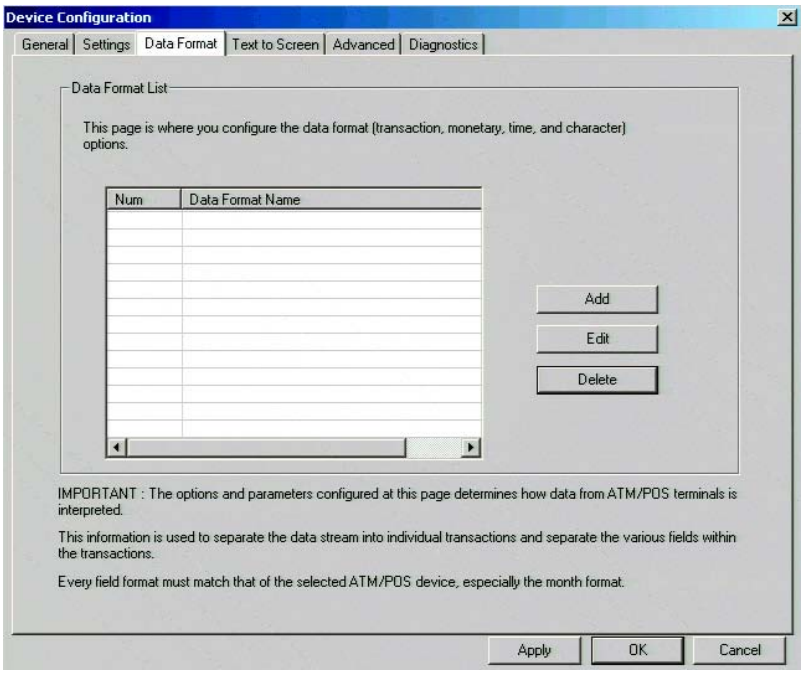
Device Configuration
General
Settings
Data Format
Text to Screen
Advanced
Diagnostics
Data Format List
This page is where you configure the data format (transaction, monetary, time, and character) options.
Num
Data Format Name
Add
Edit
Delete
IMPORTANT : The options and parameters configured at this page determines how data from ATM/POS terminals is interpreted.
This information is used to separate the data stream into individual transactions and separate the various fields within the transactions.
Every field format must match that of the selected ATM/POS device, especially the month format.
Apply
OK
Cancel

Figure 110. Data Format List Page

b. To create a data format, click Add. The Data Format dialog box opens.

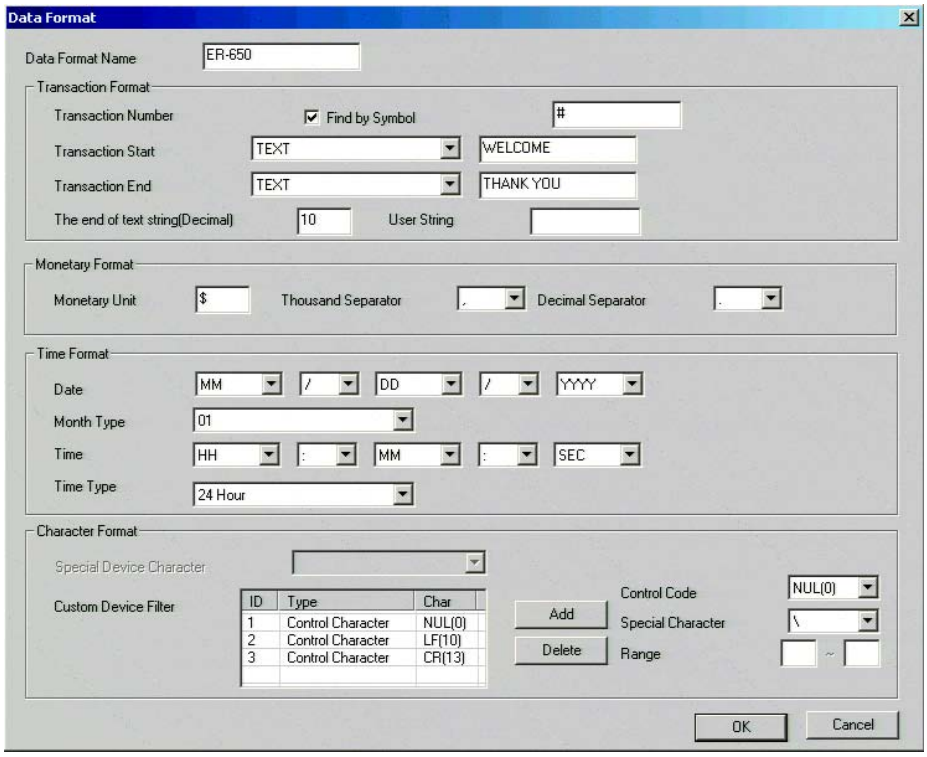

Figure 111. Data Format Dialog Box

7. Using the information from the transaction record or other source, set the parameters for the following Data Format sections (as applicable):
   - Transaction Format
   - Monetary Format
   - Time Format
   - Character Format
8. Click OK. The Data Format page is re-displayed and the newly created data format is listed in the Data Format List.

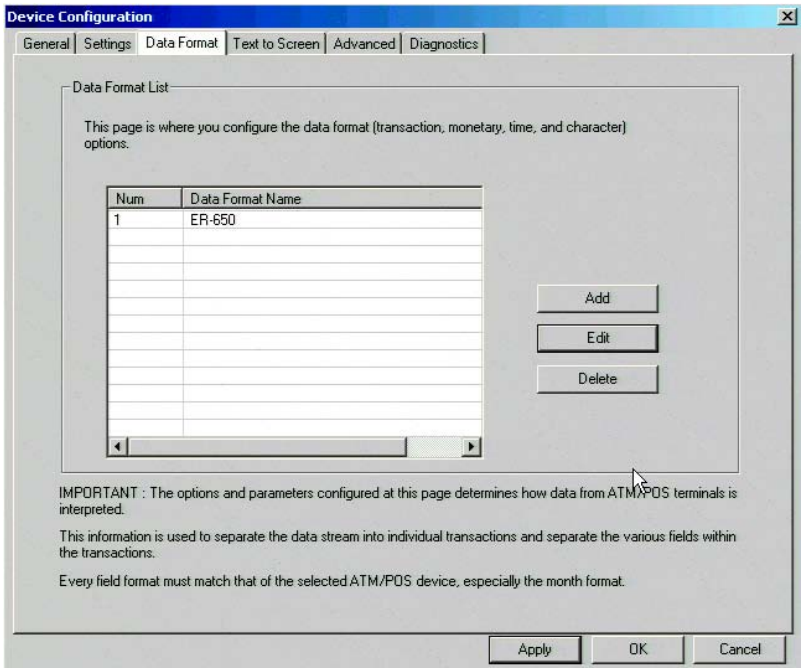
Device Configuration
General
Settings
Data Format
Text to Screen
Advanced
Diagnostics
Data Format List
This page is where you configure the data format (transaction, monetary, time, and character) options.
Num
Data Format Name
1
ER-650
Add
Edit
Delete
IMPORTANT : The options and parameters configured at this page determines how data from ATM/POS terminals is interpreted.
This information is used to separate the data stream into individual transactions and separate the various fields within the transactions.
Every field format must match that of the selected ATM/POS device, especially the month format.
Apply
OK
Cancel

Figure 112. Data Format List

9. In the Device Configuration page, do the following:
    a. Click the Settings tab. The Available ATM/POS Device table is displayed.
    b. In the Device ID column, click the check box to select an ATM/POS device.
    c. Double-click the Data Format cell for the selected ATM/POS device. The Data Format cell drop-down box is displayed.
    d. Click in the Data Format cell to display the available data formats.
    e. Select the data format you want to assign to the ATM/POS device.
    f. Do one of the following:
        - Click Apply to confirm selection and remain in the Device Configuration dialog box.
        - Click OK to confirm selection and return to the Port/Device page.

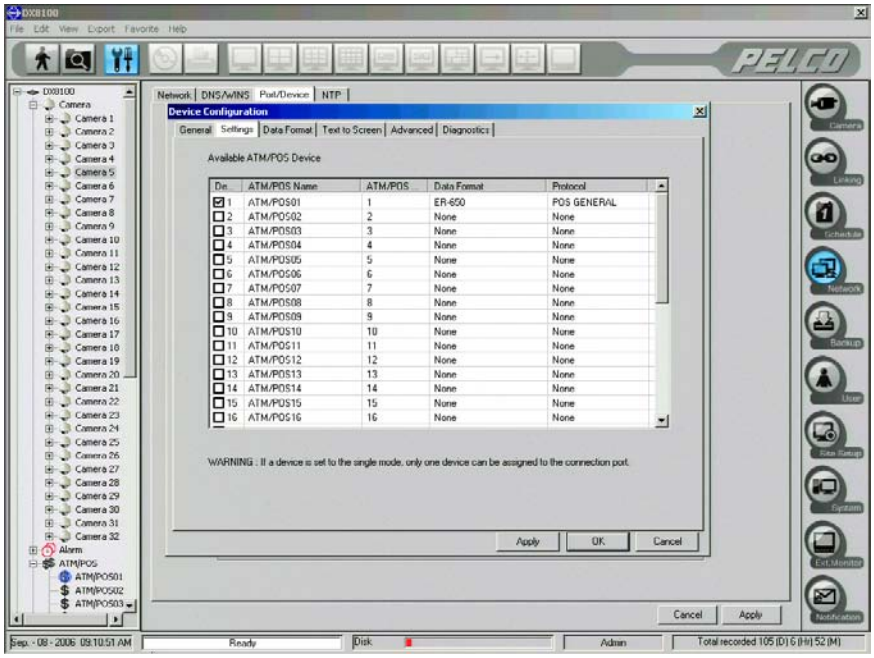

Figure 113. Assigning a Data Format to An ATM/POS Device

10. Click . The Linking setup page is displayed.

11. Click Event-Recording Link Settings. The Event-Recording Link Settings page is displayed.

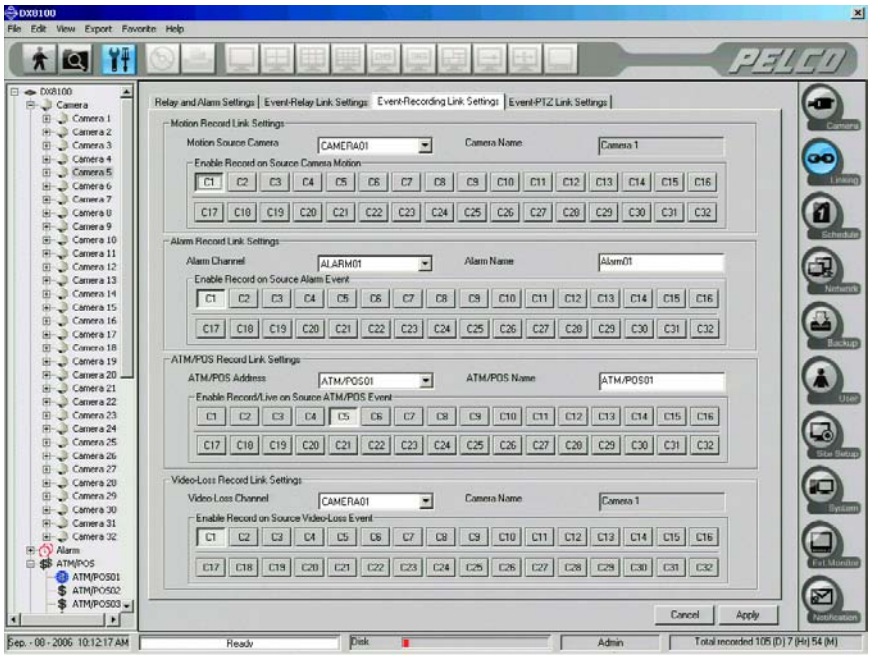

Figure 114. Event-Recording Link Settings Page

12. In the ATM/POS Record Link Settings area, do the following:
    a. In the ATM/POS Address drop-down box, select an ATM/POS01 address.
    b. In the Enable Record/Live on Source ATM/POS Event area, click a camera to link the camera to the ATM/POS address.
    c. Click Apply.
13. Click . The Schedule setup page is displayed.
14. Create an ATM/POS schedule for the camera you linked to the ATM/POS address.

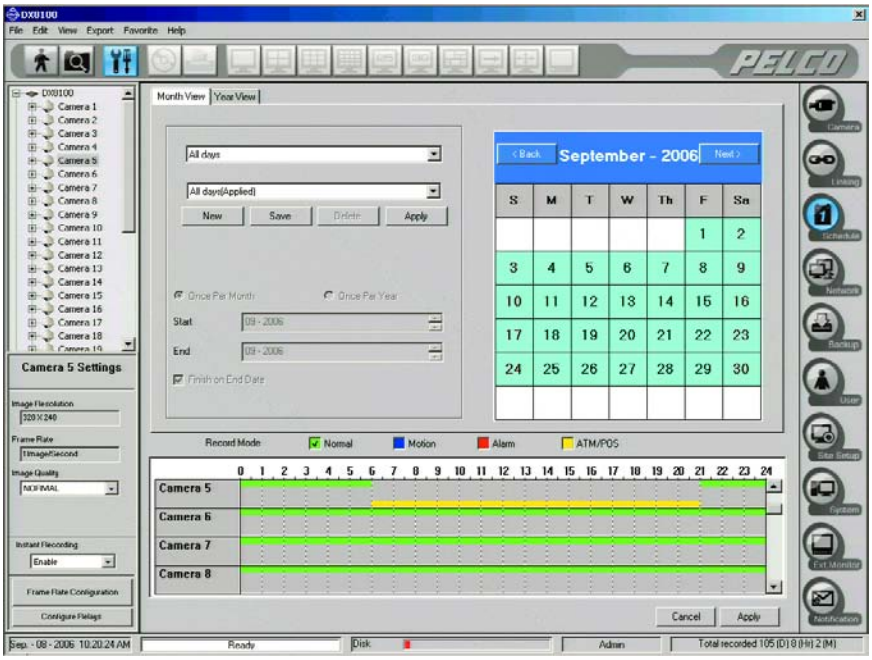

Figure 115. Schedule Setup Page

15. On the DX8100 toolbar, click . The DX8100 live view mode is displayed.

16. Drag the camera linked to an ATM/POS address to a view pane.

17. From the DX8100 menu bar, click View > OSD > POS. ATM/POS transaction data is displayed in the view pane for the camera linked to the ATM/POS address.

Figure 116. Example of ATM/POS Data Transaction Recording

Specifications

ELECTRICAL/VIDEO

Input Voltage:	100-240 VAC ±10%, 50/60 Hz, autoranging*
Power Consumption:	Maximum 350 watts
Signal System:	NTSC/PAL
Operating System:	Windows XP Embedded only
Recording Resolutions:	NTSC: 320 x 240, 640 x 240, 640 x 480, 352 x 240, 704 x 240, 704 x 480 PAL: 320 x 288, 640 x 288, 640 x 576, 352 x 288, 704 x 288, 704 x 576
Compression:	Pelco proprietary
Video Inputs:	8/16/24/32 (looping with automatic termination)
VGA Outputs:	1
Analog Video Outputs:	1 with DX8108 and DX8116 2 with DX8124 and DX8132
Alarm Input Terminals:	8/16/24/32 (user selectable N.O./N.C.)
Relay Output Terminals:	8/16/24 (user selectable, N.O./N.C.)
Relay Contact Ratings**	
Rated (Resistive) Load:	0.5 A at 120 VAC or 1 A at 24 VDC
Remote Administration:	Full remote control via TCP/IP network
Total Recording Rate:	Up to 480 images per second at CIF Up to 240 images per second at 2CIF Up to 120 images per second at 4CIF

MECHANICAL

Connectors	
BNC:	Video inputs and outputs
6-Pin Mini-DIN:	PS/2 mouse and keyboard
DB9:	COM 1
DB15:	VGA port
DB26:	Optional audio option
RJ-45:	10/100/1000 megabit Ethernet port and RS-485/RS-422 ports
Audio Connectors:	3 miniature phone jacks: line in, microphone in, and audio out
USB:	6 high-speed USB 2.0 ports (2 in front, 4 in rear)

ENVIRONMENTAL

Operating Temperature:	50° to 95°F (10° to 35°C)
Relative Humidity:	Maximum 80%, noncondensing

GENERAL

Dimensions	
Desktop:	19.9 (D) x 17.0 (W) x 7.0 (H) inches (50.55 x 43.18 x 17.78 cm)
Rack Mount:	22.0 (D) x 19.0 (W) x 7.0 (H) inches (55.88 x 48.26 x 17.78 cm)
Unit Weight:	47 lb (21 kg) maximum (fully equipped, 32 channel unit)
Shipping Weight:	68 lb (31 kg) maximum (fully equipped, 32 channel unit)

*It is recommended that an uninterruptible power supply (UPS) device be used with the DX8100 with a 700 VA or better rating.
**Relays are grounded.

(Design and product specifications subject to change without notice.

PRODUCT WARRANTY AND RETURN INFORMATION

WARRANTY

Pelco will repair or replace, without charge, any merchandise proved defective in material or workmanship **for a period of one year** after the date of shipment.

Exceptions to this warranty are as noted below:

- Five years on fiber optic products and TW3000 Series unshielded twisted pair transmission products.
- Three years on Spectra® IV products.
- Three years on Genex® Series products (multiplexers, server, and keyboard).
- Three years on Camclosure® and fixed camera models, except the CC3701H-2, CC3701H-2X, CC3751H-2, CC3651H-2X, MC3651H-2, and MC3651H-2X camera models, which have a five-year warranty.
- Three years on PMCL200/300/400 Series LCD monitors.
- Two years on standard motorized or fixed focal length lenses.
- Two years on Legacy®, CM6700/CM6800/CM9700 Series matrix, and DF5/DF8 Series fixed dome products.
- Two years on Spectra III™, Esprit®, ExSite®, and PS20 scanners, including when used in continuous motion applications.
- Two years on Esprit and WW5700 Series window wiper (excluding wiper blades).
- Two years (except lamp and color wheel) on Digital Light Processing (DLP®) displays. The lamp and color wheel will be covered for a period of 90 days. The air filter is not covered under warranty.
- Eighteen months on DX Series digital video recorders, NVR300 Series network video recorders, and Endura™ Series distributed network-based video products.
- One year (except video heads) on video cassette recorders (VCRs). Video heads will be covered for a period of six months.
- Six months on all pan and tilts, scanners or preset lenses used in continuous motion applications (that is, preset scan, tour and auto scan modes).

Pelco will warrant all replacement parts and repairs for 90 days from the date of Pelco shipment. All goods requiring warranty repair shall be sent freight prepaid to Pelco, Clovis, California. Repairs made necessary by reason of misuse, alteration, normal wear, or accident are not covered under this warranty.

Pelco assumes no risk and shall be subject to no liability for damages or loss resulting from the specific use or application made of the Products. Pelco's liability for any claim, whether based on breach of contract, negligence, infringement of any rights of any party or product liability, relating to the Products shall not exceed the price paid by the Dealer to Pelco for such Products. In no event will Pelco be liable for any special, incidental or consequential damages (including loss of use, loss of profit and claims of third parties) however caused, whether by the negligence of Pelco or otherwise.

The above warranty provides the Dealer with specific legal rights. The Dealer may also have additional rights, which are subject to variation from state to state.

If a warranty repair is required, the Dealer must contact Pelco at (800) 289-9100 or (559) 292-1981 to obtain a Repair Authorization number (RA), and provide the following information:

1. Model and serial number
2. Date of shipment, P.O. number, Sales Order number, or Pelco invoice number
3. Details of the defect or problem

If there is a dispute regarding the warranty of a product which does not fall under the warranty conditions stated above, please include a written explanation with the product when returned.

Method of return shipment shall be the same or equal to the method by which the item was received by Pelco.

RETURNS

In order to expedite parts returned to the factory for repair or credit, please call the factory at (800) 289-9100 or (559) 292-1981 to obtain an authorization number (CA number if returned for credit, and RA number if returned for repair).

All merchandise returned for credit may be subject to a 20% restocking and refurbishing charge.

Goods returned for repair or credit should be clearly identified with the assigned CA or RA number and freight should be prepaid. Ship to the appropriate address below.

If you are located within the continental U.S., Alaska, Hawaii or Puerto Rico, send goods to:

Service Department
Pelco
3500 Pelco Way
Clovis, CA 93612-5699

If you are located outside the continental U.S., Alaska, Hawaii or Puerto Rico and are instructed to return goods to the USA, you may do one of the following:

If the goods are to be sent by a COURIER SERVICE, send the goods to:

Pelco
3500 Pelco Way
Clovis, CA 93612-5699 USA

If the goods are to be sent by a FREIGHT FORWARDER, send the goods to:

Pelco c/o Expeditors
473 Eccles Avenue
South San Francisco, CA 94080 USA
Phone: 650-737-1700
Fax: 650-737-0933

Green The materials used in the manufacture of this document and its components are compliant to the requirements of Directive 2002/95/EC.

This equipment contains electrical or electronic components that must be recycled properly to comply with Directive 2002/96/EC of the European Union regarding the disposal of waste electrical and electronic equipment (WEEE). Contact your local dealer for procedures for recycling this equipment.

REVISION HISTORY

Manual #	Date	Comments
C2629M	9/06	Original version.
C2629M-A	6/07	Documents video quality statement, new features, optional MUX card and audio connection, and updates client software and DX9200HDDI installation procedures.

Pelco, the Pelco logo, Camclosure, Coaxitron, Esprit, Genex, Legacy, and Spectra are registered trademarks of Pelco.
Spectra III is a trademark of Pelco.
Microsoft, Windows, DirectX, ActiveSync, and ActiveX are registered trademarks of Microsoft Corporation in the United States and/or other countries.
Intel, Pentium, and XScale are registered trademarks of Intel Corporation.
Netscape is a registered trademark of the Netscape Communications Corporation.
StorageWorks is a registered trademark of Compaq Information Technologies Group.
ASK-4 is a registered trademark of Louroe Electronics.
Adobe and Acrobat are registered trademarks of Adobe Systems Incorporated.
Nero is a registered trademark of Nero AG.
McAfee is a registered trademark of McAfee, Inc.
Symantec is a trademark of Symantec Corporation.

©Copyright 2007, Pelco. All rights reserved.

Worldwide Headquarters
3500 Pelco Way
Clovis, California 93612 USA

USA & Canada
Tel: 800/289-9100
Fax: 800/289-9150

International
Tel: 1-559/292-1981
Fax: 1-559/348-1120

www.pelco.com

ISO**9001**

Australia | Canada | Finland | France | Germany | Italy | Macau | The Netherlands | Russia | Singapore
South Africa | Spain | Sweden | United Arab Emirates | United Kingdom | United States